



Heriot-Watt University  
Research Gateway

## Engineering Design 2 Layer Woven Fabric Structures for UV Indexable Textiles

### Citation for published version:

Sun, D, Chen, M, An, KH & Clark, S 2018, 'Engineering Design 2 Layer Woven Fabric Structures for UV Indexable Textiles', *Advance Research in Textile Engineering*, vol. 3, no. 3, pp. 1030-1033.  
<<http://austinpublishinggroup.com/textile-engineering/fulltext/arte-v3-id1030.php#Top>>

### Link:

[Link to publication record in Heriot-Watt Research Portal](#)

### Document Version:

Peer reviewed version

### Published In:

Advance Research in Textile Engineering

### General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

### Take down policy

Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact [open.access@hw.ac.uk](mailto:open.access@hw.ac.uk) providing details, and we will remove access to the work immediately and investigate your claim.

# Engineering Design 2 Layer Woven Fabric Structures for UV Indexable Textiles

Danmei Sun\*<sup>1</sup>, Meixuan Chen<sup>1</sup>, Kang Hyun An<sup>1</sup>, Stuart Clark<sup>2</sup>

<sup>1</sup>School of Textiles and Design, Heriot-Watt University

<sup>2</sup>SolarVis Technology Limited

Corresponding author: [D.Sun@hw.ac.uk](mailto:D.Sun@hw.ac.uk)

## Abstract

The negative effects of sunlight has been known associated with the development of skin cancer, skin aging, immune suppression, and eye diseases. The UV Index is an important parameter to alert people about the need to adopt protective measures. This paper reports a design concept and techniques developed in engineering UV indexable two-layer narrow woven fabrics. The fabrics were made using a type of photochromic yarn and three reference yarns with static colours indicating the level of UV intensity based on the measurement of colour change of the photochromic yarn under different level of UV intensities.

**Keywords:** UV indexable textile, UV index measurement, photochromic yarn, two layer woven fabric

## 1. Introduction

Photochromic pigments were developed for colour changing lenses for sunglasses initially. Their application have been expended in innovative textile and fashion design and many other applicable areas. There are irreversible photochromic pigments made for some specific applications. Other photochromic pigments are reversible that are important type for textile and fashion design. According to the photochromism, the photochromic process may be categorised into several groups including triplet (Gerhardt & Township, 1973), heterolytic cleavage (Mancheva, et al., 2005; Kuhn, et al., 1991), homolytic cleavage (Bamfield, 2001; Crano & Guglielmetti, 1999), trans-cis isomeration (Liu & Hammond, 2003; Birge, et al., 1999), photochromism based on tautomerism (Crano & Guglielmetti, 1999), and photodimerisation (Cicogna, et al., 2004). An example of working principle of photochromic pigments is shown in Fig. 1.

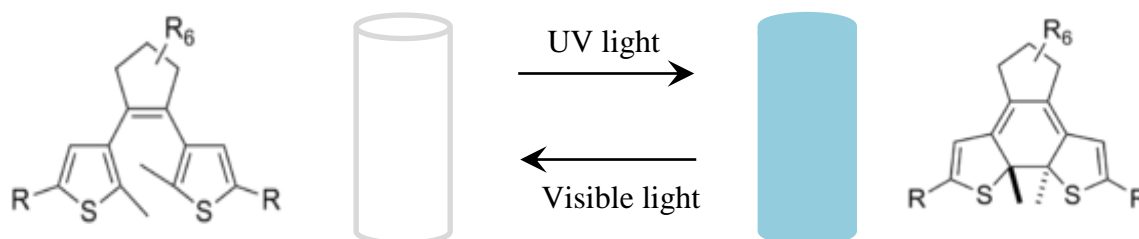


Fig. 1 Working principle of photochromism.

Despite the beneficial effects of both solar and artificial UV radiation have been used in the phototherapy to cure or mitigate skin diseases such as psoriasis, neurodermatitis, scleroderma, lupus, erythematosus, urticarial pigmentosa, vitiligo and acne vulgaris (Krutmann, et al., 1998; Tjioe, et al., 2002; Ross, 2005) solar radiation of certain range of wavelength has negative effects on human health. UV index has been used as a general term for public awareness to identify the risk of high UV doses (Feister, et al., 2011). Detrimental effects to humans such as erythema and skin cancer can be triggered by high values of effective irradiance or high UV dose (Lucas, et al., 2006).

UV index is calculated from a direct measurement of the UV spectral power at a given location. It requires the measurement of the intensity of UV radiation as *UV index (UVI)* (McKinlay & Diffey, 1987). A UV Index reading of 3 to 5 means moderate risk of harm from unprotected sun exposure. There is no such photochromic yarn or ink that is able to indicate or respond to different UV intensities, however the depth of colour will depend on the strength of UV, e.g. colour depth increases with stronger sunlight. The UV index can be calculated from a direct measurement of the UV spectral power at a given location. It requires the measurement of the intensity of UV radiation.

UV protective textiles have been reported by applying ZnO by different techniques and approaches, onto different types of textiles, cellulosic fibres (Thi & Lee, 2017; Xin, et al., 2005), protein fibres (Meena, et al., 2017), and synthetic fibres (Paneva, et al., 2016). UV protection is very important; however UV warning is another element needs to be considered alarming people about the need to use sun protection. This research reports engineering design fabric structures and UV indexable fabrics using colour reversible photochromic yarn and normal yarns with pre-identified reference colours.

## 2. Design principle, materials and testing



### 2.1 Colour reference




The aim of the project is to engineer design textile-based accessories for indoor and outdoor wear, in this case smart watchbands will be designed and engineered. In the watchband a section of patterned photochromic yarn will be designed and its colour under UV light can be compared to other sections of the watchband made of yarns with static reference colours.

### 2.2 Materials

The yarns used for construction the watchband are listed in Table 1.

Table 1 one photochromic yarn and three reference yarns.

900 denier Photochromic PP yarn	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Indoor</p> </div> <div style="text-align: center;">  <p>outdoor at low UV index</p> </div> </div>
Nylon yarn with 'static colour 1'	Reference colour 1, corresponds to the colour of photochromic yarn under low level UV light

	
Nylon yarn with 'static colour 2'	<p>Reference colour 2, corresponds to the colour of photochromic yarn under moderate level UV light</p> 
Nylon yarn with 'static colour 3'	<p>Reference colour 3, corresponds to the colour of photochromic yarn under high level UV light</p> 

Notes: The photochromic yarn was made by Guangzhou Lanjing Chemical Fibre Co. Ltd. The yarns with the three reference colours 1, 2 & 3 were supplied by J.H.Ashworth&son Ltd.

### 2.3 Testing of UV index

A piece of fabric was constructed using the photochromic yarn shown in Fig. 2, which was taken in door.

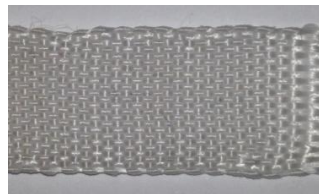


Fig. 2 Fabric made of chromic yarn taken indoor.

A smart UV checker shown in Fig. 3 was used to measure the UV index value in different weather conditions and UV intensities. The UV checker has a semiconductor Sensor that connects to your Smartphone to measure, collect and analyze UV light.

Under all weather conditions tested and UV index values, the developed photochromic fabric (Fig. 4) was tested and the corresponding colours were recorded by using a digital camera as reference colour for watchband design. In the end, three reference colours were identified corresponding to three different UV levels - low, moderate and high.



Fig. 3 UV index checker.

### 3. Results and discussion

#### 3.1 Colour change of the photochromic fabric under different UV intensities

The fabric sample (Fig. 4) was taken to the sunlight in different UV intensity conditions, the change of colour was recorded under different exposure time. The colour of the woven cloth was then compared to the colours of a shade card by doing so to obtain the reference colours corresponding to different UV intensities. The shade card is the Saba<sup>c</sup> polyester core spun thread shade card from AMANN. The comparison of the colours was conducted. The following images show the colour comparison observed. In the end three reference colours were identified corresponding to low, moderate and high UVI values.



Fig. 4 Comparison between the woven sample and the shade card.

In order to use the colour change of the photochromic yarn to indicate different UV intensities, the observation time was set at 20 second in which there is an obvious difference between the colour shade in corresponding to low and moderate UV exposure. According to literature, it is possible to use photochromic material to identify UV exposure because the intensity of the colour has a linear relationship with UV irradiation (Bamfield, 2001). Higher UV radiation triggers higher intensity of the colour. Also, the colour change time is affected by the UV radiation. The two have a negative linear relationship, shorter change time corresponds to higher UV radiation.

#### 3.2 Fabric design and development

Three types of weave structures – plain, twill and satin were selected for the watchband cloth development. For all the three weave structures, two layer cloth is required in order for the face of the fabric has photochromic and reference yarns appear in different sections of the fabric indicated in Fig. 5.

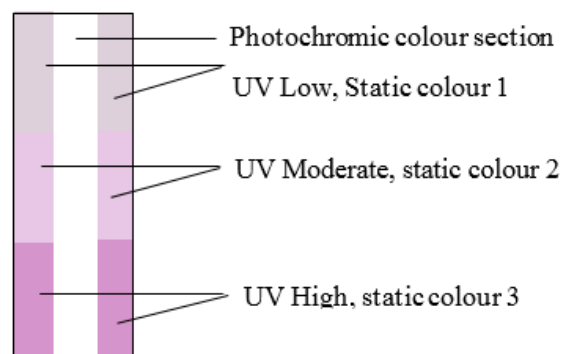


Fig. 5 Colour design with different sections in double layer watchband narrow cloth.

In this research two layer narrow fabrics (20 mm wide) were planned to be used for watchband. The total number of ends of the cloth is 56, warp and weft yarn linear density are 28 and 24 in total which are 14 and 12 ends (or picks)/cm. layer respectively. The detailed weave design, draft and peg plan of the double cloth are shown in Figs. 6 - 8.

(a) plain weave

/		/	√	/		/	√			×				×		/		/	√	/		/	√	P
		×				×		/		/	√	/		/	√			×				×		R
/	√	/		/	√	/		×				×				/	√	/		/	√	/		P
×				×				/	√	/		/	√	/		×				×				R
×2							×3							×2										

(b) twill 2/2

/	√	/	√	/		/		×		×						/	√	/	√	/		/		P
				×		×		/		/		/	√	/	√					×		×		R
/		/	√	/	√	/				×		×				/		/	√	/	√	/		P
		×		×				/		/	√	/	√	/				×		×				R
/		/		/	√	/	√					×		×		/		/		/	√	/	√	P
×		×						/	√	/	√	/		/		×		×						R
/	√	/		/		/	√	×						×		/	√	/		/		/	√	P
×						×		/	√	/		/		/	√	×						×		R
×2							×3							×2										

(c) 4 ends weft sateen

/		/	√	/		/				×						/		/		/		/		P
				×				/		/		/	√	/					√	×				R
/	√	/		/		/		×								/	√	/		/		/		P
						×		/		/		/	√									×		R
/		/		/	√	/						×				/		/		/	√	/		P
		×						/		/	√	/		/				×						R
/		/		/		/	√							×		/		/		/		/	√	P
×								/	√	/		/		/		×								R
×2							×3							×2										

Fig. 6 Weave plan of plain, 2/2 twill and 4 ends weft sateen, where:

‘×’, ‘√’ and ‘/’ indicate the face weave, back weave, and a separating lifter (face end lifts over back pick), respectively. ‘R’ and ‘P’ represent the Reference/indicator Yarn and the Photochromic Yarn respectively.

16																×								
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---	--	--	--	--	--	--	--	--

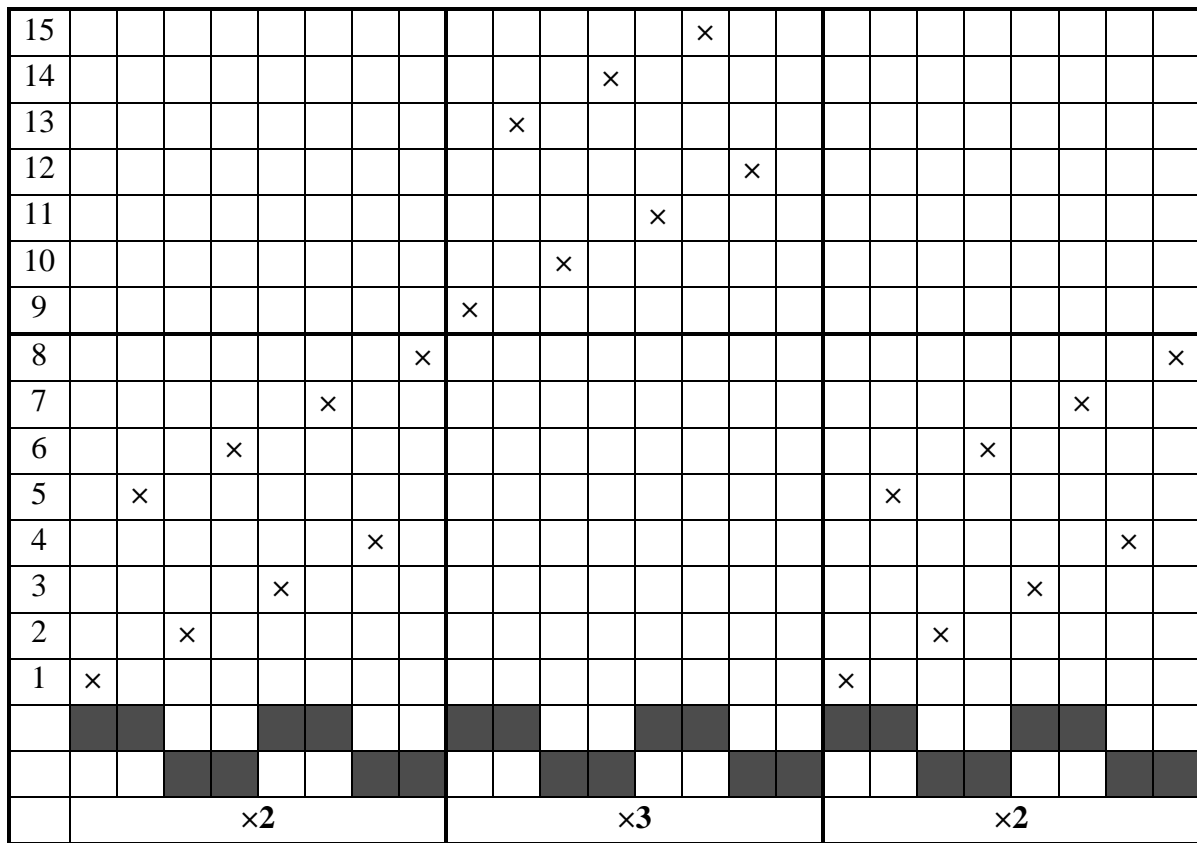


Fig. 7 Draft Plan of plain and twill 2/2 weave, total number of ends is 56.

(a) plain weave (fabric sett in weft direction:  $24 = 12 \text{ picks/layer} \times 2$ )

/	/	/	/	√	√			x	x						P
	x		x					/	/	/	/	√	√		R
/	/	/	/	√	√			x	x						P
x		x						/	/	/	/	√	√		R
/	/	/	/		√	√			x	x					P
	x		x					/	/	/	/	√	√		R
/	/	/	/	√	√			x	x						P
x		x						/	/	/	/	√	√		R

(b) 2/2 Twill weave (fabric sett in weft direction:  $36 = 18 \text{ picks/layer} \times 2$ )

/	/	/	/	√	√			x	x							P
		x	x					/	/	/	/		√	√		R
/	/	/	/		√	√			x	x						P
	x	x						/	/	/	/	√	√			R
/	/	/	/		√	√			x	x						P
x	x							/	/	/	/	√	√			R
/	/	/	/	√	√			x	x							P
x		x						/	/	/	/	√	√			R

(c) 4 ends weft sateen(fabric sett in weft direction:  $44 = 22 \text{ picks/layer} \times 2$ )

/	/	/	/		√				×							P
		×						/	/	/	/			√		R
/	/	/	/	√				×								P
			×					/	/	/	/			√		R
/	/	/	/			√			×							P
	×							/	/	/	/		√			R
/	/	/	/				√				×					P
×								/	/	/	/	√				R

Fig. 8 Peg plan of the three woven fabrics plain, twill and sateen.

The above three design plans were practised on a Texel manual floor loom, as shown in Fig. 9.

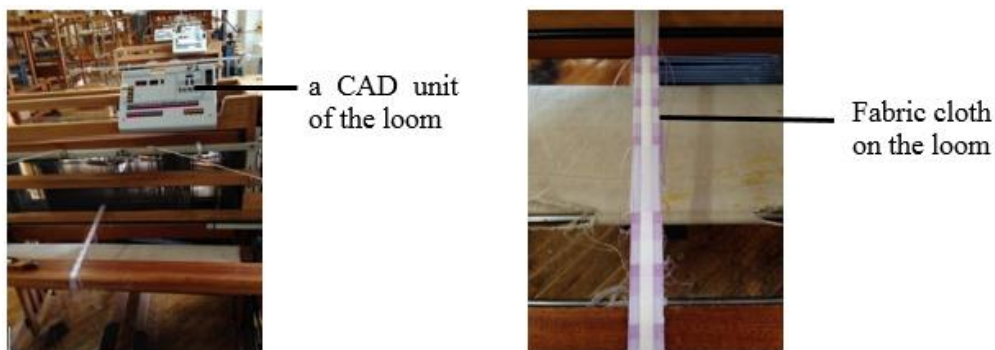


Fig. 9 Weave loom, photochromic cloth on the loom.

Three prototypes of the photochromic watchband were made using the three types of two layer woven fabrics. Fig. 10 presents watchband made of two-layer plain weave structure. All designs have different appearance between indoor and outdoor due to the colour change of the photochromic yarn in the watchband. The middle section of the watchband appears creamy and white coloured indoor, and changes to light pink – dark outdoor exposed to a low (Fig. 10) and medium level of UV intensities. The light pink colour is close to the low UV index reference colour. Therefore, the photochromic watch band can be used to indicate the real time UV index level to alarm the wearer.



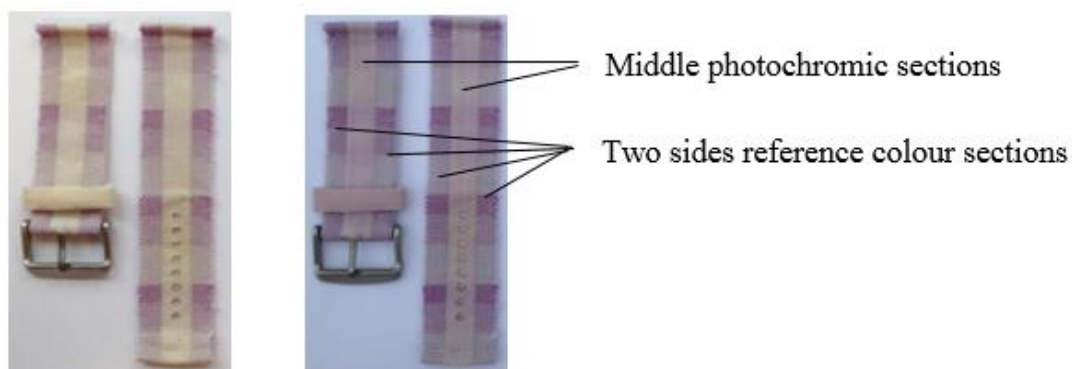


Fig. 10 photochromic watchband made of plain weave cloth, indoor and outdoor UVI: (left) indoor and (right) outdoor with UVI 0.06.

#### 4. Conclusions

The principle and techniques of engineering design two layer woven fabrics for UV warning textile applications have been studied and the following conclusions have been made.

- The colour effect of a type of photochromic fabric in different strength of sunlight corresponding to different UVI levels. Based on the colour obtained three yarns with three static colours were identified to be used as reference colours for comparison to the colour when the chromic yarn exposed in the sunlight.
- Three two-layer narrow woven fabrics were developed for UV indexable watchbands using the photochromic yarn and the three reference yarns based on the pre-determined colour effects in different sections of the fabrics (watchbands) available for users to know the UVI level by comparing the colour of the chromic section and the reference colours. The developed techniques could be used for developing fabrics for other textile products and applications.

#### 5. References

- Bamfield, P. (2001). Chromic phenomena, technological applications of colour chemistry. Cambridge: The royal.
- Birge, R. R., Gillespie, N. B., Izaguirre, E. W., Kusnetzow, A., Lawrence, A. F., Singh, D., et al. (1999). Biomolecular electronics: protein-based associative processors and volumetric memories. *The Journal of Physical Chemistry A*, 103, 10746-10766.
- Cicogna, F., Ingrosso, G., Lodato, F., Marchetti, F., & Zandomenighi, M. (2004). 9-anthroylacetone and its photodimer. *Tetrahedron*, 60, 11959-11968.
- Crano, J. C., & Guglielmetti, R. J. (1999). Organic photochromic and thermochromic compounds, Vol 1: Main photochromic families. New York: Plenum press.

Feister, U., Laschewski, G., & Grewe, R. D. (2011). UV index forecasts and measurements of health-effective radiation. *Journal of photochemistry and photobiology B: biology*, 102, 55-68.

Gerhardt, G. E., & Township, W. (1973). Patent No. 3725292. United State.

Krutmann, J., Diepgen, T. L., Luger, T. A., Grabbe, S., Meffert, H., Sonnichsen, N., et al. (1998). High-dose UVAI therapy for atopic dermatitis: results of a multicenter trial. *Journal of the American academy of dermatology*, 38 (4), 589-593.

Kuhn, D., Balli, H., & Steiner, U. E. (1991). Kinetic study of the photodecoloration mechanism of an inversely photochromic class of compounds forming spiropyran analogues. *Journal of photochemistry and photobiology A: Chemistry*, 61 (1), 99-112.

Liu, R. S., & Hammond, G. S. (2003). Photochemical reactivity of polyenes, from dienes to rhodopsin, from microseconds to femtoseconds. *Photochemical & Photobiological Sciences*, 2, 835-844.

Lucas, R., McMicael, T., Smith, w., & Armstrong, B. (2006). Solar ultraviolet radiation: global burden of disease from solar ultraviolet radiation. World health organization 2006, environmental burden of disease series, No. 13.

Mancheva, I., Zhivkov, I., & Nespurek, S. (2005). Kinetics of the photochromic reaction in a polymer containing azobenzene groups. *Journal of Optoelectronics and Advanced Materials*, 7, 253-256.

McKinlay, A. F., & Diffey, B. L. (1987). A reference action spectrum for ultraviolet induced erythema in human skin. *CIE journal*, 6, 17.

Meena, S. S., Das, S., & Pramanik, A. (2017). Zinc oxide functionalized human hair: a potential water decontaminating agent. *Journal of colloid interface science*, 462, 307-314.

Paneva, D., Virovska, D., Manolova, N., Rashkov, I., & Karashanova, D. (2016). Photocatalytic self-cleaning poly(l-lactide) materials based on a hybrid between nanosized zinc oxide and expanded graphite or fullerene. *Materials Science and Engineering*, 60, 184-194.

Ross, E. (2005). Optical treatments for acne. *Dematologic therapy*, 18 (3), 253-266.

Thi, V. H., & Lee, B. K. (2017). Development of multifunctional self-cleaning and UV blocking cotton fabric with modification of photoactive ZnO coating via microwave method. *Journal of Photochemistry and photobiology A: Chemistry*, 338, 13-22.

Tjioe, M., Gerritsen, M. J., Juhlin, I., & van de Kerkhof, P. (2002). Treatment of vitiligo vulgaris with narrow band UVB (311nm) for one year and the effect of additon of folic acid and vitamin B12. *Acta dermato-venereologica*, 82 (5), 369-372.

Xin, J. H., Daoud, W. A., & Zhang, Y. H. (2005). Surface functionalization of cellulose fibers with titanium dioxide nanoparticles and their combined bactericidal activities. *Surface sciences*, 599, 69-75.