



Heriot-Watt University
Research Gateway

Influence of heat transfer on thermal stress development in solid oxide fuel cells

Citation for published version:

Kalib, NS, Muchtar, A, Somalu, MR, Ihsan, AKAM, Aman, NAMN & Mah, JCW 2019, 'Influence of heat transfer on thermal stress development in solid oxide fuel cells: A review', *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol. 54, no. 2, pp. 175-184.
<http://www.akademiabaru.com/doc/ARFMTSV54_N2_P175_184.pdf>

Link:

[Link to publication record in Heriot-Watt Research Portal](#)

Document Version:

Publisher's PDF, also known as Version of record

Published In:


Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact open.access@hw.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



Influence of Heat Transfer on Thermal Stress Development in Solid Oxide Fuel Cells: A Review

Open
Access

Noor Shieela Kalib^{1,2}, Andanastuti Muchtar^{1,3,*}, Mahendra Rao Somalu¹, Ahmad Kamal Ariffin Mohd Ihsan⁴, Nurul Ashikin Mohd Nazrul Aman¹, Joelle Chia Wen Mah¹

¹ Fuel Cell Institute, Universiti Kebangsaan Malaysia, 43600 UKM Bangi, Selangor, Malaysia

² School of Engineering & Physical Science-Mechanical, Heriot-Watt University, 62200 Putrajaya, Malaysia

³ Centre for Materials Engineering and Smart Manufacturing, Faculty of Engineering and Built Environment, Universiti Kebangsaan Malaysia, 43600 UKM Bangi, Selangor, Malaysia

⁴ Centre for Integrated Design for Advanced Mechanical System, Faculty of Engineering and Built Environment, Universiti Kebangsaan Malaysia, 43600 UKM Bangi, Selangor, Malaysia

ARTICLE INFO

ABSTRACT

Article history:

Received 12 October 2018

Received in revised form 3 December 2018

Accepted 5 January 2019

Available online 12 February 2019

Solid oxide fuel cells (SOFCs) directly convert chemical energy into electrical power with minimal carbon emission. However, maintaining consistently stable electrical power generation can be challenging for SOFCs that operate at high temperatures ranging from 600°C–1000°C. Furthermore, the rigid SOFC assembly stack is prone to the development of thermal stress that leads to mechanical deformation, which subsequently shortens the lifetime of the SOFC system. Hence, identifying a uniform temperature gradient across the stack can minimize the thermal stress distribution across the stack and help prolong the service life of an SOFC system. This paper discusses the source of generated heat, the heat transfer mechanism, and their relation with the temperature gradient and thermal stress distribution.

Keywords:

SOFC, thermal stress, heat transfer, temperature gradient

Copyright © 2019 PENERBIT AKADEMIA BARU - All rights reserved

1. Introduction

Increasing awareness of today's environmental diseases, such as the effects of greenhouse gas, climate change, and pollution, enhanced the initiatives towards cleaner power generation technologies. Unlike the conventional combustion-based power generation technologies, fuel cells directly convert chemical energy into electrical power without undergoing the combustion process [1-5]. Among the different types of fuel cells, solid oxide fuel cells (SOFCs) exhibiting excellent fuel flexibility, efficiency, and power reliability have great potential to be used as a power generation technology in the future. Disturbance in power supply could lead to energy instability in the grid system, which causes immeasurable losses to the end users, particularly those in the industrial sectors [6-8]. Hence, in meeting the electricity demand, maintaining a stable power output is inevitable.

*Corresponding author.

E-mail address: muchtar@ukm.edu.my (Andanastuti Muchtar)

An SOFC stack, which is sealed to prevent the leakage of fuel/oxidant gases [9,10] and assembled using a rivet and bolt, is a promising power generation for meeting the electricity demand of today. SOFC stacks generate a higher power output at a higher efficiency when it is operated at high temperature (600°C–1000°C) [11-14], due to ionic conductivity characteristic in the electrolyte. However, given that thermal stress is developed when a rigid body undergoes mechanical deformation due to the variation of temperature, SOFC stacks are susceptible to the development of thermal stresses, particularly at the sealant. A strong relation between thermal expansion coefficient TEC mismatch [15-19] and temperature gradient [20-25] on thermal stress development has been widely reported. A careful selection of the cell components material at the design stage is essential as non-uniform temperature gradients induce excessive thermal stress on those components with incompatible (TEC). Thermal stress in an SOFC stack leads to mechanical instability and defects, such as deformation, creep, and cracks. [26,27], which in turn, increase the probability of structural failure. The following discussions focus on factors that influence temperature gradient, as well as the relation between temperature gradient and heat transfer in SOFC.

1.1 Temperature Gradient in SOFC

The temperature gradient is generally defined as the variation of temperature concerning the distance in the direction of the heat flow. The heat flow, temperature distribution, and temperature gradient of an SOFC stack are indirectly influenced by the uniformity of gas flow distribution from the inlet towards the outlet. The fuel and oxidant gases are channeled through the interconnects between the electrodes in different flow orientations. Figure 1 illustrates two widely studied flow orientations in SOFC; namely parallel-flow orientation and counter-flow orientation. Each of these orientations has their heat transfer characteristics, in terms of temperature distributions and temperature gradients. These attributes are influenced by the heat accumulated when the fuel/oxidant is supplied through the gas flow channels. In a counter-flow orientation, in which fuel and oxidant gases flow in opposite directions, a more uniform temperature distribution can be obtained than that in a parallel-flow orientation. In a parallel-flow orientation, in which fuel and oxidant gases flow in the same direction, the temperature increases as the flow distance increases, and a higher temperature is observed at the outlet than at the inlet regardless of which boundary condition is adopted [28-31].

In the work of Stygar *et al.*, [32], the effects of geometrical changes on the heat transfer rate were investigated using computational fluid dynamics (CFD) on an SOFC of the mono-block-layer build type. Temperature distribution in this study was determined on the basis of the reaction between heat supplied to the system and fuel mass flow rate. The results showed that the temperature distribution of the counter-flow orientation is more uniform than that of the co-flow orientation at constant inlet temperature and fuel mass flow rate. Meanwhile, Reza *et al.*, [33] conducted a CFD analysis under the assumption that the temperature distribution is emanated from the endothermic reaction. In this study, the partial differential equations for the three-dimensional (3D) model were derived on the basis of mass, energy, momentum, and ionic conservation laws. The results showed better uniformity in the current density distribution of the counter-flow orientations than that in the current density distribution of the parallel-flow orientations because of the higher temperature gradient steepness at the parallel-flow orientations. Therefore, the counter-flow orientation that produces uniform temperature distribution is preferred.

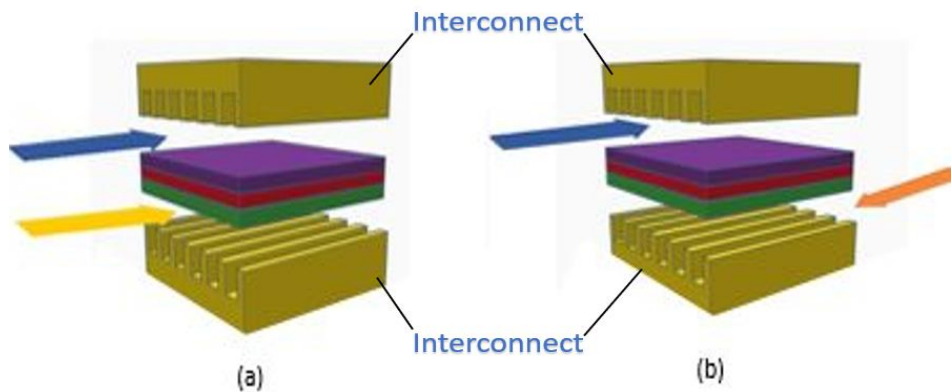


Fig. 1. Schematic of the SOFC gas flow orientation: (a) parallel flow and (b) counterflow

Uniform temperature distribution in counter-flow especially, reduces the thermal stress distribution with the steepness of the temperature gradient is lessened compared to the parallel-flow orientation. Given that the power output of the cell is closely related to the temperature-dependent ionic conductivity, unsteady temperature distribution in the stack, particularly that between the contact surface of the electrodes and interconnection, results in unstable ionic conductivity and hence unstable power output [34-37]. In addition, Choudhary *et al.*, [38] established a relationship between thermal stress and temperature gradient. The results showed that the stress distribution across SOFC component decreases when fuel and oxidant gases undergo a preheating process before being supplied into the stack. Therefore, minimizing the steepness of the temperature gradient, which considerably influences the rate of thermal stress distribution in SOFC stacks, is essential to ensure consistent endothermic reaction and effective output performance.

1.2 Heat Transfer in SOFCs

In SOFC applications, the heat source can generally be classified into two: external heat supply and internal heat generation. Basically, heat can be transferred through three mechanisms: conductive, convective, and radiation. Given that radiative heat transfer, which occurs between the fuel/oxidant and gas flow channels at the interconnects, does not influence the temperature gradient in SOFCs [39], the radiative heat transfer has not been considered in establishing the temperature gradient in SOFCs. On the other hand, conductive and convective are mapped to external heat supply and carrying energy, which is derived from a fuel and oxidant supply into the SOFC stack. This process is illustrated in Figure 2.

Internal heat generation refers to heat generated from the electrochemical and chemical reaction, such as concentration polarisation, activation polarisation and ohmic polarisation which has been studied in earlier works [40-42]. In their works, the heat from concentration and activation polarisations were ignored. The results showed that the amount of heat emitted from the endothermic reaction is small. Meanwhile, the heat generated by the Joule effect is due to the ion transfer across the electrode owing to the conduction of the oxygen ion. More on the Joule effect will be discussed in Section 4 of this paper.

The effectiveness of heat transfer is closely related to the consistency of temperature distribution, which can be maintained by minimizing the steepness of the temperature gradient. Recent studies have focused on the effects of temperature distribution and heat transfer in SOFC

[43-49]. It is believed that by incorporating the heat pipe in SOFC, this will enhance the rate of heat transfer, thereby reducing the steepness of the temperature gradient across the stack and increasing the cell performance.

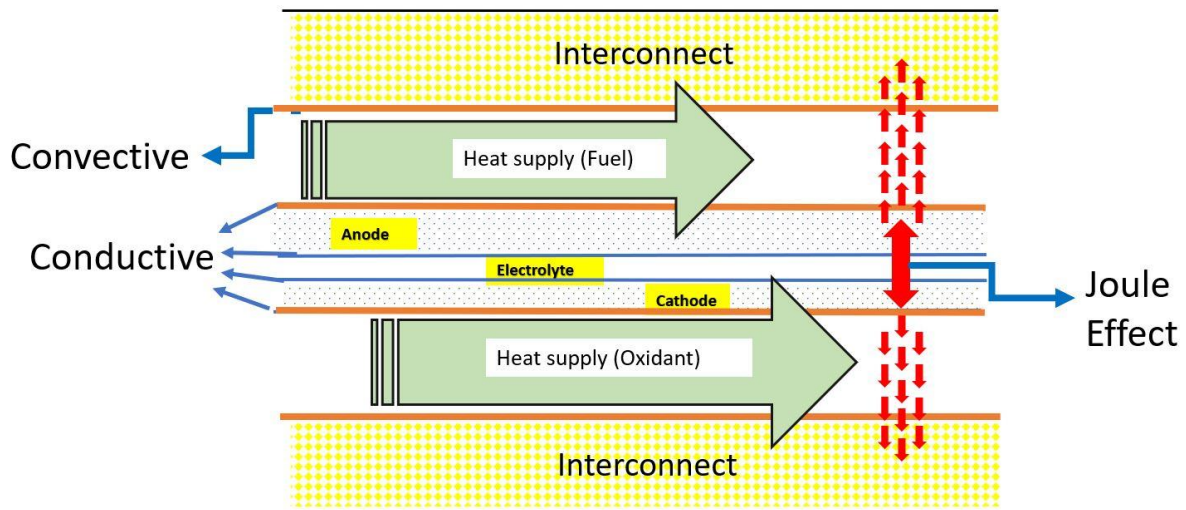


Fig. 2. Schematic of the heat transfer in SOFCs along the x-direction (side view)

Recently, a reduction of the temperature gradient of 50% in SOFC was observed by Dillig *et al.*, [50] where the CFD was used for validation purposes. The temperature differences between the SOFC components were reduced when the rate of heat extracted from the SOFC stack is increased; leading to an improvement of thermal efficiency (16%). Similarly, Zeng *et al.*, [51] applied the same approach to evaluate the correlation between heat transfer and temperature gradient. The finding by Zeng *et al.*, [51] is in agreement with the previous study by Dillig *et al.*, [50]. Further observation was performed on the cross-section of the cell to assess the development of micro-cracks. Typically, micro-cracks are prone to develop as the large temperature gradient causes a detrimental impact upon the cell. The above -mentioned work reveals more advantages in assessing the aspects of effectiveness and accuracy in the analysis, as reflected in the actual cell condition when compared to simulation, in which the parameter was solely based on assumption. The influence of the temperature gradient on heat transfer, particularly in the SOFC application, is discussed further in the next section.

1.3 Convective Heat Transfer

Convective heat transfer occurs when heat is transmitted from the external heat supply, particularly the fuel/oxidant (fluid), to the surface of interconnect and electrodes (solid). The convective heat transfer can be determined using Newton’s Law of Cooling as shown below

$$Q_{conv} = hA(T_s - T_F) \tag{1}$$

$$Q_{conv} = hA \left(\frac{dT}{dx} \right), \tag{2}$$

where h is the film heat transfer coefficient, A is the surface that is directly in contact with the fluid flow, T_s is the temperature at the solid surface, and T_F is the temperature of the fluid.

Eq (1) is adopted when the heat is transferred from the fluid to the solid surface. Meanwhile, Eq (2) is adopted to determine heat transfer between fluid flow and the contact surface over the length of the gas flow channels.

A work established to study the relationship among temperature distribution, temperature gradient, and cell performance efficiency by using the numerical method with convective heat transfer as the heat loss from the system has been conducted by Steilen *et al.*, [52]. Temperature distribution strongly depends on the transferred heat. Thus, the heat transfer considerably influences the voltage output, power output, and performance efficiency. Similarly, Bhattacharya *et al.*, [53] found that excessive air flow in the interconnection during fuel utilization affects the cell temperature and performance efficiency. The high rate of convective heat transfer due to fast air movement reduces the rate of electro-catalytic reactions and the ionic conductivity in the YSZ electrolyte. The studies mentioned above showed that the performance efficiency is highly dependent on the consistency of the temperature distribution, which can be maintained by minimizing the steepness of the temperature gradient. High heat transfer rate in a SOFC stack induces rapid heat extraction. The smoothness of the endothermic reaction is highly temperature dependent. Thus, excessive heat extraction from the SOFC system can jeopardize its performance efficiency. Therefore, proper temperature gradient should be considered at an early stage of designing the SOFC stack to ensure its effectiveness.

1.4 Conductive Heat Transfer

Conductive heat transfer refers to the transmission of energy from the higher energy to the lower energy molecules within the boundaries of a solid body or crossing the boundaries within two solid bodies that come into contact with each other. In the SOFC context, conductive heat transfers through the anode–electrolyte–cathode configured single cell when the convective heat is transferred from the fuel. Figure 3 illustrates the heat and temperature gradient through the anode–electrolyte–cathode configured single cell, with the assumption that the fuel at the anode side is the only heat source. A temperature gradient of an SOFC refers to the changes of heat flow with respect to the thickness of single cell as described by Fourier's law

$$Q_{cond} = -kA \left(\frac{dT}{dx} \right), \quad (3)$$

where dt/dx is the temperature gradient crossing the thickness of SOFC component, k is the constant of thermal conductivity (W/mK), and A is the contact surface area.

Shao *et al.*, [54] investigated the effects of heat transfer and fluid flow on thermal stress distribution through crack propagation rate. They assumed that the internal heat is generated through conductive heating. The results showed that the mismatch between the SOFC component value and the variation in the temperature gradient across the stack induce the crack propagation. Different from previous works that only considered convective heat transfer as the heat dissipated from the stack, Amiri *et al.*, [55] applied a combination of conductive and convective heat transfer principles as the heat was generated in the cell through an endothermic reaction. The results showed that the generated conductive heat is substantially more significant than the convective heat because the heat capacity and thermal conductivity of gas are relatively smaller than those of solids.

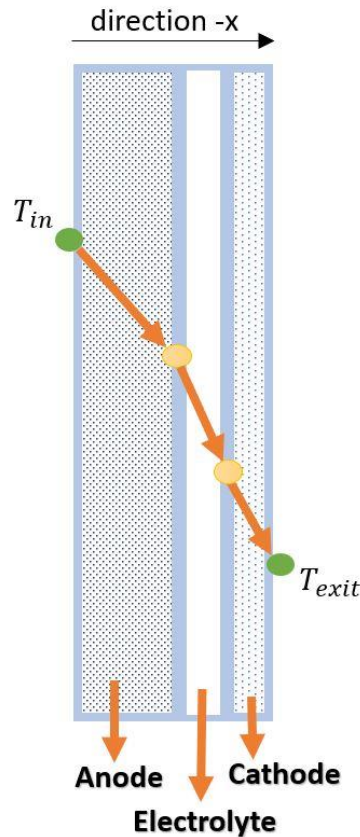


Fig. 3. Temperature gradient across the anode–electrolyte cathode configured single cell

1.5 Joule Effect

The Joule effect, also known as ohmic heating, refers to the heat generated by ohmic overpotential losses in an SOFC stack. The internal heat generated by the Joule effect radiates from the electrodes towards the interconnects (Figure 2). Given that the internal heat generated by the Joule effect is much higher than those generated by the electrochemical reaction, the ohmic losses profoundly influence the temperature distribution and range of temperature gradient steepness in the SOFCs [56].

The heat caused by the Joule effect is given as follows

$$S_{ohn} = \frac{i^2}{\sigma}, \tag{4}$$

where i is represent for current density meanwhile σ is for electrical conductivity.

Sahli *et al.*, [57] studied the effect of geometrical changes on temperature distribution by weighing only the heat generation due to ohmic heating. Based on their analysis, the highest temperature gradient variance was noted at the anode due to the significant temperature difference between electrolyte and anode. Nonetheless, the scope of this study was limited because they did not establish the relationship between current density and heat distribution rate

in the system. On the other hand, they only considered stable current density while establishing the heat source in SOFC using the Joule effect.

Razbani *et al.*, [58] simulated chemical and electrochemical processes, as well as transport phenomena, on electrolyte-supported SOFC via three-dimensional (3D) numerical analysis. With the assumption that heat source is generated from electrochemical reactions, Joule effect, and activation losses; it was discovered that current densities and cell voltages were closely linked with a temperature distribution in the cell. This work offers clarity into the subject through the revelation of ohmic resistance across the interconnect, as opposed to the frequent assumption that it is insulated. Correlation between thermal conditions and heat transfer has been probed by Lee *et al.*, [59]. Upon considering the Joule effect at high operating temperatures, the 3D modeling was applied to analyse the relationship. The outcomes portrayed that heat generated by the Joule effects flowed from the electrolyte towards either anode or cathode, whichever one with lower thermal conductivity. Therefore, the direction of the temperature gradient does depend on the materials used to design the electrodes.

Heat generated from the endothermic reaction, particularly in connection with the Joule effect, should be weighed in mainly due to its impact on temperature distribution in SOFC through heat distribution. Heat emitted from the Joule effect influences the steepness gradient and the cell performance output. Therefore, the increment in power output is evident when the working temperature is high.

2. Conclusion

The current trend in power generation technology is shifting towards clean, sustainable and renewable energy. SOFC is among the preferred choices for alternative power generation technology as they produce power output at higher efficiency and offer wide-ranging fuel flexibility choices. Given that SOFCs operate at high temperatures ranging from 600°C–1000°C, consideration of thermal stress distribution across the stack is essential to prolong the life of the system. The effects of the temperature gradient on each type of heat transfer mechanism, conductive, convective and Joule effect were discussed in this paper as the most influencing factors of thermal stress distribution in SOFCs. Identifying a suitable temperature gradient condition between the SOFC components is necessary to acquire an accurate data and to interpret the results of the analysis. To elucidate the mechanical failure that induces thermal stress, computer simulation is the most common approach applied by past researchers to analyze the prediction of thermal stress distribution. This approach is acceptable due to economical viability and ease of varying the parameter.

Acknowledgements

We gratefully acknowledge the financial support from the Universiti Kebangsaan Malaysia (UKM) under the Research University Grant No. GUP-2016-045.

References

- [1] Khadyko, Mikhail, Calin Daniel Marioara, Stephane Dumoulin, Tore Børvik, and Odd Sture Hopperstad. "Effects of heat-treatment on the plastic anisotropy of extruded aluminium alloy AA6063." *Materials Science and Engineering: A* 708 (2017): 208-221.
- [2] Baharuddin, Nurul Akidah, Andanastuti Muchtar, Mahendra Rao Somalu, MUHAMMED ALI SA, and Hamimah Abd Rahman. "INFLUENCE OF SINTERING TEMPERATURE ON THE POLARIZATION RESISTANCE OF La_{0.6}Sr_{0.4}Co_{0.2}Fe_{0.8}O_{3-δ}-SDC CARBONATE COMPOSITE CATHODE." *Ceramics-Silikáty* 60, no. 2 (2016): 115-121.
- [3] Baharuddin, Nurul Akidah, Andanastuti Muchtar, and Mahendra Rao Somalu. "Short review on cobalt-free

- cathodes for solid oxide fuel cells." *International journal of hydrogen energy* 42, no. 14 (2017): 9149-9155.
- [4] Cinti, G., G. Discepoli, E. Sisani, and U. Desideri. "SOFC operating with ammonia: stack test and system analysis." *International Journal of Hydrogen Energy* 41, no. 31 (2016): 13583-13590.
- [5] Mahmud, L. S., A. Muchtar, and M. R. Somalu. "Challenges in fabricating planar solid oxide fuel cells: a review." *Renewable and Sustainable Energy Reviews* 72 (2017): 105-116.
- [6] Zhu, Jian-hong, Wen-xia Pan, and Xiaoqiang Li. "Energy storage scheduling design on friendly grid wind power." *Sustainable Energy Technologies and Assessments* 25 (2018): 111-118.
- [7] Merino, Julia, Carlos Veganzones, Roberto Álvaro-Hermana, and Jesús Fraile-Ardanuy. "Electrical machines-based multi-disturbance device for testing distribution grid technologies." *International Journal of Electrical Power & Energy Systems* 99 (2018): 57-68.
- [8] Wang, Keyou, Chen Qi, Xin Huang, and Guojie Li. "Large disturbance stability evaluation of interconnected multi-inverter power grids with VSG model." *The Journal of Engineering* 2017, no. 13 (2017): 2483-2488.
- [9] Lin, Chih-Kuang, Yu-An Liu, Si-Han Wu, Chien-Kuo Liu, and Ruey-Yi Lee. "Joint strength of a solid oxide fuel cell glass-ceramic sealant with metallic interconnect in a reducing environment." *Journal of Power Sources* 280 (2015): 272-288.
- [10] Jiang, Wenchun, Yucai Zhang, Yun Luo, J. M. Gong, and S. T. Tu. "Creep analysis of solid oxide fuel cell with bonded compliant seal design." *Journal of Power Sources* 243 (2013): 913-918.
- [11] Anwar, M., A. Muchtar, and M. R. Somalu. "Effects of Various Co-Dopants and Carbonates on the Properties of Doped Ceria-Based Electrolytes: a Brief Review Electrolytes for SOFCs." *Int J Appl Eng Res* 11 (2016): 9921-9928.
- [12] Anwar, Mustafa, Muhammed Ali SA, Abdalla M. Abdalla, Mahendra Rao Somalu, and Andanastuti Muchtar. "Effect of sintering temperature on the microstructure and ionic conductivity of Ce." (2017).
- [13] Xenos, Dionysios P., Philipp Hofmann, Kyriakos D. Panopoulos, and Emmanuel Kakaras. "Detailed transient thermal simulation of a planar SOFC (solid oxide fuel cell) using gPROMS™." *Energy* 81 (2015): 84-102.
- [14] Lei, Libin, Zetian Tao, Tao Hong, Xiaoming Wang, and Fanglin Chen. "A highly active hybrid catalyst modified (La 0.60 Sr 0.40) 0.95 Co 0.20 Fe 0.80 O 3-δ cathode for proton conducting solid oxide fuel cells." *Journal of Power Sources* 389 (2018): 1-7.
- [15] Gao, Peipei, Amy Bolon, Manisha Taneja, Zhilin Xie, Nina Orlovskaya, and Miladin Radovic. "Thermal expansion and elastic moduli of electrolyte materials for high and intermediate temperature solid oxide fuel cell." *Solid State Ionics* 300 (2017): 1-9.
- [16] Xu, Min, Ting Shuai Li, Ming Yang, Martin Andersson, Ida Fransson, Tara Larsson, and Bengt Sundén. "Modeling of an anode supported solid oxide fuel cell focusing on thermal stresses." *International Journal of Hydrogen Energy* 41, no. 33 (2016): 14927-14940.
- [17] Molla, Tesfaye Tadesse, Kawai Kwok, and Henrik Lund Frandsen. "Transient deformational properties of high temperature alloys used in solid oxide fuel cell stacks." *Journal of Power Sources* 351 (2017): 8-16.
- [18] Jiang, Xuening, Jiao Wang, Guoqiang Jia, Zijian Qie, Yuchao Shi, Asim Idrees, Qingyu Zhang, and Lei Jiang. "Characterization of PrBaO. 92CoCuO6- δ as a potential cathode material of intermediate-temperature solid oxide fuel cell." *International Journal of Hydrogen Energy* 42, no. 9 (2017): 6281-6289.
- [19] Wei, S-S., T-H. Wang, and J-S. Wu. "Numerical modeling of interconnect flow channel design and thermal stress analysis of a planar anode-supported solid oxide fuel cell stack." *Energy* 69 (2014): 553-561.
- [20] Amiri, Amirpiran, Periasamy Vijay, Moses O. Tadó, Khaliq Ahmed, Gordon D. Ingram, Vishnu Pareek, and Ranjeet Utikar. "Planar SOFC system modelling and simulation including a 3D stack module." *International Journal of Hydrogen Energy* 41, no. 4 (2016): 2919-2930.
- [21] Xu, Min, Tingshuai Li, Ming Yang, and Martin Andersson. "Solid oxide fuel cell interconnect design optimization considering the thermal stresses." *Science bulletin* 61, no. 17 (2016): 1333-1344.
- [22] Wen, H., J. C. Ordonez, and J. V. C. Vargas. "Optimization of single SOFC structural design for maximum power." *Applied Thermal Engineering* 50, no. 1 (2013): 12-25.
- [23] Ramadhani, F., M. A. Hussain, H. Mokhlis, and S. Hajimolana. "Optimization strategies for Solid Oxide Fuel Cell (SOFC) application: A literature survey." *Renewable and Sustainable Energy Reviews* 76 (2017): 460-484.
- [24] Razbani, Omid, Ivar Wærnhus, and Mohsen Assadi. "Experimental investigation of temperature distribution over a planar solid oxide fuel cell." *Applied energy* 105 (2013): 155-160.
- [25] Duan, Liqiang, Kexin Huang, Xiaoyuan Zhang, and Yongping Yang. "Comparison study on different SOFC hybrid systems with zero-CO2 emission." *Energy* 58 (2013): 66-77.
- [26] Huang, Yingcai, Qiubao Lin, Huiying Liu, Meng Ni, and Xiuqin Zhang. "Evaluation of the waste heat and residual fuel from the solid oxide fuel cell and system power optimization." *International Journal of Heat and Mass Transfer* 115 (2017): 1166-1173.
- [27] Luo, Yun, Wenchun Jiang, Qian Zhang, W. Y. Zhang, and Muming Hao. "Effects of anode porosity on thermal stress and failure probability of planar solid oxide fuel cell with bonded compliant seal." *International Journal of*

- Hydrogen Energy* 41, no. 18 (2016): 7464-7474.
- [28] Skrzypkiewicz, Marek, Michał Wierzbicki, Jakub Kupecki, and Michał Stępień. "Selected Aspects of Design, Construction, and Operation of SOFC-Based Micro-Combined Heat and Power Systems." In *Modeling, Design, Construction, and Operation of Power Generators with Solid Oxide Fuel Cells*, pp. 205-231. Springer, Cham, 2018.
- [29] Martinez, Andrew S., Jacob Brouwer, and G. Scott Samuelsen. "Comparative analysis of SOFC-GT freight locomotive fueled by natural gas and diesel with onboard reformation." *Applied energy* 148 (2015): 421-438.
- [30] Canavar, Murat, and Yuksel Kaplan. "Effects of mesh and interconnector design on solid oxide fuel cell performance." *International Journal of Hydrogen Energy* 40, no. 24 (2015): 7829-7834.
- [31] Guo, Hang, Mao Hai Wang, Jia Xing Liu, Zhi Hua Nie, Fang Ye, and Chong Fang Ma. "Temperature distribution on anodic surface of membrane electrode assembly in proton exchange membrane fuel cell with interdigitated flow bed." *Journal of Power Sources* 273 (2015): 775-783.
- [32] Stygar, Mirosław, Tomasz Brylewski, and Mieczysław Rękas. "Effects of changes in MOLB-type SOFC cell geometry on temperature distribution and heat transfer rate in interconnects." *International Journal of Heat and Mass Transfer* 55, no. 15-16 (2012): 4421-4426.
- [33] Amedi, Hamid Reza, Bahamin Bazooyar, and Mahmoud Reza Pishvaie. "Control of anode supported SOFCs (solid oxide fuel cells): Part I. mathematical modeling and state estimation within one cell." *Energy* 90 (2015): 605-621.
- [34] Meng, Qingshan, Jitian Han, Lingjian Kong, Hai Liu, Tao Zhang, and Zeting Yu. "Thermodynamic analysis of combined power generation system based on SOFC/GT and transcritical carbon dioxide cycle." *International Journal of Hydrogen Energy* 42, no. 7 (2017): 4673-4678.
- [35] Tucker, Michael C. "Dynamic-temperature operation of metal-supported solid oxide fuel cells." *Journal of Power Sources* 395 (2018): 314-317.
- [36] Cai, Yixiao, Baoyuan Wang, Yi Wang, Chen Xia, Jinli Qiao, Peter A. van Aken, Bin Zhu, and Peter Lund. "Validating the technological feasibility of yttria-stabilized zirconia-based semiconducting-ionic composite in intermediate-temperature solid oxide fuel cells." *Journal of Power Sources* 384 (2018): 318-327.
- [37] Meng, Yuanjing, Xunying Wang, Chen Xia, Baoyuan Wang, Wenjing Dong, Yuan Ji, and Bin Zhu. "High-performance SOFC based on a novel semiconductor-ionic SrFeO_{3-δ}-CeO₂ membrane." *International Journal of Hydrogen Energy* (2018).
- [38] Choudhary, Tushar, and Mithilesh kumar Sahu. "CFD Modeling of SOFC Cogeneration System for Building Application." *Energy Procedia* 109 (2017): 361-368.
- [39] Moussa, Hocine Ben, Bariza Zitouni, Kafia Oulmi, Bouziane Mahmah, Maiouf Belhamel, and Philippe Mandin. "Hydrogen consumption and power density in a co-flow planar SOFC." *International journal of hydrogen energy* 34, no. 11 (2009): 5022-5031.
- [40] Shariatzadeh, O. Joneydi, A. H. Refahi, M. Rahmani, and S. S. Abolhassani. "Economic optimisation and thermodynamic modelling of SOFC tri-generation system fed by biogas." *Energy Conversion and Management* 105 (2015): 772-781.
- [41] Rabuni, Mohamad Fairus, Tao Li, Puvich Punmeechao, and Kang Li. "Electrode design for direct-methane micro-tubular solid oxide fuel cell (MT-SOFC)." *Journal of Power Sources* 384 (2018): 287-294.
- [42] Badur, Janusz, Marcin Lemański, Tomasz Kowalczyk, Paweł Ziółkowski, and Sebastian Kornet. "Zero-dimensional robust model of an SOFC with internal reforming for hybrid energy cycles." *Energy* (2018).
- [43] Dong, Sang-Keun, Woo-Nam Jung, Kashif Rashid, and Akiyoshi Kashimoto. "Design and numerical analysis of a planar anode-supported SOFC stack." *Renewable Energy* 94 (2016): 637-650.
- [44] Nguyen, Xuan-Vien, Chang-Tsair Chang, Guo-Bin Jung, Shih-Hung Chan, Chia-Chen Yeh, Jyun-Wei Yu, and Chi-Yuan Lee. "Improvement on the design and fabrication of planar SOFCs with anode-supported cells based on modified button cells." *Renewable Energy* 129 (2018): 806-813.
- [45] Fardadi, Mahshid, Dustin F. McLarty, and Faryar Jabbari. "Investigation of thermal control for different SOFC flow geometries." *Applied Energy* 178 (2016): 43-55.
- [46] Kupecki, Jakub, Konrad Motylinski, and Jaroslaw Milewski. "Dynamic analysis of direct internal reforming in a SOFC stack with electrolyte-supported cells using a quasi-1D model." *Applied Energy* 227 (2018): 198-205.
- [47] Ramírez-Minguela, J. J., V. H. Rangel-Hernández, J. A. Alfaro-Ayala, A. R. Uribe-Ramirez, J. M. Mendoza-Miranda, J. M. Belman-Flores, and B. Ruiz-Camacho. "Energy and entropy study of a SOFC using biogas from different sources considering internal reforming of methane." *International Journal of Heat and Mass Transfer* 120 (2018): 1044-1054.
- [48] Peksen, M. "Safe heating-up of a full scale SOFC system using 3D multiphysics modelling optimisation." *International Journal of Hydrogen Energy* 43, no. 1 (2018): 354-362.
- [49] Spallina, Vincenzo, Pasquale Nocerino, Matteo C. Romano, Martin van Sint Annaland, Stefano Campanari, and Fausto Gallucci. "Integration of solid oxide fuel cell (SOFC) and chemical looping combustion (CLC) for ultra-high efficiency power generation and CO₂ production." *International Journal of Greenhouse Gas Control* 71 (2018):

- 9-19.
- [50] Dillig, Marius, Thomas Plankenbühler, and Jürgen Karl. "Thermal effects of planar high temperature heat pipes in solid oxide cell stacks operated with internal methane reforming." *Journal of Power Sources* 373 (2018): 139-149.
- [51] Zeng, Hongyu, Yuqing Wang, Yixiang Shi, Ningsheng Cai, and Dazhong Yuan. "Highly thermal integrated heat pipe-solid oxide fuel cell." *Applied Energy* 216 (2018): 613-619.
- [52] Steilen, Mike, Costanza Saletti, Marc P. Heddrich, and K. Andreas Friedrich. "Analysis of the influence of heat transfer on the stationary operation and performance of a solid oxide fuel cell/gas turbine hybrid power plant." *Applied Energy* 211 (2018): 479-491.
- [53] Bhattacharya, Deepa, Jayanta Mukhopadhyay, Nayan Biswas, Rajendra Nath Basu, and Prasanta Kumar Das. "Performance evaluation of different bipolar plate designs of 3D planar anode-supported SOFCs." *International Journal of Heat and Mass Transfer* 123 (2018): 382-396.
- [54] Shao, Q., L. Bouhala, D. Fiorelli, M. Fahs, A. Younes, P. Núñez, S. Belouettar, and A. Makradi. "Influence of fluid flow and heat transfer on crack propagation in SOFC multi-layered like material with anisotropic porous layers." *International Journal of Solids and Structures* 78 (2016): 189-198.
- [55] Amiri, Saeid, R. E. Hayes, K. Nandakumar, and Partha Sarkar. "Modelling heat transfer for a tubular micro-solid oxide fuel cell with experimental validation." *Journal of Power Sources* 233 (2013): 190-201.
- [56] Li, Ang, Ce Song, and Zijing Lin. "A multiphysics fully coupled modeling tool for the design and operation analysis of planar solid oxide fuel cell stacks." *Applied Energy* 190 (2017): 1234-1244.
- [57] Sahli, Youcef, Bariza Zitouni, Hocine Ben Moussa, and Hafsia Abdenebi. "Three-Dimensional Numerical Study of the Heat Transfer on The Planar Solid Oxide Fuel Cell: Joules Effect." In *Progress in Clean Energy, Volume 1*, pp. 449-461. Springer, Cham, 2015.
- [58] Razbani, Omid, Mohsen Assadi, and Martin Andersson. "Three dimensional CFD modeling and experimental validation of an electrolyte supported solid oxide fuel cell fed with methane-free biogas." *international journal of hydrogen energy* 38, no. 24 (2013): 10068-10080.
- [59] Lee, Sanghyeok, Mansoo Park, Hyoungchul Kim, Kyung Joong Yoon, Ji-Won Son, Jong-Ho Lee, Byung-Kook Kim, Wonjoon Choi, and Jongsup Hong. "Thermal conditions and heat transfer characteristics of high-temperature solid oxide fuel cells investigated by three-dimensional numerical simulations." *Energy* 120 (2017): 293-305.