



Heriot-Watt University
Research Gateway

Feasibility Assessment of CO₂ Capture Retrofitted to an Existing Cement Plant

Citation for published version:

Gerbelová, H, van der Spek, M & Schakel, W 2017, 'Feasibility Assessment of CO₂ Capture Retrofitted to an Existing Cement Plant: Post-combustion vs. Oxy-fuel Combustion Technology', *Energy Procedia*, vol. 114, pp. 6141-6149. <https://doi.org/10.1016/j.egypro.2017.03.1751>

Digital Object Identifier (DOI):

[10.1016/j.egypro.2017.03.1751](https://doi.org/10.1016/j.egypro.2017.03.1751)

Link:

[Link to publication record in Heriot-Watt Research Portal](#)

Document Version:

Publisher's PDF, also known as Version of record

Published In:

Energy Procedia

General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact open.access@hw.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



13th International Conference on Greenhouse Gas Control Technologies, GHGT-13, 14-18
November 2016, Lausanne, Switzerland

Feasibility assessment of CO₂ capture retrofitted to an existing cement plant: post-combustion vs. oxy-fuel combustion technology

Hana Gerbelová^{a*}, Mijndert van der Spek^b, Wouter Schakel^b

^aIN+ Center for Innovation, Technology and Policy Research, Instituto Superior Técnico, Av. Rovisco Pais 1, 1049-001 Lisbon, Portugal

^bCopernicus Institute of Sustainable Development, Utrecht University, Heidelberglaan 2, 3584 CS Utrecht, The Netherlands

Abstract

This research presents a preliminary techno-economic evaluation of CO₂ capture integrated with a cement plant. Two capture technologies are evaluated, monoethanolamine (MEA) post-combustion CO₂ capture and oxy-fuel combustion. Both are considered potential technologies that could contribute to reduction of CO₂ emissions in the cement industry. The study compares these two technologies in terms of technical performance, investment costs, and operational costs. The case study is applied to the one of the largest cement plants in Portugal, Alhandra. The results show that the amount of CO₂ avoided using the post-combustion MEA technology is lower due to additional emissions from reboiler steam production. Moreover, the total capital investment of the post-combustion CO₂ capture system is estimated at 260 M€₂₀₁₄ and the annual operation and maintenance costs of around 43 M€₂₀₁₄; whereas the oxy-fuel combustion CO₂ capture requires a capital investment of about 217 M€₂₀₁₄ and 37 M€₂₀₁₄ annually for operation and maintenance. This indicates that the oxy-fuel CO₂ capture technology may be a better choice in terms of costs. However, this technology implies higher technical uncertainties concerning integration with the cement plant.

© 2017 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the organizing committee of GHGT-13.

Keywords: Cement plant; Post-combustion CO₂ capture; oxy-fuel combustion CO₂ capture, Techno-economic analysis.

* Corresponding author. Tel.: +351210407027; fax: +351214233598.
E-mail address: hana.gerbelova@ist.utl.pt

1. Introduction

Cement is one of the most important building materials and its production is a highly energy intensive process. Limestone calcines at temperatures between 900 and 1000 °C and kiln temperatures are kept at 1500 °C to achieve calcination [1]. To produce the heat, mostly fossil fuels are used in the combustion system, leading to large amount of anthropogenic CO₂ emissions. The amount of CO₂ produced by decomposition of limestone in the raw mix is even larger than the CO₂ from the combustion process. This ranks the cement manufacturing sector as the second most relevant industry in terms of CO₂ emissions in Portugal, following electricity production. It is responsible for approximately 13 % of CO₂ emissions in the Portuguese energy system [2].

Although the cement industry is yet to deploy a large commercial capture project, CO₂ capture could significantly reduce its CO₂ emissions. Among the three types of CO₂ capture technologies (post-, pre-, and oxy- combustion) post-combustion and oxy-fuel combustion are the most suitable methods for capturing CO₂ at cement manufacturing plant. Pre-combustion CO₂ capture is less suitable because it does not capture the significant amount of CO₂ emission from the limestone calcinations process [3].

The objective of this research is to analyze the performance of the two capture methods when integrated in the cement plant. The case study is applied to the Alhandra cement plant, which uses a dry process with a 5 stage preheater and has a production capacity of around 5000 tonne per day. The feasibility assessment quantifies performance and cost impacts of retrofitting the plant with both CO₂ capture technologies. The objective is accomplished as follows:

- Simulation of the pyro-processing unit of the cement process;
- Technical evaluation of the MEA post-combustion CO₂ capture applied to the Alhandra cement plant;
- Technical evaluation of the Alhandra cement plant using oxy-fuel combustion;
- Preliminary cost analysis of both CO₂ capture methods, post-combustion and oxy-fuel combustion, for the designed systems.

Nomenclature

AACE	Association for the Advancement of Cost Engineering
ASU	Air Separation Unit
CCS	Carbon Capture and Storage
CEPCI	Chemical Engineering Plant Cost index
CHP	Combined Heat and Power
DCC	Direct Contact Cooler
DF	Dust Filters
FGD	Flue Gas Desulphurization
IECM	Integrated Environmental Control Model
M	Millions
MEA	Monoethanolamine
O&M	Operation and Maintenance
SCR	Selective Catalytic Reduction
TCR	Total Capital Requirement

2. Methodology

2.1. Reference case study

The Alhandra cement plant is one of the largest cement plants operating in Portugal. It produces 1,8 Mt of clinker per year and started its production in 2005. The composition of the mix of fuels burned in the pyro-processing unit of the Alhandra plant is presented in Table 1, as well as the composition of the raw materials and the final clinker product.

Table 1. Summary of the main input and output streams used for the simulation of the reference case [4,5].

Input				Output			
Raw materials		Fuels		Final product		Pre-treated flue gas	
Composition		Composition		Composition		Composition	
CaCO ₃	90.28 %	Petroleum coke	77 %	Al ₂ O ₃	0,7 %	CO ₂	16.5 mol%
SiO ₂	4.8 %	Alternative fuels	15 %	C ₂ S	27,1 %	H ₂ O	13.2 mol%
Al ₂ O ₃	1.9 %	Biomass	6.6 %	C ₃ S	51,5 %	N ₂	62.4 mol%
Fe ₂ O ₃	1.61 %	Fuel oil	0.15 %	C ₃ A	9,4 %	O ₂	7.9 mol%
Others	1.3 %	Gas oil	0.5 %	C ₄ AF	2,7 %	Total flow	35720 kmol/h
Total flow	392235 kg/h	Natural gas	0.005 %	CaO	8.5 %	Temperature	128 °C
Temperature	25 °C	Total flow	25600 kg/h	Total flow	230570 kg/h		
		Temperature	25 °C	Temperature	50 °C		

The pyro-processing unit of the cement process was simulated in AspenPlus [6]. The process flow diagram includes a 5-stage preheater, a calciner, a kiln and a clinker cooler. Its simplified layout is shown in Fig. 1. Streams into the system are raw material, fuel inlet into the calciner and kiln and air for combustion and cooling. Streams that go out are the produced clinker and exhaust gases. The simulation was optimized in such manner that out-coming flows were in agreement with actual data from the Alhandra plant.

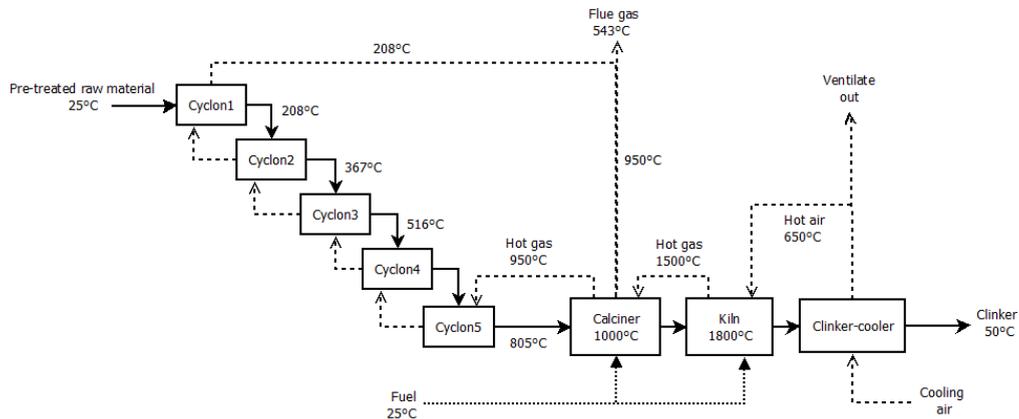


Fig. 1. Simplified diagram of the simulated reference cement plant.

2.2. Post-combustion CO₂ capture

Post-combustion systems separate CO₂ from the exhaust gases of the system by adding an additional unit to the tail-end of the clinker process where the CO₂ is separated from other combustion flue gases. The amine systems are currently the closest to commercial application and therefore are considered as the most mature technology to be applied on existing plants. The flue gases coming from the combustion process and the calcination reaction were considered as inlets into the MEA post-combustion unit. Unlike many coal power plants, cement plants are generally not equipped with SO₂ and NO_x controls. Therefore, dust filter bags, FGD, and SCR facilities need to be additionally installed to avoid unnecessary solvent degradation. It is assumed that the pretreated flue gas entering the CO₂ capture process consists primarily of CO₂, H₂O, N₂ and O₂ (Table 1). Fig. 2 shows the simplified flowsheet of the simulated CO₂ capture unit. It was simulated using ProTreat software [7].

Table 2. Prices used for the cost estimates.

Parameter	Unit	Value*	Source
Activated carbon	€/tonne	1282	[17]
Caustic soda	€/tonne	331.6	[17]
Limestone	€/tonne	50.86	[17]
Lime	€/tonne	260.5	[17]
Sorbent	€/tonne	1951	[18]
Reclaimer waste disposal CO ₂ capture	€/tonne	192.8	[18]
Water	€/m ³	1.547	[19]
Natural gas	€/GJ	13.04	[20]
Electricity	€/kWh	0.1802	[21]
Labour	€/h	11	[22]
FGD stacking	€/tonne	6.358	[18]
FGD waste disposal	€/tonne	10.9	[18]
NO _x catalyst	€/m ³	4515	[18]
Amonnia	€/tonne	113	[18]
Fabric dust filter bag	€/ks	97.16	[18]
Waste disposal dust filter	€/tonne	14.16	[18]
Misceallenous chemicals for CPU	€/tonneCO ₂	0.76	[18]

*when necessary, currency conversion is applied.

3. Results and discussion

Table 3 presents the required modifications, CO₂ emissions balance, and the energy consumption when post-combustion CO₂ capture or oxy-fuel combustion is applied to the cement plant.

Table 3. Technical performance of the post-combustion and oxy-fuel combustion CO₂ capture process.

Parameter	Unit	MEA post-combustion CO ₂ capture	Oxy-fuel combustion CO ₂ capture
Modification to the reference plant		No	Kiln burner, two-stage clinker-cooler, sealing
Additional units installed to the reference plant		DF, SCR, FGD, DCC, CO ₂ capture unit, compressor, CHP	ASU, DCC, CPU, CO ₂ recycle, DCC, DF, fan, compressor
CO ₂ capture rate	%	67.2	87.1
CO ₂ in the flue gas	tonne/h	186.9	Total 459.2
	tonne/h	-	To recycle 273.2
	tonne/h	-	To CPU 186
CO ₂ captured	tonne/h	161.9	161.9
CO ₂ stack out	tonne/h	Total 61.26	24.06
	tonne/h	Primary stack 18.7	-
	tonne/h	CHP stack 42.56	-
Additional heat requirement	GJ/h	681.8	0
Electricity consumption	MW	9.56	30.93

The table shows that the amount of CO₂ captured is similar for the MEA and the oxy-fuel combustion case. However, under the MEA post-combustion option, a large amount of CO₂ emissions is caused by the additional CHP

(23 % of the total CO₂ emissions in the flue gas), which is vented to the atmosphere. Thus, oxy-fuel CO₂ capture has a larger direct CO₂ emission reduction potential, while producing the same amount of clinker as the reference plant. However, this figure only includes direct emissions, also including potential CO₂ emissions of electricity production might shift the balance away from oxy-fuel.

For the MEA case, the CO₂ emission reduction comes at the expense of 682 GJ/h of additional heat for solvent regeneration. In terms of electricity, the largest consumer is the CO₂ compressor. The oxy-fuel combustion process has higher consumption of electricity than the MEA case due to requirements from ASU and CPU.

Table 4 summarizes the direct capital and O&M costs of the designed CO₂ capture processes. The largest capital requirement for the post-combustion CO₂ capture process comes from the columns and the compression unit. Under the oxy-fuel combustion, the highest investments include the ASU and CPU (which includes the CO₂ compression), accounting for 68 % of the total investment costs. The cost estimates of the oxy-fuel configuration include an estimation of required modifications to the reference plant, such as adjustments to the burner and proper sealing to avoid air leakage.

In both configurations, the main operating costs are connected to the consumption of electricity. For the post-combustion CO₂ capture, the additional natural gas to the CHP also presents an important share of the O&M costs. Like the investment costs, the O&M costs of the oxy-fuel option are lower than those of the MEA option. This study hence suggests that also from an economic perspective oxy-fuel combustion may be preferable over MEA capture.

Table 4. Cost estimates of the post-combustion and oxy-fuel combustion CO₂ capture systems.

MEA post-combustion CO ₂ capture		Oxy-fuel combustion CO ₂ capture	
Capital investment	M€ ₂₀₁₄		M€ ₂₀₁₄
<i>Pretreatment of flue gases</i>		<i>Pretreatment of flue gases</i>	
Dust filters	10.12	Dust filters	10.54
Selective catalytic reduction	6.58	<i>Additional units</i>	
Flue gas desulphurization	45.4	Air separation unit	54.39
<i>CO₂ capture process area</i>		Flue gas recycle fan	1.08
Flash	10.52	Recycle flue gas pipeline	5.73
CO ₂ absorber vessel	32.02	Flue gas cooler	14.61
Heat exchanger	1.95	Cryogenic purification unit	45.14
Sorbent circulation pumps	5.85	<i>Modification to the reference cement plant</i>	
Sorbent regenerator	21.48	Kiln burner	10.72
Reboiler	10.5	Two stage clinker cooler	3
Cooler of recycle	7.06	Sealing	0.07
Sorbent reclaiming	0.41	<i>CO₂ system process facilities capital</i>	
Sorbent processing	0.7	Engineering cost	10.71
<i>Additional heat supply</i>		General facilities capital	14.53
Auxiliary gas boiler	11.22	Project contingency cost	21.79
<i>Post-treatment of CO₂</i>		Process contingency cost	7.26
Drying and compression unit	21.67	Interest charges	10.31
<i>CO₂ system process facilities capital</i>		Royalty fees	7.26
General facilities capital	22.62	<i>Total capital requirement</i>	
Project contingency cost	15.83		216.6
Process contingency cost	33.93		
Interest charges	11.31		
Royalty fees	1.31		
<i>Total capital requirement</i>	260.25		

O&M costs	M€ ₂₀₁₄ /year		M€ ₂₀₁₄ /year
Variable	35.3	Variable	30.28
Fixed	8.03	Fixed	6.9
Total	43.33	Total	37.18

4. Conclusions

This work presented a preliminary techno-economic assessment of CO₂ capture from a cement plant using A) MEA post-combustion technology with additional steam production in a NG boiler and B) oxy-fuel combustion technology. The results indicate that the oxy-fuel option is capable of achieving higher removal rates of the cement plants' direct CO₂ emissions (87 % versus 67 % for MEA). This is mainly due to the additional emissions of steam production which is required for the MEA post-combustion CO₂ capture unit, and the exclusion of secondary emissions from electricity use, which benefits the oxy-fuel case. Also from an economic perspective, the studied oxy-fuel configuration presents the lowest investment and operational costs. The TCR of the MEA and oxy-fuel case are 260 and 216 M€, respectively. The operational costs are 43 and 37 M€/a. The techno-economic results thus point towards oxy-fuel combustion as the preferable option for the studied cement plant. A drawback of the oxy-fuel case is that it requires more adaptations to the core clinker production process, increasing uncertainties in process performance and product quality. Post-combustion CO₂ capture could be readily implemented and may therefore be an easier option for retrofitting in the short term.

Acknowledgments

The authors would like to specially thank to Eng. Carlos Oliveira for the technical support and Dr. Andrea Ramírez for valuable comments on this paper. This work was supported under the individual fellowship SFRH/BPD/95177/2013 funded by the Fundação para a Ciência e a Tecnologia (FCT), Portugal.

References

- [1] Sousa Coutinho A. Cimentos: Fabrico e propriedades do betão. Lisbon, Portugal: LNEC 2 vols; 1998. p. 130-147.
- [2] Portuguese Environmental Agency. Portuguese National Inventory Report on Greenhouse Gases, 1990 - 2013 Submitted Under the United Nations Framework. Amadora, Portugal; 2015.
- [3] IEAGHG. Deployment of CCS in the cement industry. 2013/19, December 2013.
- [4] CIMPOR. Declaração ambiental atualizada 2013: Centro de produção de Alhandra. Lisbon 2013.
- [5] CIMPOR. Personal communication: May 2012, September 2016.
- [6] AspenTech. Aspen Plus. <http://www.aspentech.com/products/engineering/aspens-plus>.
- [7] Optimized Gas Treating Inc. ProTreat Simulation Package. <http://www.ogtrt.com/protreat>.
- [8] Chakma A, Mehrotra AK, Nielsen B. Comparison of chemical solvents for mitigating CO₂ emissions from coal-fired power plants. Heat Recovery Systems & CHP 1995;15:231-40.
- [9] Alie C, Backham L, Croiset E, Douglas PL. Simulation of CO₂ capture using MEA scrubbing: a flowsheet decomposition method. Energy Conversion and Management 2005;46:475-87.
- [10] Wrampe P, Rolseth HC. The effect of oxygen upon the rotary kiln's production and fuel efficiency: Theory and practice. IEEE Industry Application Society. 1976;6:568-73.
- [11] Doctor RD, Molburg JC, Mendelsonh MH, Brockmeier NF. CO₂ capture for PC-boilers using oxy-fuels: A transition strategy. Greenhouse Gas Control Technologies 2005;7:1205-10.
- [12] Stadler KS, Poland J, Gallestey E. Model predictive control of a rotary cement kiln. Control engineering Practise 2011;19:1-9.
- [13] Towler G., Sinnott.RK. Chemical engineering design: Principles, practice and economics of plant and process design. 2nd ed. Elsevier Ltd. 1973.
- [14] Rao AB. Details of a technical, economic and environmental assessment of amine-based CO₂ capture technology for power plant greenhouse gas control. U.S. Department of Energy. Contract N(DE-FC26-00NT40935). 2002.
- [15] Rubin ES, Rao AB, Berkenpas MB. Technical Documentation: Oxygen-based combustion systems (oxyfuels) with carbon capture and storage (CCS). U.S. Department of Energy. Contract N (DE-AC21-92MC29094). 2007.
- [16] HIS Chemical. Chemical plant database. Specially compiled for the needs of the Joint Research Center. 2014.

- [17] LNEC. Technical Report: Costs in construction realization. Lisbon, Portugal. 2008.
- [18] IECM Development Team. IECM. Pittsburgh, PA, USA: <http://www.cmu.edu/epp/iecm/index.html>.
- [19] EPAL. Preços de venda da água em Lisboa. 2014. <http://www.epal.pt/EPAL/menu/clientes/tarif%C3%A1rio/%C3%A1gua>
- [20] DGEG. Oil, natural gas and coal: Quick statistics. 2014. Lisbon, Portugal: www.dgge.pt.
- [21] ERSE. Tarifas reguladas em 2014.
http://www.erse.pt/pt/electricidade/tarifaseprecos/tarifasreguladasdeanosanteriores/2014/Documents/PrecosAcesso_2014.pdf
- [22] Eurostat. Wages and Labor costs. 2014.