



Heriot-Watt University
Research Gateway

Comparative Environmental Life Cycle Assessment of Oxyfuel and Post-combustion Capture with MEA and AMP/PZ - Case Studies from the EDDiCCUT Project

Citation for published version:

Oreggioni, GD, Singh, B, Hung, C, van der Spek, MW, Skagestad, R, Eldrup, NH, Ramírez, A & Strømman, AH 2017, 'Comparative Environmental Life Cycle Assessment of Oxyfuel and Post-combustion Capture with MEA and AMP/PZ - Case Studies from the EDDiCCUT Project', *Energy Procedia*, vol. 114, pp. 6604-6611. <https://doi.org/10.1016/j.egypro.2017.03.1814>

Digital Object Identifier (DOI):

[10.1016/j.egypro.2017.03.1814](https://doi.org/10.1016/j.egypro.2017.03.1814)

Link:

[Link to publication record in Heriot-Watt Research Portal](#)

Document Version:

Publisher's PDF, also known as Version of record

Published In:

Energy Procedia

Publisher Rights Statement:

© 2017 Published by Elsevier Ltd.

General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact open.access@hw.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



13th International Conference on Greenhouse Gas Control Technologies, GHGT-13, 14-18
November 2016, Lausanne, Switzerland

Comparative environmental life cycle assessment of oxyfuel and post-combustion capture with MEA and AMP/PZ - Case studies from the EDDiCCUT project

Gabriel D. Oreggioni^a, Bhawna Singh^a, Christine Hung^a, Mijndert W. van der Spek^b,
Ragnhild Skagestad^c, Nils Henrik Eldrup^c, Andrea Ramirez^b, Anders Hammer Strømman^{a,*}

^aIndustrial Ecology Programme and Department of Energy and Process Engineering, Norwegian University of Science and Technology, Trondheim-7491, Norway.

^bCopernicus Institute of Sustainable Development, Utrecht University, Utrecht, Netherlands

^cTel-Tek, Porsgrunn-3918, Norway

Abstract

This work presents the results of a comparative life cycle assessment study for three CCS technologies applied to a coal-fired power plant: post-combustion capture with MEA, post combustion capture with AMP/PZ and cryogenic oxy-fuel. This study has been performed in the context of the EDDiCCUT project, which aims to develop an environmental due diligence framework for assessing novel CCUS technologies. The research shows that there are no significant differences in climate change potential (CCP) for the technologies under study. In the three cases the reduction is about 70% (70% for the plant with MEA, 71% for the plant with AMP-PZ, and 73% for the plant with oxy-fuel technology). With regard to other impacts (e.g., acidification, toxicity, resource depletion) the results show an increase in the impacts as consequence of CCS, mostly driven by the increase amount of feedstock per kWh. Contrary to CCS, there are clear differences among the technologies with results ranging between 20 and 30%. Toxicity impacts related to the operation of the solvent-based carbon capture unit were also considered; however, it was observed that their contribution was only around 2% of the total impact for human toxicity potential. Rather, the largest contributor to human toxicity impacts in the life cycle of coal power plants with and without CCS is coal mining waste disposal.

© 2017 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the organizing committee of GHGT-13.

* Corresponding author. Tel.: +47 73598948

E-mail address: anders.hammer.stromman@ntnu.no

Keywords: Life cycle assessment, MEA, AMP/PZ, oxy-fuel, environmental due diligence

1. Introduction

The energy sector accounts for about 32% of global CO₂ emissions, as a consequence of fossil fuel combustion for power generation [1]. The deployment of carbon capture and storage technologies in energy and large industrial CO₂ emitting sources is therefore crucial to meet climate stabilisation targets [2]. CO₂ utilisation as a feedstock to produce fuels, polymers and other valuable chemicals is also gaining attention [3, 4]. The high energy consumption associated with conventional monoethanolamine (MEA) solvent-based capture technologies has led the search for less energy intensive CO₂ capture processes [5]. A large portfolio of CCS technologies is currently under research [6]. Several authors have made efforts to assess the performance of novel solvents for post-combustion capture or novel process configurations [7,8,9]. Studies have also focused on different technologies such as oxy-fuel combustion [10,11], adsorbent-based separations [12,13], membranes [14,15] and other novel separation processes with low technological readiness levels (TRL). Results of these studies are often difficult to compare due to differences in focus, system boundaries, processes, etc.

As considerable investments in CCS are forecasted to take place in the coming years [2], it is necessary to develop a methodological framework that enables a fair comparison of the different technologies in order to select those that will be scaled up and commercially developed. This comparison should not only be based on techno-economic performance indicators, but also consider the life cycle environmental performance of the investigated technologies. However, the analysis of the potential environmental benefits and trade-offs throughout the life cycle of CCS technologies is often based on different techno-economic parameter assumptions and system boundaries, which causes in a large variation within reported results. Analyses also seldom consider the most novel CCS options. As a response to these challenges, the Environmental Due Diligence for Carbon Capture and Utilisation Technologies (EDDiCCUT) project [16, 17] aims to assess the technical, economic and environmental performance of novel carbon capture and utilisation technologies in an integrated, systematic and harmonized way. Special attention is made to identify and understand the knowledge gaps for these novel options.

In this paper, we present the results of applying the EDDiCCUT framework to a comparative life cycle assessment for carbon capture technologies deploy to coal-fired power plants. Three technologies are considered: a conventional MEA post-combustion process; an absorptive post-combustion unit employing a blend of aminomethyl propanol with piperazine as separation agent (AMP/PZ), and a cryogenic oxy-fuel combustion plant. Previous articles devoted to evaluating the environmental performance of CCS technologies have mostly focused on post-combustion MEA processes [18, 19]. Fewer LCA studies for oxy-technologies can be found in literature [20] and to our knowledge, no previous works have analysed environmental impacts for the incorporation of blended solvent-based post-combustion units. It is important to underline that the comparison presented in this paper has been undertaken systematically, i.e., the same system boundaries and the same background databases are used, as well as detailed process and cost estimations [21,22] for the foreground processes within the power and CO₂ capture island.

This article consists of four sections, including this introduction. The method section briefly describes the environmental due diligence (EDD) framework, with particular focus placed on the development of the life cycle inventory. The results section presents the life cycle results for the stressors and impacts under study in this work. The conclusion section highlights the main findings of this study, their relevance and the role of the conducted research in the development of the EDD framework.

2. Methodology

2.1 EDD framework

The EDD framework provides a strategy for the integrated technical, economic and environmental assessment for a given technology. **Figure 1** presents the four main phases of the EDD framework. During the scoping phase, the design basis and the system boundaries are defined based on a comprehensive literature review that includes technical, economic and environmental data collection for the technology under study and the different processes that are part

of the value chain. The quality of the knowledge base in the state of the art literature is assessed by using specially developed pedigree matrices [23]. Considering the knowledge available and its quality, the modelling strategy for the different disciplines (technology, costs, environmental) is defined. Furthermore, the performance indicators for each discipline are defined (e.g., energy efficiency, LCOE, CCP).

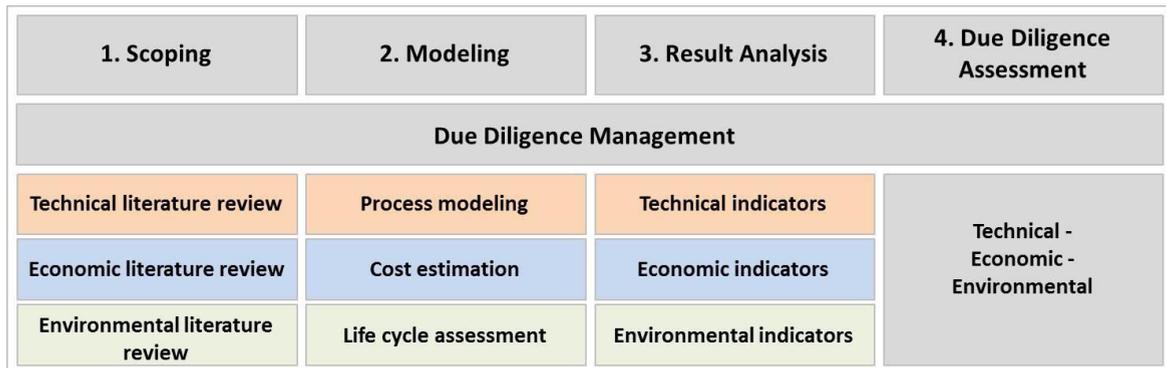


Figure 1: Schematic approach used in the EDDiCCUT framework

During the modelling phase (Phase 2), technical, economic and environmental modelling is carried out. Process simulations and cost estimations cover the power plant and the CO₂ capture unit. The environmental assessment comprises the inventory development and impact quantification for the whole value chain. The inventory makes use of process data and cost data from the technological and economic assessments in a hybrid lifecycle assessment approach. When necessary, data from conventional process-based life cycle inventory databases are used to complement the information from technical and economic disciplines and to model other processes of the value chain. Phase 3 involves the evaluation and analysis of the performance indicators that have been scoped for analysis. Process and stressor influence for the indicators is analyzed and understood. In phase 4, the performance indicators are reviewed and filtered using relevance (which are defined by the team and by other involved parties in the study) and quality criteria. A more detailed description of the employed framework can be found in a previous publication [17].

2.2 Case study description

As mentioned in the introduction, in this study the life cycle impacts associated with MEA, AMP/PZ and oxy-fuel carbon capture processes are analyzed. **Table 1** displays the main technical and economic performance indicators as well as other relevant information for the plants under consideration.

The processes that are part of the full value chain were combined in ten (10) interconnected system areas containing similar processes (**Figure 2**). System Area (SA) 1 represents coal mining operations. SA 2 comprises the supply chains of materials required for operation. These materials consist mainly of chemicals such as NH₃ for the deNO_x unit, solvent production and other substances. SA 3 includes coal transport from the original production site to the power plant site (in this case Rotterdam, NL). Intermediate storage is also included in this SA. Energy and material requirements for utilities are considered in SA 4. Power plant and flue gas treatment processes (deNO_x, deSO_x) are included in SA5 and SA6, respectively. CO₂ capture units are considered in SA7 while CO₂ compression, CO₂ transport and CO₂ storage related processes are grouped in SA8, SA9 and SA10 respectively. For the oxy-fuel case, O₂ production via a cryogenic air separation unit replaces the carbon capture unit in SA7. CO₂ purification processes are considered in SA8 in the oxy-fuel case.

Table 1. Case studies under study in this article. The efficiency and CAPEX are the result of the technical and economic modeling in Phase2.

	REF	MEA	AMP/PZ	OXYFUEL
Plant type	Advanced supercritical	Advanced supercritical with MEA post-combustion	Advanced supercritical with AMP/PZ post-combustion	Advanced supercritical with cryogenic oxy-fuel
Location	Northern Europe (Rotterdam)	Northern Europe (Rotterdam)	Northern Europe (Rotterdam)	Northern Europe (Rotterdam)
Temporal	2014	2014	2014	2014
Current technology maturity	TRL 9	TRL 7	TRL 6	TRL 6
Lifetime (years)	40	40	40	40
Capacity (MW)	800	800	800	800
Power plant efficiency (%)[†]	46.1	36.2	37.2	37.9
CAPEX (M€)	1094	1417	1438	1609

System Area - 1 Coal mining	System Area - 3 Coal transport and storage	System Area - 5 Power generation	System Area - 7 CO₂ capture (O₂ production for oxy-fuel)	System Area - 9 CO₂ transport
System Area - 2 Production of Process Chemicals - eg. limestone, chemicals	System Area - 4 Utilities	System Area - 6 Flue gas treatment	System Area - 8 CO₂ compression (compression and CO₂ purification for oxy-fuel)	System Area - 10 CO₂ storage

Figure 2: System area layout

2.3 LCA methodology

Inventories for the operation phase of power island and CO₂ capture units (SA5, SA6, SA7 and SA8) are mainly modelled using the outputs of the technical and economical simulation carried out as part of Phase 2 in the framework [21,22]. The technical assessment provided key performance indicators such as efficiency, water use, SPECA, CO₂ avoided, CO₂ per kWh, and several air pollutant emissions such as SO_x and NO_x. Literature data from LCA databases [24] are also used for completing the emission dataset. Solvent degradation emissions for MEA are based on articles that report measurements from the Mongstad Technology Centre [25]. Several sources were used for determining degradation species and rates for the AMP/PZ-based carbon capture units [26, 27, 28]. The other systems areas were modelled by adapting data from the *ecoinvent 2.2* database [24]. The fuel value chain is modelled based on a representative coal mix suggested by the utility companies participating in the EDDiCCUT project. Mining, local and international transport as well as intermediate storage are all modelled in the fuel value chain. The inventory for CO₂ transport was developed by scaling data reported in *Ecoinvent* for natural gas transport network. CO₂ storage was assumed to take place offshore and its inventory was modelled using the data for the construction of natural gas

[†] Electrical efficiency and CAPEX for the different plants are reported in [21 and 22] where a detailed modeling description can be found.

production wells from *Ecoinvent*. Inventories for the required on-site infrastructure were developed using an hybrid approach. Hybrid life cycle combines economic and process data to develop inventories with good detail and completeness and can improve LCA modelling as conventional LCA comprises a high resolution in foreground processes but suffer from incomplete system boundaries. For a more detailed description of hybrid LCA see [29].

Life cycle impacts were estimated using the ReCiPe 1.08 characterisation method [30]. Given the concern regarding toxicity impacts from solvent degradation emissions and the lack of human and eco-toxicity characterisation factors for these species in ReCiPe, these characterisation factors were modelled using the USEtox software [31] and data reported in literature [32].

3. Results

Figure 3 shows life cycle stressors and indicators per kWh_e. It displays the relative contribution of system areas for the different technologies. In terms of stressors, results are shown for CO₂, NO_x, SO_x and PM emissions. Life cycle impacts include the following categories, climate change potential (CCP); terrestrial acidification potential (TAP); particulate matter formation (PMFP); fresh water (FEP) and marine eutrophication potential (MEP), and human toxicity potential (HTP).

In this study, the coal power plant without CCS (reference) has a CCP of about 850 g CO₂-eq/kWh_e. Deployment of CCS results in reduction in CCS of about 70% for the three technologies (70% for the plant with the MEA-based carbon capture process, 71% for the plant with AMP/PZ and by 73% for the plant with oxy-fuel technology). CCP is largely determined by CO₂ emissions, which comprise 96% of the total life cycle impact throughout the whole value chain. Life cycle reductions are lower the CO₂ capture targeted in the capture technology (90%) due to the increased emissions upstream which are driven by the decrease in efficiency in the power plant. Furthermore, the CCS plants require extra infrastructure and the separation agent value chains, which are additional sources of CO₂ not present in the reference plant.

Besides CO₂, implementing carbon capture units also enables a reduction in (on-site) SO_x (99% for MEA, 74% for AMP/PZ and 99% for oxy-fuel) and PM emissions (-64% for MEA, -62% for AMP/PZ and -99% for oxy-fuel) in the power plant. This is due to additional cleaning process (direct contact coolers) and co-capture effects in the case of solvent-based units. It must be noted, however, that both solvents have different levels of co-capture, particularly for SO_x. Despite the reductions in power plant direct emissions, life cycle increases of NO_x (+29% for MEA and +25% for AMP/PZ), SO_x (+4% for MEA and 6% for AMP/PZ) and PM (+24% for MEA and 20% for AMP/PZ) emissions are observed for the plants with solvent-based carbon capture units. These increases are a consequence of the higher coal demand required to maintain the same power output. Coal transport (liquid fuel combustion for transoceanic freight) accounts for 70% and 60% of life cycle SO_x and PM emissions, respectively. Higher direct and life cycle NO_x emissions are observed for these plants due to the fact that higher combustion and upstream process emissions can not be offset by the co-capture reduction. Lower on-site emissions are reported for these three stressors for the plant with installed oxy-fuel technology (-85% for NO_x, -99% for both SO_x and PM) due to their removal in the CO₂ purification processes. As the oxy-fuel plant has higher efficiency than power plants with solvent-based capture, the reductions in direct NO_x and SO_x emissions also result in lower life cycle emissions.

Increases of 20 and 13% for terrestrial acidification potential (TAP) are reported for the plants with installed MEA and AMP/PZ respectively, while a slight decrease is observed for the plant with oxy-fuel. TAP is mainly determined by SO_x (53%), NO_x (40%) and NH₃ (6%) emissions; the higher life cycle values for this indicator are therefore related to the increased emissions of these stressors in the value chain of the plants with solvent carbon capture processes.

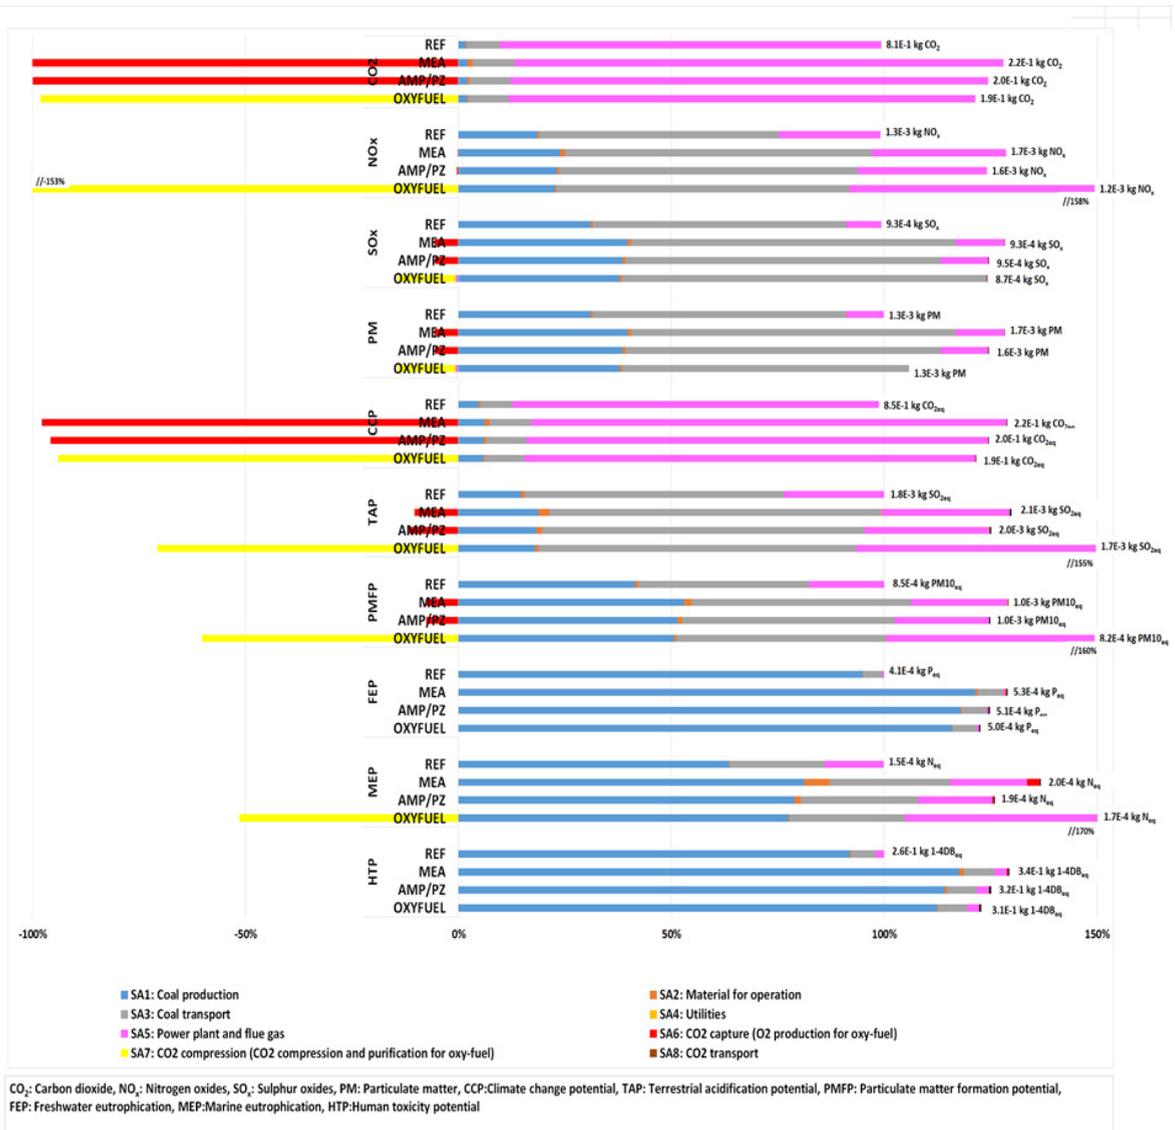


Figure 3: Life cycle stressors and indicators per kWh_e for the technologies under study

Increases of 29, 25, and 23% are reported for life cycle fresh water eutrophication (FEP) values in the plants with MEA, AMP/PZ and oxy-fuel, respectively. Coal production is the largest contributor to this indicator and it largely results from the impacts associated with phosphate-rich spoils from coal mining.

Higher marine eutrophication (MEP) impacts are also reported in the three cases under study relative to the reference plant (+ 37 % for MEA, +26% for AMP/PZ and 13% for oxy-fuel). Coal production accounts for a large share of the life cycle impact for MEP. This is a consequence of the surface landfill disposal of nitrate-rich spoil from coal mining. Coal transport contributes to 22% of the total MEP impacts due to NO_x and SO_x emissions from fuel combustion from international freight. Direct NO_x emissions are responsible for this impact in the power plant. The incorporation of solvent-based carbon capture units slightly reduces NO_x emissions but leads to higher nitrogen-containing effluents resulting from the disposal of the reclaimers, solvent degradation emissions (mainly NH₃) and infrastructure-related impacts. Lower increases are observed for the oxy fuel case due to lower NO_x and SO_x direct

emissions and higher plant efficiency (less fuel to be used) in comparison with plants with solvent based carbon capture units

The three technologies show an increase in human toxicity potential (+29% for MEA, +25% for AMP/PZ and 23% for oxy-fuel) relative to the reference plant. HTP is mainly determined by the coal value chain in particular the disposal of coal mining waste. Plants with installed solvent based carbon capture units exhibit a larger increase than the plant with oxy-fuel technology due to differences in efficiency, to the impacts from the operation of the carbon capture unit and to the human toxicity potential associated with the solvent value chain (approximately 3% of the life cycle value for this indicator for both solvent types). Direct emissions to air associated with solvent degradation emissions account for approximately 0.6% of life cycle HTP for the plant with installed MEA and AMP/PZ carbon capture units.

Conclusion

In this paper, results from a comparative life cycle assessment for three different carbon capture technologies are presented. This study was conducted as a part of the EDDiCCUT project, which aims to develop a methodological framework for the performance of environmental due diligence of carbon capture and utilization technologies. By using this framework, the technological, economic and environmental assessments are conducted systematically, employing the same system boundaries and accounting for uncertainty. This framework therefore makes it possible to consistently analyze and compare different carbon capture and utilization technologies. In this study only results of the LCA are discussed.

The EDDiCCUT methodology framework was applied to conduct a comparative assessment of three carbon capture technologies. Results of the environmental life cycle study show that the introduction of carbon capture technologies enables a drastic decrease of CCP (-70% for MEA, -71% for AMP/PZ and -73% for oxy-fuel) for the plants under consideration, allowing as well reductions in on-site direct NO_x, SO_x and PM direct emissions. However, as a result of the higher coal demand required to maintain the same power outputs, increases were observed for most of the life cycle impacts considered in this study. The plant with oxy-fuel technology presents the lowest impact results for the analyzed mid-point indicators, which is mostly due to its higher efficiency. Toxicity impacts related to the operation of the solvent-based carbon capture unit were also considered; however, it was observed that their contribution was only around 2% of the total impact for human toxicity potential. Rather, the largest contributor to human toxicity impacts in the life cycle of coal power plants with and without CCS is coal mining waste disposal.

This comparison has improved the assessment methodology framework under development, which is planned to be used as a decision-making tool for further deployment of technologies currently under research.

Acknowledgements

The authors thank the EDDiCCUT project funding consortium for their financial support, and Karsten Riedl and Ödön Jonas Majoros at Uniper for their valuable comments and expert reviews throughout the development for the case studies which results are presented in this article.

Reference

- [1] EDGAR-HTAP: a Harmonized Gridded Air Pollution Emission Dataset Based on National Inventories. Ispra (Italy): European Commission Publications Office; 2012. JRC68434, EUR report No EUR 25 299 - 2012, ISBN 978-92-79-23122-0, ISSN 1831-9424.
- [2] IEA. Energy Technology Prospective; 2015
- [3] IEA. CCS 2014. What lies in store for CCS?; 2014
- [4] SETIS. Carbon Capture Utilisation and Storage. European Commission's Directorate General for Research and Innovation; 2016.
- [5] IPCC. Special Report on Carbon Dioxide Capture and Storage; 2005.
- [6] Kuramochi T, Ramirez A, Turkenburg W, faaij A. Comparative assessment of CO₂ capture technologies for carbon intensive industrial processes. *Prog. Energy. Combust. Sci.* 2012; 38:87-112.
- [7] Ahn H, Luberti M, Liu Z, Brandani S. Process configuration studies of the amine capture process for coal-fired power plants. *Int. J. Greenh. Gas. Con.* 2013;16:29-40.

- [8] Manzolini G, Sanchez Fernandez E, Rezvani S, Macchi E, Goetheer E L V, Vlught T J H. Economic assessment of novel amine based CO₂ capture technologies integrated in power plants based on European Benchmarking Task Force methodology. *Applied Energy*. 2015;138: 546-558.
- [9] Sanchez Fernandez E, Goetheer E LV, Manzolini G, Macchi E, Reznavi S, Vlught T J H. Thermodynamics assessment of amine based CO₂ capture technologies in power plants based on European Benchmarking Task Force methodology. *Fuels*. 2014;129:318-329.
- [10] Rezvani S, Huang Y, McIlveen-Wright D, Hewitt N, Wang Y. Comparative assessment of sub-critical versus advanced super-critical oxyfuel fired PF boilers with CO₂ sequestration facilities. *Fuel*, 2007; 86:2134-2143.
- [11] NETL. Pulverized Coal Oxy-combustion Plant. 2007.
- [12] Oreggioni G., Brandani S., Luberti M, Baykan Y., Friedrich D, Ahn H. CO₂ Capture from Syngas by an Adsorption Process at a Biomass Gasification CHP Plant: Its Comparison with Amine-based CO₂ Capture. *Int. J. Greenh. Gas. Con.* 2015; 35 :71-81.
- [13] Riboldi L, Bolland O. Evaluating Pressure Swing Adsorption as a CO₂ separation technique in coal-fired power plants. *Int. J. Greenh. Gas. Con.* 2015; 39:1-16.
- [14] Bocciardo D, Ferrari M, Brandani S. Modelling and Multi-stage Design of Membrane Processes Applied to Carbon Capture in Coal-fired Power Plants. *Energy Procedia*. 2013; 37:932-940.
- [15] Merkel T., Lin H, Wei X, Baker R. Power plant post-combustion carbon dioxide capture: An opportunity for membranes. *J. Membr. Sci.* 2010; 359: 126-139.
- [16] EDDiCCUT website: <http://www.eddiccut.com/>
- [17] Singh B, Reijers R, Van der Spek M, Schakel W, Skagestad R, Askel Haugen H, Ramirez A, Eldrup N H, Hertwich E G, Strømman A H. Environmental Due Diligence of CO₂ capture and Utilization Technologies- Framework and application. *Energy Procedia*. 2014;63: p7429-7436.
- [18] Kornneef J, Van Keulen T, Faaij A, Turkenburg W. Life cycle assessment of a pulverized coal power plant with post-combustion capture, transport and storage of CO₂. *Int. J. Greenh. Gas. Con.* 2008;2: 448-467.
- [19] Singh B, Strømman A H, Hertwich E. Life cycle assessment of natural gas combined cycle power plant with post-combustion carbon capture, transport and storage. *Energy Procedia*. 2011;5: 457-466.
- [20] Singh B, Strømman A H, Hertwich E G. Comparative life cycle environmental assessment of CCS technologies. *Int. J. Greenh. Gas. Con.* 2011;5: 911-921.
- [21] Van der Spek M, Arendsen R, Ramirez A, Faaij A. Model development and process simulation of postcombustion carbon capture technology with aqueous AMP/PZ solvent. *Int. J. Greenh. Gas. Con.* 2016;47:176-199.
- [22] Van der Spek M, Eldrup N H, Skagestad R, Ramirez A. Techno-economic performance of state of the art, highly integrated oxyfuel technology for low CO₂ coal fired electricity production. *Energy Procedia*, 2016.
- [23] Klopogge P, van der Sluijs JP, Petersen AC. A method for the analysis of assumptions in model-based environmental assessments. *Environ. Model. Softw.* 2011;26:289-301.
- [24] Ecoinvent Centre. Ecoinvent data v2.2. Swiss Centre for Life Cycle Inventories. 2010. www.ecoinvent.ch.
- [25] Morken A K, Nenseter B, Pedersen S, Chhaganlal M, Feste J K, Tyborgnes R B, Ullestad Ø, Ulvatn H, Zhu L, Mikoviny T, Wisthaler A, Cents T, Bade O M, Knudsen J, Keoijer G, Pedersen O F, Hamborg E S. Emission Results of Amine Plant Operations from MEA Testing at the CO₂ Technology Centre Mongstad. *Energy Procedia*. 2014;63: 6023-6038.
- [26] Dai N, Shah A D, Hu L, Plewa M J, McKague B, Mitch W A. Measurement of Nitrosamine and Nitramine Formation from NO_x Reactions with Amines during Amine-Based Carbon Dioxide Capture for Postcombustion Carbon Sequestration. *Environ. Sci. Technol.* 2012;46: 9793-9801
- [27] Bougie F, Iliuta MC. Stability aqueous amine solutions to thermal and oxidative degradation in the absence and presence of CO₂. *Int. J. Greenh. Gas. Con.* 2014;29:16-21.
- [28] Wang T, Jens K J. Oxidative degradation of aqueous PZ solution and AMP/PZ blends for post combustion carbon dioxide capture. *CO₂ Int. J. Greenh. Gas. Con.* 2014;24:98-105
- [29] Hendrickson C T, Lave L B, Matthews H S. Assessment of Goods and Services: An Input-Output Approach. *Resources for the Future*. 2006.
- [30] ReCiPe Mid/end point method, version 1.08. 2012.
- [31] Rosenbaum R K, Bachmann T M, Gold L S, Huijbregts M A J, Jolliet O, Juraske R, Köhler A, Larsen H F, MacLeod M, Margni M, McKone T E, Payet J, Schuhmacher M, van de Meent D, Hauschild M Z. USEtox - The UNEP-SETAC toxicity model: recommended characterisation factors for human toxicity and freshwater ecotoxicity in Life Cycle Impact Assessment. *International Journal of Life Cycle Assessment*. 2008.
- [32] Veltman K, Singh B, Hertwich E G. Human and environmental impact assessment of postcombustion CO₂ capture focusing on emissions from amine-based scrubbing solvents to air. *Env. Sci. Tec.* 2010; 44:1496-502