



Heriot-Watt University
Research Gateway

Relaxing the Capillary Equilibrium Constraint for Automated Contact Angle Measurement of X-ray Micro-Tomography Images in Porous Media

Citation for published version:

Shahrokhi, O, Jahanbakhsh, A & Maroto-Valer, MM 2020, Relaxing the Capillary Equilibrium Constraint for Automated Contact Angle Measurement of X-ray Micro-Tomography Images in Porous Media. in *InterPore 2020 (online conference)*. InterPore2020, Qingdao, China, 31/08/20.

Link:

[Link to publication record in Heriot-Watt Research Portal](#)

Published In:


InterPore 2020 (online conference)

General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact open.access@hw.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.

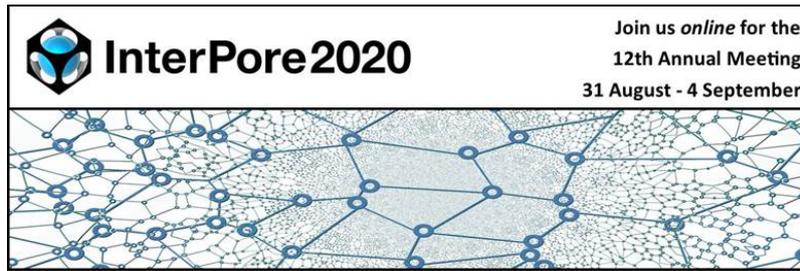

Abstract ID : 1260

Relaxing the Capillary Equilibrium Constraint for Automated Contact Angle Measurement of Time-Resolved X-ray Micro-Tomography Images in Porous Media

Content

The advances in pore-scale imaging in the past decade have enabled routine imaging of multiphase flow in porous media. This has allowed in-depth studies of governing multiphase flow mechanisms at the pore-scale. However, most of these studies are performed on static images of fluid/fluid interfaces in porous media due to ease of access to smaller X-ray flux sources available in lab-based systems. More recently, high-quality time-resolved data acquired by high flux X-ray synchrotron imaging [1,2] has enabled the micro-scale study of non-equilibrium fluid invasion events that are more directly relevant to fluid dynamics [3]. The present work focuses on improving dynamic contact angle measurements by relaxing the capillary equilibrium constraint (constant fluid/fluid interface curvature) required by existing automated contact angle measurement methods [4,5] to infer the actual location of the three-phase contact line.

We present a method for automated contact angle measurements along three-phase (solid/wetting/nonwetting phase) contact lines that can output separate contact lines for each specific ganglia. The method extracts the contact surfaces between phases from segmented images by employing the Delaunay refinement method [6] for surface mesh generation. The method by default respects the boundaries and does not split them with triangle facets, and thus preventing the method from moving the contact lines during surface generation from voxels. This allowed us to relax the constraint of constant curvature of the fluid/fluid interface (at capillary equilibrium) that is required by other available methods to infer the actual location of the three-phase contact line [4,5]. This can potentially allow more accurate measurement of dynamic contact angle measurements or experiments where the time scale is likely too short to establish full capillary equilibrium [7,8]. Depending on the parameters of the methods (facet size, facet distance and cell size), minimal smoothing could be introduced into the method while maintaining the integrity of observed features (general guidelines are advised based on image resolution of the size of features of interest). Moreover, extra Gaussian smoothing of the solid or fluid/fluid interface or the contact line is not required for this method. The three-phase contact line is defined as the set of vertices common to the surface of all phases. At these vertices, the normal vectors of the solid surface (\vec{a}) and the fluid/fluid interface (\vec{b}) are calculated. The contact angle (the angle between tangent planes to the solid surface and fluid/fluid interfaces) in each vertex is then calculated from equation 1:

$$\theta = \cos^{-1} \frac{\vec{a} \cdot \vec{b}}{|\vec{a}| |\vec{b}|} \quad (1)$$

The algorithm is then validated using synthetic images of an idealized geometry (sphere of non-wetting phase) that is intersected at known angles with a solid plane [9]. Furthermore, we employ the method to provide dynamic contact angle distribution for each separate contact lines of selected ganglia in time-resolved synchrotron data [8] and verify the measurements by manual contact angle measurements.

References

- [1] S. Schlüter, S. Berg, M. Rücker, R.T. Armstrong, H.-J. Vogel, R. Hilfer, D. Wildenschild, Pore-scale displacement mechanisms as a source of hysteresis for two-phase flow in porous media, *Water Resour. Res.* 52 (2016) 2194–2205. <https://doi.org/10.1002/2015WR018254>.

- [2] K. Singh, H. Menke, M. Andrew, C. Rau, B. Bijeljic, M.J. Blunt, Time-resolved synchrotron X-ray microtomography datasets of drainage and imbibition in carbonate rocks, *Sci. Data*. 5 (2018) 180265.
- [3] A. Mascini, V. Cnudde, T. Bultreys, Event-based contact angle measurements inside porous media using time-resolved micro-computed tomography, *J. Colloid Interface Sci.* 572 (2020) 354–363. <https://doi.org/10.1016/J.JCIS.2020.03.099>.
- [4] A. Scanziani, K. Singh, M.J. Blunt, A. Guadagnini, Automatic method for estimation of in situ effective contact angle from X-ray micro tomography images of two-phase flow in porous media, *J. Colloid Interface Sci.* 496 (2017) 51–59. <https://doi.org/10.1016/j.jcis.2017.02.005>.
- [5] A. AlRatrou, A.Q. Raeini, B. Bijeljic, M.J. Blunt, Automatic measurement of contact angle in pore-space images, *Adv. Water Resour.* 109 (2017) 158–169. <https://doi.org/10.1016/j.advwatres.2017.07.018>.
- [6] J. Ruppert, A Delaunay Refinement Algorithm for Quality 2-Dimensional Mesh Generation, *J. Algorithms*. 18 (1995) 548–585. <https://doi.org/https://doi.org/10.1006/jagm.1995.1021>.
- [7] R.T. Armstrong, S. Berg, Interfacial velocities and capillary pressure gradients during Haines jumps, *Phys. Rev. E*. 88 (2013) 43010. <https://doi.org/10.1103/PhysRevE.88.043010>.
- [8] S. Schlüter, S. Berg, T. Li, H.-J. Vogel, D. Wildenschild, Time scales of relaxation dynamics during transient conditions in two-phase flow, *Water Resour. Res.* 53 (2017) 4709–4724. <https://doi.org/10.1002/2016WR019815>.
- [9] K.A. Klise, D. Moriarty, H. Yoon, Z. Karpyn, Automated contact angle estimation for three-dimensional X-ray microtomography data, *Adv. Water Resour.* 95 (2016) 152–160. <https://doi.org/10.1016/j.advwatres.2015.11.006>.

Acceptance of Terms and Conditions

[Click here to agree](#)

Newsletter

Primary authors: SHAHROKHI, Omid (Heriot-Watt University); JAHANBAKHSI, Amir (Heriot-Watt University); Prof. MAROTO-VALER, M. Mercedes (Research Centre for Carbon Solutions (RCCS), School of Engineering and Physical Sciences, Heriot-Watt University, UK)

Presenter: SHAHROKHI, Omid (Heriot-Watt University)

Track Classification: MS 10 - (MS10) Advances in imaging porous media: techniques, software and case studies

Contribution Type: Pre-Recorded Oral Presentation

Comments:

Acknowledgements This project has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (MILEPOST, Grant agreement no.: 695070). This paper reflects only the authors' view and ERC is not responsible for any use that may be made of the information it contains.

Submitted by **Dr SHAHROKHI, Omid** on **Thursday 25 June 2020**