



Heriot-Watt University
Research Gateway

An overview of current status of carbon dioxide capture and storage technologies

Citation for published version:

Leung, DYC, Caramanna, G & Maroto-Valer, MM 2014, 'An overview of current status of carbon dioxide capture and storage technologies', *Renewable and Sustainable Energy Reviews*, vol. 39, pp. 426-443. <https://doi.org/10.1016/j.rser.2014.07.093>

Digital Object Identifier (DOI):

[10.1016/j.rser.2014.07.093](https://doi.org/10.1016/j.rser.2014.07.093)

Link:

[Link to publication record in Heriot-Watt Research Portal](#)

Document Version:

Publisher's PDF, also known as Version of record

Published In:

Renewable and Sustainable Energy Reviews

Publisher Rights Statement:

Creative Commons by Attribution

General rights

Copyright for the publications made accessible via Heriot-Watt Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy


Heriot-Watt University has made every reasonable effort to ensure that the content in Heriot-Watt Research Portal complies with UK legislation. If you believe that the public display of this file breaches copyright please contact open.access@hw.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



ELSEVIER

Contents lists available at ScienceDirect

Renewable and Sustainable Energy Reviews

journal homepage: www.elsevier.com/locate/rser

An overview of current status of carbon dioxide capture and storage technologies

Dennis Y.C. Leung^{a,*}, Giorgio Caramanna^b, M. Mercedes Maroto-Valer^b^a Department of Mechanical Engineering, The University of Hong Kong, Hong Kong^b Centre for Innovation in Carbon Capture and Storage, Heriot-Watt University, UK

ARTICLE INFO

Article history:

Received 20 January 2014

Received in revised form

27 May 2014

Accepted 7 July 2014

Keywords:

Post-combustion

Pre-combustion

Oxyfuel combustion

CO₂ separation

Transport

Geological storage

Leakage and monitoring

ABSTRACT

Global warming and climate change concerns have triggered global efforts to reduce the concentration of atmospheric carbon dioxide (CO₂). Carbon dioxide capture and storage (CCS) is considered a crucial strategy for meeting CO₂ emission reduction targets. In this paper, various aspects of CCS are reviewed and discussed including the state of the art technologies for CO₂ capture, separation, transport, storage, leakage, monitoring, and life cycle analysis. The selection of specific CO₂ capture technology heavily depends on the type of CO₂ generating plant and fuel used. Among those CO₂ separation processes, absorption is the most mature and commonly adopted due to its higher efficiency and lower cost. Pipeline is considered to be the most viable solution for large volume of CO₂ transport. Among those geological formations for CO₂ storage, enhanced oil recovery is mature and has been practiced for many years but its economical viability for anthropogenic sources needs to be demonstrated. There are growing interests in CO₂ storage in saline aquifers due to their enormous potential storage capacity and several projects are in the pipeline for demonstration of its viability. There are multiple hurdles to CCS deployment including the absence of a clear business case for CCS investment and the absence of robust economic incentives to support the additional high capital and operating costs of the whole CCS process.

© 2014 Published by Elsevier Ltd.

Contents

1. Introduction	427
2. Approaches to mitigate global climate change	427
3. CO ₂ capture technologies	427
3.1. Post-combustion	427
3.2. Pre-combustion	429
3.3. Oxyfuel combustion	429
3.4. Comparison of different combustion technologies for CO ₂ capture	429
4. CO ₂ separation technologies	430
4.1. Absorption	430
4.2. Adsorption	431
4.3. Chemical looping combustion	431
4.4. Membrane separation	431
4.5. Hydrate-based separation	431
4.6. Cryogenic distillation	431
5. CO ₂ transport	432
6. CO ₂ utilization	432
7. CO ₂ geological storage	433
7.1. Enhanced oil recovery (EOR) in oil and gas reservoirs	433
7.2. Unmineable coal bed storage	433
7.3. Storage in saline aquifers	434

* Corresponding author. Fax: +852 2858 5415.

E-mail address: ytleung@hku.hk (D.Y.C. Leung).

7.4. Deep ocean storage	435
7.5. In-situ carbonation	435
8. Life cycle GHG assessment	435
9. CO ₂ leakage and monitoring	436
9.1. Potential leakages	436
9.2. CO ₂ monitoring	436
10. Barriers and opportunities for commercial deployment	437
11. Conclusions	438
Acknowledgments	439
References	439

1. Introduction

Rapid economic growth has contributed to today's ever increasing demand for energy. An obvious consequence of this is an increase in the use of fuels, particularly conventional fossil fuels (i.e. coal, oil and natural gas) that have become key energy sources since the industrial revolution. However, the abundant use of fossil fuels has become a cause of concern due to their adverse effects on the environment, particularly related to the emission of carbon dioxide (CO₂), a major anthropogenic greenhouse gas (GHG). According to the Emission Database for Global Atmospheric Research [1], global emission of CO₂ was 33.4 billion tonnes in 2011, which is 48% more than that of two decades ago. Over the past century, atmospheric CO₂ level has increased more than 39%, from 280 ppm during pre-industrial time [2] to the record high level of 400 ppm in May 2013 with a corresponding increase in global surface temperature of about 0.8 °C [3]. Without climate change mitigation policies it is estimated that global GHG emission in 2030 will increase by 25–90% over the year 2000 level, with CO₂-equivalent concentrations in the atmosphere growing to as much as 600–1550 ppm [4].

The Intergovernmental Panel on Climate Change (IPCC) 5th Assessment Report (AR5) issued in 2013–14 confirmed the 4th Assessment Report's assertion that global warming of our climate system is unequivocal and is associated with the observed increase in anthropogenic greenhouse gas concentrations [2,5]. Furthermore, it is mentioned that 1983–2012 was likely the warmest 30 years period of the last 1400 years in Northern Hemisphere. The same IPCC report (AR5) indicates that to avoid the worst effects of climate change occurring, it is necessary to keep the temperature rise less than 2 °C relative to preindustrial levels and that CO₂ emissions should be reduced globally by 41–72% by 2050 and by 78–118% by 2100 with respect to 2010 levels [5]. Although there was not any binding agreement on CO₂ emission control in the last United Nations Climate Change Conference (COP19) held in November 2013 in Warsaw, Poland, participating countries unanimously looked forward a green economy leading to sustainable development. The IPCC has conducted a comprehensive review on various CCS technologies providing a valuable reference for researchers and policy makers in developing their GHG emission reduction program [6]. However, most of the information can be dated back to 2005 or before and there are a lot of changes since then. Moreover, reviews in literature only account for separate aspects of the CCS technology chain, with a focus on either capture, transport, storage or environmental impact [7–13]. The purpose of this paper is to provide a holistic review on the state of the art of CCS technologies and various relevant aspects, including CO₂ capture (Section 3), separation (Section 4), transport (Section 5), utilization (Section 6), storage (Section 7), life cycle GHG assessment (Section 8), and leakage and monitoring (Section 9). An updated status and outlook for CCS projects together with a discussion on the barriers for commercial deployment (Section 10) will also be provided.

2. Approaches to mitigate global climate change

Different approaches are considered and adopted by various countries to reduce their CO₂ emissions, including

- improve energy efficiency and promote energy conservation;
- increase usage of low carbon fuels, including natural gas, hydrogen or nuclear power;
- deploy renewable energy, such as solar, wind, hydropower and bioenergy;
- apply geoengineering approaches, e.g. afforestation and reforestation; and
- CO₂ capture and storage (CCS).

Table 1 compares the application areas, advantages and limitations of these different approaches. Some of these approaches deal with source emissions reduction, such as adopting clean fuels, clean coal technologies, while others adopt demand-side management, i.e. energy conservation. Each approach has intrinsic advantages and limitations that will condition its applicability. It is unlikely that adopting a single approach or strategy can adequately meet the IPCC goal of CO₂ reduction, i.e. 50–85% by 2050 from 2000 levels, and therefore, a complimentary portfolio of CO₂ emission reduction strategies needs to be developed. Amongst the different approaches, CCS can reduce CO₂ emissions (typically 85–90%) from large point emission sources, such as power production utilities, and energy intensive emitters, e.g. cement kiln plants. In this approach, CO₂ is first captured from the flue/fuel gases, separated from the sorbent, transported and then either stored permanently or reutilized industrially.

CCS includes a portfolio of technologies, involving different processes for CO₂ capture, separation, transport, storage and monitoring that are separately discussed in the following sections.

3. CO₂ capture technologies

CO₂ is formed during combustion and the type of combustion process directly affects the choice of an appropriate CO₂ removal process. CO₂ capture technologies are available in the market but are costly in general, and contribute to around 70–80% of the total cost of a full CCS system including capture, transport and storage [14]. Therefore, significant R&D efforts are focused on the reduction of operating costs and energy penalty. There are three main CO₂ capture systems associated with different combustion processes, namely, post-combustion, pre-combustion and oxyfuel combustion. These three technologies are shown in Fig. 1 and discussed in the following sections.

3.1. Post-combustion

This process removes CO₂ from the flue gas after combustion has taken place. Post-combustion technologies are the preferred

Table 1
Summary of CO₂ reduction strategies.

Strategy	Application area/sector	Advantages	Limitations
Enhance energy efficiency and energy conservation	Applied mainly in commercial and industrial buildings.	Energy saving from 10% to 20% easily achievable.	May involve extensive capital investment for installation of energy saving device.
Increase usage of clean fuels	Substitution of coal by natural gas for power generation.	Natural gas emits 40–50% less CO ₂ than coal due to its lower carbon content and higher combustion efficiency; cleaner exhaust gas (lower particulates and sulfur dioxide emissions).	Higher fuel cost for conventional natural gas. Comparable cost for shale gas.
Adopt clean coal technologies	Integrated gasification combined cycle (IGCC), pressurized fluidized bed combustor (PFBC) etc. to replace conventional combustion.	Allow the use of coal with lower emissions of air pollutants.	Significant investment needed to roll out technologies widely.
Use of renewable energy	Hydro, solar (thermal), wind power, and biofuels highly developed.	Use of local natural resources; no or low greenhouse and toxic gas emissions.	Applicability may depend on local resources availability and cost. Power from solar, wind, marine etc. are intermittent and associated technologies are not mature; most current renewable energies are more costly than conventional energy.
Development of nuclear power	Nuclear fission adopted mainly in US, France, Japan, Russia and China. Nuclear fusion still in research and development phase.	No air pollutant and greenhouse gas emissions.	Usage is controversial; development of world's nuclear power is hindered due to the Fukushima Nuclear Accident in 2011, e.g. Germany will phase out all its nuclear power by 2022.
Afforestation and reforestation	Applicable to all countries.	Simple approach to create natural and sustainable CO ₂ sinks.	Restricts/prevents land use for other applications.
Carbon capture and storage	Applicable to large CO ₂ point emission sources.	It can reduce vast amount of CO ₂ with capture efficiency > 80%.	CCS full chain technologies not proven at full commercial scale.

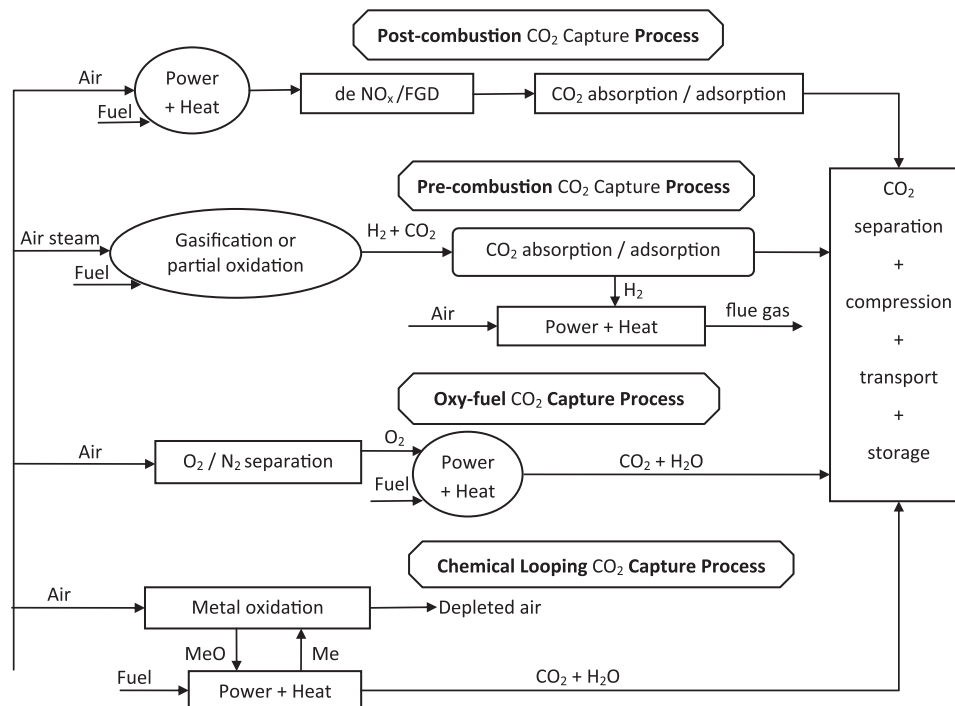


Fig. 1. CO₂ capture technologies.

option for retrofitting existing power plants. The technology has been proven at small-scale with CO₂ recovered at rates up to 800 t/day [15]. However, the major challenge for post-combustion CO₂ capture is its large parasitic load. Since the CO₂ level in combustion flue gas is normally quite low (i.e. 7–14% for coal-fired and as low as 4% for gas-fired), the energy penalty and associated costs for the capture unit to reach the concentration of CO₂ (above 95.5%) needed for transport and storage are elevated [16–18]. The

U.S. National Energy Technology Laboratory estimated that CO₂ post-combustion capture would increase the cost of electricity production by 70% [19]. A recent study reported that the cost of electricity would increase by 32% and 65% for post-combustion in gas and coal-fired plants, respectively [20]. It has been identified that 16 large scale integrated CCS projects are currently operating or under construction but two of them are of post-combustion technology [21].

3.2. Pre-combustion

In this process, the fuel (normally coal or natural gas) is pre-treated before combustion. For coal, the pretreatment involves a gasification process conducted in a gasifier under low oxygen level forming a syngas which consists mainly of CO and H₂, and is mainly free from other pollutant gases (Eq. 1). The syngas will then undergo water gas shift reaction with steam forming more H₂ while the CO gas will be converted to CO₂ (Eq. 2):



The high CO₂ concentration (> 20%) in the H₂/CO₂ fuel gas mixture facilitates the CO₂ separation [18], and typical CO₂ separation methods are discussed in Section 4. Subsequently, the H₂ is burned in air producing mainly N₂ and water vapor. Pre-combustion capture can be applied to Integrated Gasification Combined Cycle (IGCC) power plants using coal as fuel, but this will incur an efficiency loss of 7–8% [15,22]. EPRI and US DOE have developed a roadmap of IGCC technology developments that can potentially improve the IGCC efficiency matching or exceeding the current IGCC technology without capture [22].

Natural gas, as it mainly contains CH₄, can be reformed to syngas containing H₂ and CO (Eq. (3)). The content of H₂ can be increased by the water gas shift reaction (Eq. (2)) and the rest of the process is similar to that described above for coal [23]. Hoffmann et al. [24] conducted a performance and cost analysis on advanced combined cycle gas turbine plants operated by natural gas with a pre-combustion CO₂ capture system and obtained a CO₂ capture efficiency of 80% with the cost of CO₂ avoided reaching \$29/t CO₂ for an advanced design concept.

3.3. Oxyfuel combustion

In oxyfuel combustion, oxygen, instead of air, is used for combustion. This reduces the amount of nitrogen present in the exhaust gas that affects the subsequent separation process. Substantial reduction in thermal NO_x is another advantage of this process [25]. With the use of pure oxygen for the combustion, the major composition of the flue gases is CO₂, water, particulates and SO₂. Particulates and SO₂ can be removed by conventional electrostatic precipitator and flue gas desulfurization methods, respectively. The remaining gases, contain high concentration of CO₂ (80–98% depending on fuel used [26]), can be compressed, transported and stored. This process is technically feasible [25] but consumes large amounts of oxygen coming from an energy intensive air separation unit [27]. This results in high cost and the energy penalty may reach over 7% compared with a plant without CCS [28,29]. Also, high SO₂ concentration in the flue gas may intensify the system's corrosion problems. At present, there is no full scale oxyfuel-fired projects in the range of 1000–2000 MWth under development but a few sub-scale commercial demonstration plants are under development worldwide such as the 25 MWe and 250 MWe oxy-coal units proposed by CS Energy and Vattenfall, respectively [29].

3.4. Comparison of different combustion technologies for CO₂ capture

Table 2 compares the three CO₂ capture technologies described above. Pre-combustion is mainly applied to coal-gasification plants, while post-combustion and oxyfuel combustion can be applied to both coal and gas fired plants. Post-combustion technology is currently the most mature process for CO₂ capture [26,30]. On the cost side, Gibbins and Chalmers [31] compared the three technologies for both gas and coal-fired plants (Table 3). They reported that for coal-fired plants the pre-combustion technology presented the lowest cost per tonne of CO₂ avoided, while the post-combustion and oxyfuel technologies are of similar costs. However, for gas-fired plants, the cost per tonne of CO₂

Table 2
Advantages and disadvantages of the different CO₂ capture technologies.

Capture process	Application area	Advantages	Disadvantages
Post-combustion	Coal-fired and gas-fired plants	Technology more mature than other alternatives; can easily retrofit into existing plants;	Low CO ₂ concentration affects the capture efficiency;
Pre-combustion	Coal-gasification plants	High CO ₂ concentration enhance sorption efficiency; fully developed technology, commercially deployed at the required scale in some industrial sectors; opportunity for retrofit to existing plant;	Temperature associated heat transfer problem and efficiency decay issues associated with the use of hydrogen-rich gas turbine fuel; high parasitic power requirement for sorbent regeneration; inadequate experience due to few gasification plants currently operated in the market; high capital and operating costs for current sorption systems;
Oxyfuel combustion	Coal-fired and gas-fired plants	Very high CO ₂ concentration that enhances absorption efficiency; mature air separation technologies available; reduced volume of gas to be treated, hence required smaller boiler and other equipment;	High efficiency drop and energy penalty; cryogenic O ₂ production is costly; corrosion problem may arise;
Chemical looping combustion	Coal-gasification plants	CO ₂ is the main combustion product, which remains unmixed with N ₂ , thus avoiding energy intensive air separation;	Process is still under development and inadequate large scale operation experience;

Table 3
Cost comparison for different capture processes [211]. Costs include CO₂ compression to 110 bar but excluding storage and transportation costs.

Fuel type	Parameter	Capture technology			
		No capture	Post-combustion	Pre-combustion	Oxy-fuel
Coal-fired	Thermal efficiency (% LHV)	44.0	34.8	31.5	35.4
	Capital cost (\$/kW)	1410	1980	1820	2210
	Electricity cost (c/kWh)	5.4	7.5	6.9	7.8
	Cost of CO ₂ avoided (\$/t CO ₂)	–	34	23	36
Gas-fired	Thermal efficiency (% LHV)	55.6	47.4	41.5	44.7
	Capital cost (\$/kW)	500	870	1180	1530
	Electricity cost (c/kWh)	6.2	8.0	9.7	10.0
	Cost of CO ₂ avoided (\$/t CO ₂)	–	58	112	102

Table 4
Comparison of different separation technologies.

Technology	Advantage	Disadvantage	Reference
Absorption	<ul style="list-style-type: none"> – High absorption efficiency (> 90%). – Sorbents can be regenerated by heating and/or depressurization. – Most mature process for CO₂ separation. 	<ul style="list-style-type: none"> – Absorption efficiency depends on CO₂ concentration. – Significant amounts of heat for absorbent regeneration are required. – Environmental impacts related to sorbent degradation have to be understood. 	[30,33,35]
Adsorption	<ul style="list-style-type: none"> – Process is reversible and the absorbent can be recycled. – High adsorption efficiency achievable (> 85%). 	<ul style="list-style-type: none"> – Require high temperature adsorbent. – High energy required for CO₂ desorption. 	[43–45,212]
Chemical looping combustion	<ul style="list-style-type: none"> – CO₂ is the main combustion product, which remains unmixed with N₂, thus avoiding energy intensive air separation. 	<ul style="list-style-type: none"> – Process is still under development and there is no large scale operation experience. 	[58–60]
Membrane separation	<ul style="list-style-type: none"> – Process has been adopted for separation of other gases. – High separation efficiency achievable (> 80%). 	<ul style="list-style-type: none"> – Operational problems include low fluxes and fouling. 	[35,61,63,213]
Hydrate-based separation	<ul style="list-style-type: none"> – Small energy penalty. 	<ul style="list-style-type: none"> – New technology and more research and development is required. 	[13,19,67,68]
Cryogenic distillation	<ul style="list-style-type: none"> – Mature technology. – Adopted for many years in industry for CO₂ recovery. 	<ul style="list-style-type: none"> – Only viable for very high CO₂ concentration > 90% v/v. – Should be conducted at very low temperature. – Process is very energy intensive. 	[72,74]

avoided for the post-combustion capture was almost 50% lower than the other two capture technologies. Moreover, the post-combustion CO₂ capture is normally the least efficient option, with an energy penalty of about 8% and 6% for the coal-fired and gas-fired plants, respectively [32].

4. CO₂ separation technologies

This section describes the main CO₂ separation technologies that can be applied to isolate the CO₂ from the flue/fuel gas stream prior to transportation. Advanced technologies, such as wet scrubber, dry regenerable sorbents, membranes, cryogenics, pressure and temperature swing adsorption, and other advanced concepts have been developed. These technologies are compared in Table 4 and discussed below.

4.1. Absorption

A liquid sorbent is used to separate the CO₂ from the flue gas. The sorbent can be regenerated through a stripping or regenerative process by heating and/or depressurization. This process is the most mature method for CO₂ separation [30]. Typical sorbents include monoethanolamine (MEA), diethanolamine (DEA) and potassium carbonate [33]. Among the various aqueous

alkanolamines, such as MEA and DEA, Veawab et al. [34] found that MEA is the most efficient one for CO₂ absorption with efficiency over 90%. Subsequently, Aaron et al. [35] conducted a review on various CO₂ capture technologies and concluded that the most promising method for CO₂ capture for CCS is absorption using MEA. An absorption pilot plant with 1 t CO₂/h was constructed and successfully tested together with the post-combustion capture technology for a coal-fired power plant using a solvent containing 30% MEA [36]. Some other sorbents, such as piperazine and anion-functionalized ionic liquid have also received attention in recent years [37]. Piperazine has been found to react much faster than MEA, but because it has a larger volatility than MEA, its application in CO₂ absorption is more expensive and is still under development [38].

One important challenge for the large deployment of this technology for CCS is its potential amine degradation, resulting in solvent loss, equipment corrosion and generation of volatile degradation compounds [39,40], while that atmospheric degradation has not been included. Moreover, amine emissions can degrade into nitrosamines and nitramines [41], which are potentially harmful to the human health and the environment. Chilled ammonia process uses aqueous ammonium salts (such as ammonium carbonate) to capture CO₂ that can make use of waste heat to regenerate the CO₂ at elevated temperature and pressures to reduce downstream compression [42]. This process will generate

less problem as compared to those that amine is facing with degradation.

4.2. Adsorption

In contrast to absorption processes which use a liquid absorbent, a solid sorbent is used to bind the CO₂ on its surfaces. Large specific surface area, high selectivity and high regeneration ability are the main criteria for sorbent selection. Typical sorbents include molecular sieves, activated carbon, zeolites, calcium oxides, hydro-talcites and lithium zirconate.

The adsorbed CO₂ can be recovered by swinging the pressure (PSA) or temperature (TSA) of the system containing the CO₂-saturated sorbent. PSA is a commercial available technology for CO₂ recovery from power plants that can have efficiency higher than 85% [43,44]. In this process, CO₂ is preferentially adsorbed on the surface of a solid adsorbent at high pressure, which will swing to low pressure (usually atmospheric pressure) to desorb the adsorbent and release CO₂ for subsequent transport. In TSA, the adsorbed CO₂ will be released by increasing the system temperature using hot air or steam injection. The regeneration time is normally longer than PSA but CO₂ purity higher than 95% and recovery higher than 80% can be achieved [45]. Operating cost of a specific TSA process was estimated to be of the order of 80–150 US \$/tonne CO₂ captured [46]. Finally, the use of residues from industrial and agricultural operations to develop sorbents for CO₂ capture has attracted significant attention to reduce the total costs of capture [47–50].

4.3. Chemical looping combustion

A metal oxide is used as an oxygen carrier instead of using pure oxygen directly for the combustion as in the case of oxyfuel combustion. During the process the metal oxide is reduced to metal while the fuel is being oxidized to CO₂ and water. The metal is then oxidized in another stage and recycled in the process. Water, the process by-product, can be easily removed by condensation, while pure CO₂ can be obtained without consumption of energy for separation. There are a wide variety of metal oxides that are of low-cost and suitable for this process including Fe₂O₃, NiO, CuO and Mn₂O₃. The effectiveness of different metal oxides in this process has been studied by various researchers [51–56]. Adánez et al. [54] found that support inert materials can be used to optimize the performance of the metal oxides, but the choice of inert material will depend on the type of metal oxide used. Lyngfelt et al. [57] studied experimentally the feasibility of chemical looping in a boiler with a design of two interconnected fluidized beds. This technology has been reviewed recently by Lyngfelt and Mattisson [58]. Both Lyngfelt and Mattisson [58] and Adanez et al. [59] found that this process is a very promising technology for CO₂ capture. Erlach et al. [60] compared the CO₂ separation of IGCC using pre-combustion with that of chemical looping combustion and found that the net plant efficiency of the latter is 2.8% higher than the former case.

4.4. Membrane separation

Membranes can be used to allow only CO₂ to pass through, while excluding other components of the flue gas. The most important part of this process is the membrane which is made of a composite polymer of which a thin selective layer is bonded to a thicker, non-selective and low-cost layer that provides mechanical support to the membrane [61]. This method has also been used to separate other gases such as O₂ from N₂, and CO₂ from natural gas. Through the development of high efficient membranes, Audus [62] and Gielen [63] achieved a CO₂ separation

efficiency from 82% to 88%. The development of ceramic and metallic membranes [35] and polymeric membranes [64] for membrane diffusion could produce membranes significantly more efficient for CO₂ separation than liquid absorption processes. Brunetti et al. [65] conducted a general review on current CO₂ separation technology using membranes and compared with other separation technologies such as adsorption and cryogenic. It pointed out that the performance of a membrane system is strongly affected by the flue gas conditions such as low CO₂ concentration and pressure, which are the main hurdles for applying this technology. Furthermore, Bernardo et al. [66] revealed that although there are significant developments in gas separation membrane systems, they are still far away to realize the potentialities of this technology.

4.5. Hydrate-based separation

Hydrate-based CO₂ separation is a new technology by which the exhaust gas containing CO₂ is exposed to water under high pressure forming hydrates. The CO₂ in the exhaust gas is selectively engaged in the cages of hydrate and is separated from other gases. The mechanism is based on the differences of phase equilibrium of CO₂ with other gases, where CO₂ can form hydrates easier than other gases such as N₂ [67].

This technology has the advantage of small energy penalty (6–8%) [19] and the energy consumption of CO₂ capture via hydrate could be as low as 0.57 kWh/kg-CO₂ [67]. Improving the hydrate formation rate and reducing hydrate pressure can improve the CO₂ capture efficiency [67]. Tetrahydrofuran (THF) is a water-miscible solvent, which can form solid clathrate hydrate structures with water at low temperatures. So the presence of THF facilitates the formation of hydrate and is frequently used as a thermodynamic promoter for hydrate formation. Englezos et al. [68] found that the presence of small amount of THF substantially reduces the hydrate formation pressure from a flue gas mixture (CO₂/N₂) and offers the possibility to capture CO₂ at medium pressures. Recently, Zhang et al. [69] studied the effects and mechanism of the additive mixture on the hydrate phase equilibrium using the isochoric method and confirmed the effect of THF on hydrate formation. US DOE considers this technology to be the most promising long term CO₂ separation technology identified today and is currently in the R&D phase [19,70,71].

4.6. Cryogenic distillation

Cryogenic distillation is a gas separation process using distillation at very low temperature and high pressure, which is similar to other conventional distillation processes except that it is used to separate components of gaseous mixture (due to their different boiling points) instead of liquid. For CO₂ separation, flue gas containing CO₂ is cooled to desublimation temperature (–100 to –135 °C) and then solidified CO₂ is separated from other light gases and compressed to a high pressure of 100–200 atmospheric pressure. The amount of CO₂ recovered can reach 90–95% of the flue gas. Since the distillation is conducted at extremely low temperature and high pressure, it is an energy intensive process estimated to be 600–660 kWh per tonne of CO₂ recovered in liquid form [72]. Several patented processes have been developed and research has mainly focused on cost optimization [73,74]. The evaluation of low temperature processes for producing high purity, high pressure CO₂ from oxyfuel combustion flue gas through simulation and modeling in Aspen HYSYS has also been investigated [75].

5. CO₂ transport

Once CO₂ is separated from the rest of the flue gas components it needs to be transported to the storage site or to the facilities for its industrial utilization. Whatever the chosen final fate of CO₂, a reliable, safe and economically feasible system of transport is a key feature of any CCS project. Depending on the volumes involved a variety of means of transport may be utilized, ranging from road tankers to ships and pipelines. A study related to CCS in the North Sea highlights that CO₂ transport by ship tanker, using technologies derived from the LPG carriers, is feasible and cost competitive with pipelines with a total cost ranging from 20 to 30 USD/tonne when more than 2MtCO₂/year are transported within the distances involved in North Sea storage [76].

Pipelines are considered to be the most viable method for onshore transport of high volume of CO₂ through long distances as CCS would likely involve when widely deployed [77]. Pipelines are also the most efficient way for CO₂ transport when the source of CO₂ is a power plant which lifetime is longer than 23 years. For shorter period road and rail tankers are more competitive [78]. The cost of transport varies considerably with regional economic situation. A cost analysis in China shows that for a mass flow of 4000 t CO₂/day the use of ship tankers will cost 7.48 USD/tonne CO₂ compared with 12.64 USD/tonne CO₂ for railway tankers and 7.05 USD/tonne CO₂ for 300 km pipelines [79].

In order to optimize the mass/volume ratio CO₂ is carried as dense phase either in liquid or supercritical conditions. Supercritical is the preferred state for CO₂ transported by pipelines, which implies that the pipelines operative temperature and pressure should be maintained within the CO₂ supercritical envelop, i.e. above 32.1 °C and 72.9 atm. [80]. The typical range of pressure and temperature for a CO₂ pipeline is between 85 and 150 bar, and between 13 °C and 44 °C to ensure a stable single-phase flow through the pipeline [81]. The drop in pressure due to the reduction of the hydraulic head along the pipeline is compensated by adding recompression stations. Larger diameter pipelines allow lower flow rates with smaller pressure drop and therefore a reduced number of recompression stations; on the other hand larger pipelines are more expensive therefore a balancing of costs needs to be considered [81].

Impurities in the CO₂ stream represent a serious issue because their presence can change the boundaries of the pressure and temperature envelope within which a single-phase flow is stable. Moreover, the presence of water concentration above 50 ppm may lead to the formation of carbonic acid inside the pipeline and cause corrosion problems. Hydrates may also form that may affect the operation of valves and compressors. The estimated values of corrosion on the carbon steel commonly used for pipeline's construction can be up to 10 mm/year [81,82].

Currently only a few pipelines are used to carry CO₂ and are almost all for EOR projects. The oldest is the Canyon Reef Carriers pipeline, a 225 km pipeline built in 1972 for EOR in Texas (USA). The longest is the 800 km Cortez pipeline which is carrying 20 million tonne/year of CO₂ from a natural source in Colorado to the oil fields in Denver City, Texas since 1983 [81].

CO₂ pipelines are mostly made of carbon steel and composed of insulated 12 m sections with crack arresters every 350 m and block valves every 16–32 km. The onshore pipelines are buried in trenches of about 1 m deep. Offshore pipelines in shallow water also need to be deployed in trenches as protection from fishing and mooring activities. Deep water pipelines generally do not need to be buried unless their diameter is below 400 mm [81,83].

The rate of accidents involving CO₂ pipelines is relatively low with a value of 0.30/year for every 1000 km calculated during the period 1990–2001 considered for an overall pipelines extension of 2800 km [84]. The enlargement of the pipelines network leads to

an increase in the number of accidents up to 0.76/year for every 1000 km in 2002–2008 calculated over an overall pipeline length of 5800 km [85]. These values are still well below the ones involving pipelines for gas/oil or other hazardous fluids. However, the current CO₂ pipeline network is far smaller than that for gas/oil transport, and therefore, the statistical significance of these values is somewhat uncertain.

For commercial scale CCS projects an extensive network of CO₂ pipelines needs to be developed. An integrate network, where different sources will merge for their final transport to the storage areas, can reduce the total pipelines length by 25%, but it will require that all sources produce CO₂ stream with the same quality (e.g. pressure, *T*, water content) before being combined together [82]. When the flow managed through a network of pipelines increases there is an exponential decrease in the cost of transport; models highlight that the cost for transporting CO₂ along a 1000 km pipeline is around 8 USD/tonne for a mass flow of 25 MtCO₂/year with a further reduction down to 5 USD/tonne if the flow increases to 200 MtCO₂/year [86]. Further cost saving may be achieved from the reuse of existing gas pipelines but their suitability is to be verified. One of the biggest uncertainties is the effects on the pipelines' integrity of long term exposure to CO₂ fluxes in terms of corrosion and potential brittle fractures propagation due to the sharp cooling of the pipelines in case of leak of supercritical CO₂ [87].

The pipelines have to be periodically monitored to assess their integrity and an accurate fiscal metering system is to be in place to assure the quantification of the stored fluxes. The equipment used for gas/oil pipelines need to be modified to withstand the challenging environment experienced inside a CO₂ pipeline. Poor lubrication capacity of CO₂, high chemical reactivity and high pressure may all affect the performance of both monitoring and metering equipment [88].

Other issues could arise from the trans-national transport of CO₂ and offshore storage due to legal aspects. The two key documents are the Convention for the Protection of the Marine Environment of the North East Atlantic (OSPAR Convention) and the London Protocol. These treaties do not allow waste dumping in marine environment and they also limit the cross border transport of pollutants. In 2007 the OSPAR Convention was amended allowing sub-seabed CO₂ storage and entered into force following the needed ratification by seven countries on 23 June 2011. In 2006 an amendment was made to Annex 1 of the London Protocol allowing CO₂ to be injected in sub-seabed geological formations. Being an amendment to an Annex it does not need to be ratified and entered in force on 10 February 2007, 100 days after being proposed as for rules of the London Protocol. A second amendment was proposed in 2009 in order to remove the restriction for cross border transport of CO₂ for geological storage; this is an amendment to the Protocol itself and therefore needs to be ratified by two-thirds of the 42 contracting parties. So far only Norway and the UK have ratified the document [89]. CO₂ transport for EOR is allowed under existing legislation both in USA [85] and Europe [89], but there is no guarantee that the same approach will be maintained for the far larger volumes needed to be transported for large scale CCS operations.

6. CO₂ utilization

After capture, the high CO₂ content stream can be transported for geological storage (see Section 7), or for CO₂ utilization. Kikuchi [90] evaluated the economic and technical aspects of large scale CO₂ recycling and proposed an integrated scheme for CO₂ recovery and reuse in industry, agriculture and energy production. A demonstration plant in Luzhou, China was recently commissioned

that produces ammonia and urea using the CO₂ captured (160 t/day) from its production process [91]. CO₂ can also be used in other areas such as food beverages, refrigerants and fire extinguishing gases. Current CO₂ utilization accounts for only 2% of emissions, but forecasts predict chemical utilization could mitigate 700 megatons of CO₂ per year, far greater than the combined potential of nuclear, wind and cellulosic biofuel technologies [92]. Enhanced oil recovery (EOR) using CO₂ from capture processes can significantly increase CO₂ utilization [93], and this application is described in Section 7.1. Other related new sectors include the use of CO₂ as a cushion gas for energy storage [94].

CO₂ can be utilized through mineralization, a process based on the accelerated reaction of CO₂ with Mg/Ca rich silicate rocks or inorganic wastes to form stable carbonates which can be used [95]. The unfavorable kinetics of this process is overcome by (i) directly increasing the pressure and/or temperature or, (ii) indirectly, by using aggressive leaching agents. Among the indirect routes, the pH swing has received significant attention as it allows the recyclability of the chemicals used during the process separation and recovery of pure products [96–104].

Large scale, economic photocatalytic conversion of CO₂ into methane (CH₄) and/or methanol (CH₃OH) represents a formidable scientific and technical challenge [105]. Recent progress in this area has focused mainly on the development of novel catalysts through advances in nanotechnology [106,107]. Few photocatalytic reactors have been tested for ultraviolet driven CO₂ reduction [108], and these generally operate as batch processes [109], with even more limited solar reactor studies published [110,111], predominantly operated in batch mode and within the context of wastewater treatment and air purification [112].

7. CO₂ geological storage

CO₂ can be stored into geological formations such as deep saline aquifers which have no other practical use, and oil or gas reservoirs. Geological storage is at present considered to be the most viable option for the storage of the large CO₂ quantities needed to effectively reduce global warming and related climate change [113–116]. A typical geological storage site can hold several tens of million tonnes of CO₂ trapped by different physical and chemical mechanisms [117].

Suitable geological sites for CO₂ storage have to be carefully selected. General requirements for geological storage of CO₂ include appropriate porosity, thickness, and permeability of the reservoir rock, a cap rock with good sealing capability, and a stable geological environment [118]. Requirements such as distance from the source of CO₂, effective storage capacity, pathways for potential leakage and in general economic constraints may limit the feasibility of being a storage site. Bachu [119] described the criteria and approaches for selecting suitable geological sites for storing CO₂, including the tectonic setting and geology of the basin, its geothermal regime, hydrology of formation waters, hydrocarbon potential and basin maturity. In addition, economic aspects related to infrastructure and socio-political conditions will also affect the site selection. Furthermore, although techniques for geological storage can be derived from existing processes, mostly enhanced oil recovery (EOR) projects, there is no real experience yet at commercial scale, and the potential long term environmental effects of large amounts of CO₂ stored is also limited.

Three different geological formations are commonly considered for CO₂ storage: depleted (or nearly depleted) oil and gas reservoirs, unmineable coal beds, and saline aquifers. Deep ocean storage is also a feasible option for CO₂ storage although environmental concerns (such as ocean acidification and eutrophication) will likely limit its application. It has been shown that CO₂ storage

potential can reach 400–10,000 GT for deep saline aquifers compared with only 920 GT for depleted oil and gas fields and > 15 GT in unmineable coal seams [120]. Different geological settings have different criteria of consideration for their reliability as CO₂ storage areas and these are discussed below.

7.1. Enhanced oil recovery (EOR) in oil and gas reservoirs.

CO₂ can be injected into depleted (or nearly depleted) oil/gas reservoirs to increase their pressure and provide the driving force to extract residual oil and gases, while the injected CO₂ remains stored there permanently. Up to 40% of the residual oil left in an active reservoir can be extracted after primary production [121]. In fact, fluids injection methods have been widely used in the oil and gas extraction industry for decades to enhance the recovery of the residual oil and gases. Therefore, there is an economical incentive for injecting CO₂ (recovered from an associated capture process) into depleted oil and gas reservoirs in order to offset the high CCS cost commonly involved in the process. Technologies for injection of CO₂ for EOR are mature and there are studies on various aspects of EOR, such as migration simulation [122,123], geochemical modeling [124,125], and leakage/risk assessment [126].

Several EOR projects for CO₂ storage are ongoing, as shown in Table 5. The largest one is the Weyburn project that started in 2000 in the Weyburn oil reservoir in Saskatchewan, Canada. Although the aim of the project is not to investigate the potential for CO₂ storage, the reservoir is estimated to be able to store more than 30 million tonnes of CO₂ captured from a gasification plant in North Dakota, USA and transported to the site through a 320 km pipeline. A number of larger EOR projects with much larger storage capacity are planned (such as Hatfield and California DF2) and will be commissioned in the next few years. This will build confidence in operators for the feasibility of larger CO₂ storage demonstration projects.

7.2. Unmineable coal bed storage

CO₂ can be injected into deep coal beds to recover methane which is trapped in the porous structure of coal seams. This process, called CO₂ enhanced coal bed methane (CO₂-ECBM),

Table 5
List of current and planned EOR projects.

Project name	Location	Year of operation start	Max. CO ₂ injection rate Mt/year	Reference
Jilin oil field	Jilin, China		0.1	[214,215]
Weyburn-Midale	Saskatchewan, Canada	2000	2.2	[216–218]
Paradox Basin	Utah, USA	2005	0.14	[219,220]
Salt Creek	Wyoming, USA	2006	2.2	[143]
Williston Basin	North Dakota, USA	2011	1.0	[221]
South Heart	North Dakota, USA	2012	0.6	[143]
Oologah	Oklahoma, USA	2012	1.5	[222]
Masdar	Abu Dhabi, United Arab Emirates	2012	1.7	[223,224]
Hatfield	Hatfield, U.K.	2013	6.5	[143]
California (DF2)	California, USA	2014	5	[225]
Mongstad	Mongstad, Norway	2014	1.5	[143]
Trailblazer	Texas, USA	2014	4.3	[143,226]
Greengem	China	2015	0.7	[143]
Genesee (EPCOR)	Alberta, Canada	2015	3.6	[143,227]

allows CO₂ to be stored in the void fraction made available by removal of the trapped methane in the coal seams. Extraction of coal bed methane (CBM) has been adopted in coal seams for many years and there are several commercial CBM extraction sites in the world, mostly in the USA (Table 6). White et al. [127] conducted a very comprehensive review on the CO₂ sequestration in deep unmineable coal beds with recovery of methane gas. Several key issues, such as estimation of potential storage capacity, storage integrity, physical and chemical processes, environmental health and safety, etc., were highlighted in their study.

CO₂ storage in deep unmineable coal bed with simultaneous methane gas recovery has been successfully carried out in several coal bed sites such as that in New Mexico, USA [128] and Alberta, Canada [129]. A list of CO₂-ECBM projects currently conducted or planned worldwide is shown in Table 6. The technology for CO₂-ECBM has additional economic incentives, and there are large coalbed methane resources worldwide, including China, Australia and the USA [130]. However, many of the coal seams (such as those in China and Western Europe) have low permeability that would make this process not applicable [128]. A field pilot test conducted at Yubari in Japan during the period of 2002–2007 indicated that reduction of permeability is one of the main technical issues to be solved in order to make large scale CO₂-ECBM economically viable [131].

7.3. Storage in saline aquifers

Deep aquifers at 700–1000 m below ground level often host high salinity formation brines [132]. These saline aquifers have no commercial value but can be used to store injected CO₂ captured from CCS process. Deep saline aquifers can be found in widespread areas both onshore and offshore and are considered to have enormous potential for storage of CO₂ [6]. Despite of the high potential for CO₂ storage, there are comparatively less knowledge about the CO₂ storage features of saline aquifers as compared to other geological sites such as coal seams and oil fields.

Different trapping mechanisms take place in saline aquifers when CO₂ is injected. The main features of these mechanisms are shown in Table 7, and a detailed review was published [133]. Yang et al. [115] conducted a review on the characteristics of CO₂ sequestration in saline aquifers, including CO₂ phase behavior,

CO₂–water–rock interaction, and CO₂ trapping mechanisms that include hydrodynamic, residual, solubility and mineral trapping [61,129,134]. The parameters affecting mineral trapping of CO₂ sequestration in brines have been extensively investigated [135–138]. Recently, Szulczewski et al. [139] evaluated how pressure rises during injection and how CO₂ is trapped in the pore space of deep saline aquifers, which help the estimation of the CO₂ storage capacity.

Over the past two decades several pilot and commercial projects for CO₂ storage on saline or deep saline aquifers have been launched. Statoil's Sleipner project in the North Sea, as part of a commercial natural gas operation, stores around 1 Mt CO₂/year in a deep saline aquifer hosted in the Utsira Sand formation, about 1000 m below the seafloor with an available volume for CO₂ storage in the order of $6.6 \times 10^8 \text{ m}^3$ [140–142]. This project started in 1996 and is one of the earliest CCS projects. Other current and approved projects of different scales (i.e. commercial, pilot and demonstration) can be found in Rai et al. [143], Michael et al. [144] and Global CCS Institute [87], and are summarized in Table 8. It can be observed that previous and existing projects are of small CO₂ injection capacity ($\leq 1.3 \text{ Mt/year}$) but future projects (such as the Gorgon and the Latrobe Valley projects in Australia) would have much larger CO₂ injection capacity ($\geq 4.5 \text{ Mt/year}$).

White et al. [127] conducted a comprehensive review on the storage of the captured CO₂ in deep saline aquifers and commented that, with the experience gained in several concurrent projects, storage of CO₂ in deep saline aquifers is technically feasible, and can have little or no negative environmental impacts. Michael et al. [144] conducted a similar study based on the experience from existing storage operations and presented similar conclusions as White et al. [127]. These authors also discussed the importance of monitoring and verification, and pointed out that there are limited monitoring programs for existing projects, as well as limited data from post-injection monitoring of CO₂ behavior in the storage reservoir. Nevertheless, the experience gained in these operations helps to establish best practice guidelines for future CO₂ geological storage. More recently, Myer [116] reviewed the global status of geological CO₂ storage and indicated the lack of data on post-injection behavior inside the storage reservoir and the need for more field assessments on the processes that lead to plume stabilization and long term trapping.

Table 6
List of current and planned CO₂-ECBM projects.

Project Name	Location	Year of operation start	Max. CO ₂ injection rate Mt/year	Reference
San Juan Basin	New Mexico, USA	1996	0.1	[128,228,229]
Fenn Big Valley	Alberta, Canada	1998	0.02	[129,230]
Recopol	Poland	2003	400 t/year	[143]
Qinshui Basin	China	2003	0.01	[143]
Yubari	Japan	2004	0.004	[143]
Permian Basin	Texas, USA	2005	0.3	[219,220,231]
Farnham Dome/Uinta Basin	Utah, USA	2005	0.9	[216,232]
Hokkaido	Japan	2015	0.01	[143]

Table 7
Types and mechanisms of CO₂ trapping in saline aquifers [61,129,134].

Trapping mechanism	CO ₂ trapping phase	Description of mechanism
Hydrodynamic Residual	Supercritical fluid	Undissolved CO ₂ is trapped by overlying low-permeability caprock; CO ₂ will be gradually dispersed. CO ₂ rises through water-saturated rock and displacing water from the pore space; the whole rock volume retains a residual saturation of CO ₂ .
	Gas phase	
Solubility Mineral	Dissolved liquid phase	CO ₂ is dissolved in the formation brine water; a major trapping mechanism. Dissolved CO ₂ reacts with Ca, Fe, or Mg based mineral to form carbonate precipitates; not subject to leakage.
	Reacted solid phase	

Table 8
Current and planned projects of CO₂ storage in saline aquifers.

Project name	Location	Scale ^a	Year of injection start	Max. CO ₂ injection rate Mt/year	Reference
Alberta Basin	Alberta & B.C. Canada	C	1990	0.1	[233,234]
Sleipner	North sea, Norway	D	1996	1.0	[184,235,236]
Frio	USA	P	2004	0.1	[143]
In Salah	Krechba, Algeria	D	2004	1.3	[237]
Snøhvit	Barents Sea, Norway	D	2008	0.7	[238,239]
MRCSP- Michigan Basin	Gaylord, MI, USA	P	2008	0.2	[240,241]
MRCSP-Cincinnati Arch	Kentucky, USA	P	2009	0.2	[242,243]
SECARB Early	Cranfield, MS, USA	D	2009	1.0	[244,245]
Mountaineer	West Virginia, USA	C	2009	0.1	[143,246]
MGSC Decatur	Decatur, IL, USA	D	2010	0.4	[247–249]
ZeroGen	Queensland, Australia	P	2012	0.7	[143,250]
Brindisi	Italy	P	2012	1.2	[143,251]
Gorgon	Barrow Island, WA, Australia	D	2014	4.5	[252,253]
Latrobe Valley	Victoria, Australia	C	2015	13	[143,254]
Nagaoka	Japan	P	2015	0.007	[144]
Edwardsport	Indiana, USA	P	2015	1.0	[255]

^a C: commercial; P: pilot; D: demonstration.

7.4. Deep ocean storage

Oceans cover more than 70% of Earth's surface and are the biggest natural CO₂ sink. It is estimated that oceans contain about 38,000 Gt of carbon and take up carbon from the atmosphere at a rate of about 1.7 Gt annually. At the same time, oceans produce 50–100 Gt carbon (in the form of phytoplankton) annually, which is greater than the intake by terrestrial vegetation [145]. The carbon inventory in the ocean is enormous at about 50 times greater than that of our atmosphere [61]. At depths greater than 3 km, CO₂ will be liquefied and sunk to the bottom due to its higher density than the surrounding seawater [119,146]. Mathematical models suggest that CO₂ injected in this way could be kept for several hundred years [147]. House et al. [146] further showed that injecting CO₂ into deep sea sediments at a depth greater than 3 km can provide permanent geological storage of CO₂ even with large geomechanical perturbations. Therefore, deep ocean storage can present a potential sink for large amounts of anthropogenic CO₂. However, this approach is more controversial than other geological storage methods. Injecting large amounts of CO₂ directly into our oceans may affect the seawater chemistry (such as reducing its pH) causing ocean acidification, which may lead to disastrous consequences to the marine ecosystem [148]. Comparatively fewer studies have been conducted in this area, particularly on its effect on the marine ecosystem. Hall-Spencer et al. [149] studied the effect of ocean acidification on an ecosystem near volcanic CO₂ vents and concluded that ocean acidification will probably reduce the biodiversity and alter profoundly the ecosystems. Rodolfo-Metalpa et al. [150] also agreed that the ocean ecosystems' resistance to acidification could be worsened by higher temperatures due to global warming. Espa et al. [151] and Caramanna et al. [152] carried out field studies in a volcanic island Panarea in Italy and laboratory investigations to examine the bubbles plumes effect due to sub-seabed CO₂ leakage. They found the development of a pseudo-convective cell around the rising plume forming vortices that act as a physical barrier inhibiting the interaction between the plume and the surrounding water. Moreover, the depth of the thermocline plays an important role in the diffusion of the CO₂ seepage through the overlying water column. This finding can be a useful guide for future studies on the acidification of surrounding water due to shallow water CO₂ leakage.

Although the IPCC has recognized the potential of ocean CO₂ storage, it also noted its local risks that may arise as mentioned above [6]. With the above ecological and environmental concerns, more studies in this area need to be conducted to establish its

feasibility and long term effect on marine ecosystem before it can be fully implemented.

7.5. In-situ carbonation

Injected CO₂ reacts with the surrounding host rock and, in the presence of specific minerals, may generate carbonates [153]. This process may occur within mafic and ultramafic rocks such as basalts and Ophiolite suites [154]. Basalts are the most widely diffused rocks on the planet covering large areas of the continents and the oceans seafloor. Their potential for CO₂ storage is therefore very high even if technical issues and a limited knowledge of their stratigraphic setting at the level of details required for identifying the injection areas and their effective reactivity with CO₂ still limit their use [155,156].

8. Life cycle GHG assessment

The principal aim of CCS technologies is to reduce the CO₂ emissions from anthropogenic sources to the atmosphere. Most of the processes associated with CCS described in the previous sections would require the construction of infrastructure and installation of facilities (such as scrubbers, compressors and pipelines), additional use of chemicals (such as amine, hydroxide or zirconate), solid waste and wastewater disposal, etc. Energy would also be required for manufacturing, transporting, installing and operating of these facilities, and for producing chemicals, and thus, resulting in CO₂ emissions. Therefore, it is necessary to carry out a life cycle analysis (LCA) on GHG to determine whether or not a particular CCS technology can result in a net reduction in CO₂. This analysis is important, particularly for formulation of relevant CCS policy of a country. The Directive 2009/31/EC and the associated Guidance Document 1 is an example of how Europe is assessing the CO₂ Storage Life Cycle Risk Management [157].

Several LCA studies have been conducted regarding CCS, but mainly on coal-fired power plants and only including the capture unit [158–161]. Pehnt and Henkel [160] found that while there is an increase in cumulative energy demand for CCS, a substantial decrease in GHG emission is found for all the existing CO₂ capture approaches (i.e. post-combustion, pre-combustion, oxyfuel), as well as transport and storage in a depleted gas field. Odeh and Cockerill [159] conducted a LCA on the GHG emission of three types of fossil fuel power plants with and without CCS. They found that with a 90% CO₂ capture efficiency, life cycle GHG emissions are reduced by 75–84%. They also concluded that the global

warming potential is reduced when monoethanol amine (MEA) based CO₂ capture system is employed. Khoo and Tan [158] carried out a detailed LCA on four CO₂ recovery technologies, namely chemical absorption, membrane separation, cryogenics and pressure swing adsorption, combined with nine CO₂ sequestration systems including six options of ocean sequestration (i.e. vertical injection, inclined pipe, pipe towed by ship, dry ice and gas lift advanced dissolution), and three types of geological sequestration (i.e. EOR, ECBM and saline aquifer). They found that the three geological storage methods induced the least environmental burdens and the deep saline aquifer option (Sleipner project with CO₂ storage in the Utsira formation as an example) was the best case scenario, while the ECBM combined with chemical absorption produced the most promising environmental benefit due to its capability to prevent resource depletion. Recently, Singh et al. [162] conducted a LCA of a natural gas combined cycle power plant and found similar GHG reductions as those reported by Odeh and Cockerill [159]. However, a trade-off with other environmental impacts such as acidification, eutrophication and toxicity were found.

9. CO₂ leakage and monitoring

One of the important aspects for geological storage is the potential leakage of the stored CO₂ that would impair the effectiveness of the CO₂ confinement and eventually lead to serious consequences on the surrounding environments, such as acidification and pollution induced by the mobilization of heavy metals [163]. Therefore, studies on leakage/risk assessment have also attracted much attention in CCS studies.

9.1. Potential leakages

There are two possible sources of CO₂ leakage: CO₂ transport facilities or the storage area. Several studies have been conducted to identify the effect of the atmospheric dispersion of CO₂ due to leakage during transportation [164–166]. Dispersion models are normally used to study the plume dispersion due to a particular atmospheric condition and for assessing its effect to the environment. Comparatively, leakage from geological storage areas involves more complex situations and a number of studies have been conducted to assess this issue. There are two common sources of leakage from geological formations: leakage through caprock and leakage through permeable pathways. Normally the leakage through caprock will be slow and may take tens of thousands of years [167], while the leakage through permeable pathways can be faster causing more concerns to the operator [168]. Several studies have been conducted to model the effect of geological CO₂ leakage [169–172]. Celia et al. [173] discussed some available analytical and numerical models, and data needed for estimation of CO₂ leakage from geological sites. Nordbotten et al. [174] developed a semi-analytical solution for estimating CO₂ leakage from injection well, leaky well, and multiple aquifers separated by impermeable aquitards. This served as a foundation for the later development of a novel framework for predicting the leakage from a large number of abandoned wells, and forming leakage paths connecting multiple subsurface permeable formations [175].

Investigations of gas leakage through the cap rock have been conducted by many researchers [176–178]. Li et al. [178] found that the cap rock sealing pressure should be determined before the start of the process, and should not be exceeded during the CO₂ injection process to avoid CO₂ migration to upper formations which could be more permeable allowing the CO₂ to seep into

the surrounding environment and, eventually, back to the atmosphere.

Wells (injection and abandoned) have been identified as the most probable leakage pathway. Therefore, maintaining the well-bore integrity is imperative to guarantee the isolation of geological formations, particularly in basins with a history of oil and gas exploration and production [179].

There are studies regarding the effects of CO₂ leakage on human beings [180], plants [181] and marine ecosystems [148,172,182–184]. Due to the important consequences and effects of leakage on our environment, adequate monitoring is necessary in order to establish its potential long term effects on human and our environment, as described in the next section.

9.2. CO₂ monitoring

The key feature for geological storage is that CO₂ will be retained for extremely long periods, of the order of magnitude of 10³ year, without any appreciable seepage back to the surface. Models show that a leakage rate above 0.1% per year will invalidate the effectiveness of CCS in global warming control [185]. Moreover, migration of the injected CO₂ inside the storage volume should be monitored to assess that it will not interfere with the surrounding environment and in particular with the groundwater.

The monitoring strategy includes pre-injection, during injection and post-injection phases utilizing a suite of techniques aimed to assure the integrity of the reservoir, the absence of leakages, the quantification of the volumes of the stored CO₂ and the identification of the geometry of the injected plume of CO₂. Monitoring is also a key to verify the project's aims, including its predicted performance and long term containment.

The variety of monitoring techniques can be grouped into several families, each one having its range of application in function of the data to be acquired and of the environmental condition of the storage area, as shown in Table 9.

Seismic monitoring: Both active and passive systems can be employed. For active seismic, an energy source is used to generate acoustic waves, which will be detected and interpreted to gain information about the underground geology of the storage area; while in passive seismic, the tremors and micro-earthquakes generated by the movement of fluids or by the formation of fractures are recorded by geophones. When used during the pre-injection phase these methods are aimed to identify the characteristics of the storage area and its structural integrity. During the injection and post-injection, seismic is applied to the monitoring of the evolution of the CO₂ plume. 3D seismic generates a tri-dimensional image of the underground structures including the dimension of the injected plume of CO₂; time lapse or 4D monitoring is used to track the evolution through the time of the CO₂ plume [186,187]. High quality 3D is able to identify CO₂ bodies of mass above 10⁶ kg at depths of 1–2 km with optimal results in off-shore monitoring where the presence of water as medium enhances the penetration of the seismic waves [187].

Geoelectrical methods: These are based on the variation of resistivity caused by the presence of CO₂. When CO₂ displaces fluids with higher conductivity, i.e. brines, the induced variation in resistivity can be measured giving information about the grade of CO₂ saturation of the reservoir and the spatial distribution of the injected plume. The bigger the difference in conductivity between CO₂ and displaced fluids, the stronger is the signal. Once CO₂ is dissolved in water the difference in resistivity will drop below appreciable values, and therefore, this method is only valid for monitoring free CO₂ before dissolution [188].

Temperature logs: A range of thermal processes are involved in CO₂ injection (i.e. Joule–Thomson cooling, advective heat transfer,

Table 9
Main monitoring tools applied in some of CCS demonstration projects.

Methods	Sleipner	Frio	Nagaoka	Ketzin	In-Salah	Otway Basin	Weyburn
3D seismic	X		X	X	X	X	
4D seismic				X			
Micro-seismic	X		X				X
Vertical seismic profiling		X					
Gravimetry	X				X		X
Cross-hole electro-magnetical		X		X	X		
Pressure and temperature		X	X	X			
Geochemical sampling		X	X			X	X
Soil-gas		X			X		X
Tracers		X			X	X	
Atmospheric monitoring						X	
Microbiology				X			
Core sampling							X
InSar					X		

heat transport) causing changes in temperature around the CO₂ plume. Monitoring the variation in temperature can help in identifying the flow paths inside the reservoir. For more reliable results mathematical models can be developed based on the geology of the storage area, the volumes of injected CO₂ and its interaction with the surrounding fluids [189].

Gravimetry methods: Changes in underground density due to the injection of CO₂ can be detected by small perturbation in the local gravitational field; a loss in density is observed when CO₂ displaces denser brine inside the reservoir. Monitoring these changes gives information on the diffusion rate of CO₂. Limits are due to the distance between the gravimetric meters and the plume. The shape of the plume also affects the results, with vertically elongated plumes generating a stronger signal than flat spread ones [187].

Remote sensing: The injection of large volumes of fluids in the reservoir, mostly when the hydraulic conductivity is not very high, can generate a certain degree of overpressure leading to deformation of the surface that can be detected by Interferometric Synthetic Aperture Radar (InSAR) airborne or satellite monitoring. This method is based on the use of synthetic aperture radar to map the surface of the storage area through the time identifying the displacements. The injection of 3 Mt CO₂ in the In Salah Gas Field (Algeria) caused a lifting of 5 mm/y which was detected by InSAR [190].

Geochemical sampling: It is possible to collect samples of fluids from boreholes inside the storage area and observe the chemical variation induced by the injection of CO₂. The most evident effect is a drop in pH and changes in the concentration of minerals, such as carbonates and some silicates, due to the acidification. Measuring the pH drop in groundwater allows the identification of CO₂ leakages of the order of 10³ t/year [191]. Dissolved gas analysis is also a reliable tool for the quantification of the presence of CO₂ in the formation fluids and to track the migration of the CO₂ plume [192].

Atmospheric monitoring: CO₂ could seep from the reservoir and reach the surface, leaking into the atmosphere. Monitoring the atmospheric concentration of CO₂ in the storage area can be used to identify anomalies above the natural baseline. Large natural variation in CO₂ values due to soil respiration, organic matter decomposition or peculiar climatic condition may affect the reliability of these techniques [144].

Tracers: Co-injection of specific compounds together with CO₂ can generate a specific “fingerprint” of the stored CO₂. These tracers can be detected even in very small concentration (ppm) allowing an identification of any seepage from the reservoir. SF₆ and CH₄ have been used as tracers in the storage of CO₂ inside a depleted natural gas field and their presence was identified in samples collected from a monitoring well 700 m from the injection point about 150 days after the beginning of the injection, thus giving an estimate of the diffusivity of the CO₂ inside the reservoir [191].

Soil gas: Monitoring the composition of the soil gas, and in particular the concentration of CO₂, before the injection defines the baseline. Time lapse monitoring can be used during the injection and post-injection phases to assure the absence of CO₂ seepage [192].

Microbiology: Samples of fluids and sediments can be collected before the injection for a baseline on biocenosis to be compared with the modification induced by the presence of CO₂. Biological analysis is useful to identify biogeochemical processes which can affect the diffusion of CO₂ within the reservoir [193].

10. Barriers and opportunities for commercial deployment

CCS is considered to be a crucial part of worldwide efforts to combat global warming by reducing greenhouse gas emission. It was estimated that about 100 CCS projects need to be implemented by 2020 and over 3000 by 2050 in order to reach the goal of restoring the global temperature by 2 °C [194]. Although some of the technologies regarding CCS have been proven, comprehensive CCS projects involving large scale capture and storage are not operational. According to the Global CCS Institute's 2012 project survey 73 large scale integrated CCS projects have been identified around the world, only 15 of them are currently operating or in construction, capturing 35.4 Mt CO₂ per year, and the rest of the projects are in the planning stage of development [21]. It has been noted that five power generation CCS projects were removed from the Institute's 2011 listing.

IEA [165] pointed out a number of barriers of implementation of CCS, and recommended rules and standards for the transport and storage of CO₂ as follows [31]:

- Lack of a market mechanism/incentive that is sufficiently large and long term enough to reward an entity with carbon reduction using CCS technologies;
- No mechanism to penalize those major CO₂ emitting sources;
- Inadequate legal framework allowing transport and geological storage of CO₂ for both inland and offshore storage;
- Most of the current storage practices/demonstration projects are related to EOR or ECBM, which are more financially viable but have limited CO₂ storage capacity as compared to ocean and deep saline aquifers; demonstration in the latter two technologies need to be enhanced.

More recently DECC [195] identified a series of key points through the CCS chain to make its development an economically feasible solution:

- Identification of reliable storage sites with capability of switching between the sites in case a backup is needed;
- Use clusters of storage sites as “hubs” where different CO₂ sources can be delivered thus reducing the cost by sharing the infrastructures;
- Develop a large scale network of pipelines with reduction of the transport costs following the increasing of the transported volumes;

- Scaling up the CCS projects;
- Reduction in the energy penalty associated with capturing CO₂ from power plants;
- Assuring financial stability to the CCS projects by a regulatory and policy framework;
- Further explore the effectiveness of EOR in offsetting part of the costs associated with CCS;
- Identify other CO₂ sources than power generation which can be used for CCS.

There are no major technological barriers to the capture and geological storage of CO₂ for existing operation but noted that CCS is an energy intensive process that lowers the overall efficiency of the concerned energy/power generating systems. It is inevitable that the costs, both capital and operation, involved in plants equipped with CCS are much higher than those without capture due to the reduction in efficiency and additional capital cost for installing the capture, transport and injection facilities. The high cost of CO₂ capture, particularly for dilute streams like those from gas-fired power plants and industrial combustion processes is the major challenge of CCS [171]. Page et al. [196] compared the energy for CCS and efficiency penalty for different types of power plants and found that there are wide variations even for the same type of power plants. Part of the costs associated with CCS could be offset by using the CO₂ for economically productive application. EOR/ECBM in USA may allow the storage of up to 10,500 MtCO₂ generating revenue which should exceed the CCS costs; 78% of this low cost EOR is estimated to be used within a 20 years' time. In China 5500 MtCO₂ can be used for 99% EOR within the first 20 years. Further 2000–2,500 MtCO₂ may be transported and stored at an average cost of 4.89 USD/tonne CO₂ for USA and 4.51 USD/tonne CO₂ for China. Adding the capture phase the overall cost will be increased from 40 USD/tonne CO₂ up to 70 USD/tonne CO₂ in China [197,198]. Considering CCS applied to power plants the cost of capture in USA will range from 4.5 USD/tonne CO₂ for coal based integrated gasification combined cycle power plant with EOR to 72.4 USD/tonne CO₂ for natural gas combined cycle with storage in saline formations [199].

Estimates of the total cost associated with CCS for electricity production are in the range of 60–100 USD/tonne CO₂; the recent reduction in price of natural gas is leading to lower cost for gas-fired power plants if compared with coal-fired ones [200]. In general, the cost of CO₂ capture is ~70–80% of the total costs of a carbon capture, transport and storage system [6,32]. Therefore, significant research efforts are underway to reduce the costs of capture. On the other hand study indicated that the cost of CO₂ avoided is from 23 to 92 USD for coal plants and from 67 to 106 USD for natural gas plants, which are much higher than other renewable energy technologies such as hydropower and onshore wind farms [89]. However, study indicated that with increased R&D and accumulation of experience in CCS technologies, the cost of CCS can be reduced by 50% between 2008 and 2020 [201].

A general bias of cost estimates in CCS is their large range of uncertainty, mostly due to the fact that so far no large scale power plant with integrated CCS is operating. The cost of the avoided CO₂ will also vary between the retrofitting of an existing power plant and a new one with built-in CCS; the retrofitting costs being higher mostly when considering coal-fired electricity generation. Moreover, a real reduction in atmospheric injection of CO₂ will be fully achieved only if a new CCS-equipped power plant is going to replace an older one. The development of a CO₂ tax aimed to penalize the CO₂ emitters will also play an important role in the overall cost estimates. Any cost comparison should be therefore carefully and critically addressed [202,203]. Kenney and Basu [204] identified a number of challenges that could hinder the

achievement of a strategy for CO₂ reduction and highlight the importance of incentives to entice the engagement of countries.

Although much of the current discussion on CCS is focused on coal, a recent report by Green-Alliance [205] indicated that CCS could potentially be fitted on 50–100 GW of gas-fired capacity in Europe by 2030 with suitable policy action. Similarly, significant less attention has been paid to CCS for non-power applications, such as cement, steel and refinery, and hence there is relatively less knowledge about the required instrumentation and infrastructures for the deployment of CCS in the industrial sector [206,207].

Apart from conventional carbon capture and storage methods, there is increasing interest in some innovative ways of carbon reduction such as using biochar and biological CO₂ mitigation. Biochar (produced from pyrolysis of biomass) production and storage in soils can provide simultaneous benefits for carbon sequestration, provision of energy and soil conditioning that can restore degraded agricultural land and increase crop yields [208,209]. Its role for carbon sequestration was included in the Agenda for the 2009 UNFCCC Copenhagen climate change negotiations. In recent years microalgae has emerged as a promising option for biological CO₂ fixation and intensive research has been carried out to develop feasible systems for removing CO₂ from industrial exhaust gases. Lenton [210] conducted a review on land-based biological CO₂ removal and storage methods including biochar production and bioenergy with CO₂ capture and storage. The review suggests that there is already the potential to counterbalance land use change CO₂ emissions and by the end of the century, CO₂ removal could exceed CO₂ emissions, thus lowering atmospheric CO₂ concentration and global temperature. Although the above innovative mitigation technologies and measures may be able to break some of the barriers for commercial deployment of CCS systems, further R&D is needed on the optimal implementation plan and system.

11. Conclusions

In order to meet GHG emissions reduction target, a complementary range of technological approaches, including improving energy efficiency and conservation, adopting clean fuels and clean coal technologies, developing renewable energy, and implementing CCS, has been considered by various countries according to their own circumstances. It is noted that CCS comprises a portfolio of technologies that can massively reduce CO₂ emissions, but CCS is yet to be widely deployed. This paper has reviewed various technologies and issues related to CO₂ capture, separation, transport, storage and monitoring. The selection of specific CO₂ capture technology heavily depends on the type of the plant and fuel used, where for gas-fired power plants, post-combustion capture technology was found generally to be the technology due to its lower cost. Absorption is the most mature CO₂ separation process, due to its high efficiency and lower cost; although issues related to environmental impact have to be fully understood.

The best option for CO₂ transport will depend on a variety of parameters including:

- Volumes of CO₂ to be transported;
- Planned lifetime of the CO₂ source (e.g. power plants, steel and cement factories);
- Distance between CO₂ source and storage area;
- Onshore vs. offshore transport and storage;
- Typology of transporting infrastructure available (i.e. road and rail networks, pipelines trunks, shipping docks facilities).

Pipeline is considered to be the most viable solution if large volumes of CO₂ are available for long time and if a trunk of

pipelines can be developed; further advantage is represented by the potential reuse of pipelines for gas or oil transport. In case of offshore storage shipping the CO₂ by tankers can be economically competitive due to the high capital costs involved in the deployment of submarine pipelines. The costs of intermediate storage facilities and suitable docking for the tankers should be addressed when ships are used as CO₂ carriers.

Four main types of geological formations are considered for CO₂ storage:

- Depleted oil and gas reservoirs;
- Unmineable coal beds;
- Saline aquifers;
- Basalts.

In case of storage in oil and gas reservoir the technology already used for enhanced oil recovery (EOR) is mature and has been practiced for many years using natural CO₂ sources and mostly on-shore. However, the economical feasibility of using captured CO₂ from anthropogenic sources for EOR has not been fully demonstrated yet mostly for offshore storage. The use of unmineable coal beds, eventually recovering methane by Enhanced Coal Bed Methane (ECBM) recovery, can be an option but it will make the coal used for CO₂ storage unavailable even if future mining technology and economical consideration should make it of commercial value. On the other hand, there are growing interests in CO₂ storage in saline aquifers, due to their enormous potential storage capacity and several projects are in development both onshore and offshore. Basalts represent an extremely large volume for CO₂ storage which will be fixed as carbonate minerals following chemical reaction with the minerals of the hosting rocks. A number of uncertainties ranging from the need of an extremely detailed knowledge of the stratigraphic structure of the basalts to fully understanding of the chemical reaction still limit their use.

Potential CO₂ leakage is a major concern for geological storage and a comprehensive monitoring program needs to be developed. A number of monitoring technologies have been described in this paper to be applied according to the special environmental conditions of the storage site.

Although technologies regarding the capture and storage of CO₂ exist, the overall cost of using current CCS procedures is still high and must be substantially reduced before it can be widely deployed. There are multiple hurdles to CCS deployment that need to be addressed in the coming years, including the absence of a clear business case for investment in CCS, and the absence of robust economic incentives to support the additional high capital and operating costs associated with CCS.

Acknowledgments

The first author would like to acknowledge the support of ACU for providing the Titular Fellowship for this study. Support from the Center for Innovation in Carbon Capture and Storage (Engineering and Physical Sciences Research Council grant EP/F012098/1 and EP/F012098/2) is gratefully acknowledged.

References

- [1] Emission database for global atmospheric research EDGAR, European Commission. (<http://edgar.jrc.ec.europa.eu/overview.php?v=CO2ts1990-2011>).
- [2] IPCC fourth assessment report: climate change 2007 (AR4) from IPCC website [(http://ipcc.ch/publications_and_data/publications_and_data_reports.shtml/); 2007].
- [3] NOAA, National oceanic and atmospheric administration, (<http://www.esrl.noaa.gov/gmd/ccgg/trends/>); 2013.
- [4] IPCC. Special report on emissions scenarios: a special report of working group III of the Intergovernmental Panel on Climate Change. New York: Cambridge University Press; 92-9169-1135.
- [5] IPCC fourth assessment report: climate change 2013 (AR5) from IPCC website (http://ipcc.ch/publications_and_data/publications_and_data_reports.shtml/); 2013.
- [6] IPCC. Special report on carbon dioxide capture and storage. New York: Cambridge University Press; 2005 (ISBN:92-9169-1190-4).
- [7] Khesghi H, de Coninck H, Kessels J. Carbon dioxide capture and storage: seven years after the IPCC special report. *Mitig Adapt Strat Glob Change* 2012;17-6:563–7.
- [8] Knoope MMJ, Ramirez A, Faaij APC. A state of the art review of techno-economic models predicting the costs of CO₂ pipeline transport. *Int J Greenh Gas Control* 2013;16:241–70.
- [9] Lv YX, Xu CQ, Yan GH, Guo DY, Xiao Q. A review on CO₂ capture using membrane gas absorption technology. *Adv Mater Res* 2012;616–618:1541–5.
- [10] Maroto-Valer MM, editor. Developments and innovation in carbon dioxide (CO₂) capture and storage technology, 2 volumes. New York. ISBN: 978-1-4398-3099-4 (V1) and 978-1-84569-797-6 (V2).
- [11] Prelicz RM, Mackie EAV, Otto CJ. Methodologies for CO₂ storage capacity estimation: review and evaluation of CO₂ storage. *First Break* 2012;30/2:70–8.
- [12] Thomas L, Schneider M, Winkler A. Threats to the quality of water resources by geological CO₂ storage: hydrogeochemical and other methods of investigation: a review. (The Handbook of Environmental Chemistry 2013). In: Scozzari A, Dotsika E, editors. Threats to the quality of groundwater resources: prevention and control; 2013.
- [13] Yang HQ, Xu Z, Gupta R, Slimane RB, Bland AE, Wright I. Progress in carbon dioxide separation and capture: a review. *J Environ Sci* 2008;20:14–27.
- [14] Blomen E, Hendriks C, Neele F. Capture technologies: improvements and promising developments. *Energy Procedia* 2009;1:1505–12.
- [15] Wall TF. Combustion processes for carbon capture. In: Proceedings of the combustion institute, vol. 31; 2007. p. 31–47.
- [16] de Visser E, Hendricks C, Barrio M, Molnvik MJ, de Koeijer G, Liljemark S, et al. Dynamics CO₂ quality recommendations. *Int J Greenh Gas Control* 2008;2:478–84.
- [17] ICF. Developing a pipeline infrastructure for CO₂ capture and storage; issues and challenges. Technical report prepared for INGAA Foundation. 2009 (106 pp.).
- [18] Olajire AA. CO₂ capture and separation technologies for end-of-pipe application – a review. *Energy* 2010;35:2610–28.
- [19] Elwell LC, Grant WS. Technology options for capturing CO₂ – special reports. *Power* 2006;150:60–5.
- [20] Kanniche M, Gros-Bonnivard R, Jaud P, Valle-Marcos J, Amann JM, Bouallou C. Pre-combustion, post-combustion and oxy-combustion in thermal power plant for CO₂ capture. *Appl Therm Eng* 2010;30:53–62.
- [21] Global CCS Institute. Global status of large scale integrated projects: June 2012 update. (<http://cdn.globalccsinstitute.com/sites/default/files/publications/41146/globalstatusoflargescaleintegratedprojectsjune2012update.pdf>); 2012a.
- [22] Global CCS Institute. CO₂ capture technologies: precombustion with CO₂ capture: January 2012b. (<http://cdn.globalccsinstitute.com/sites/default/files/publications/29756/co2-capture-technologies-pre-combustion-capture.pdf>); 2012b.
- [23] Nord LO, Anantharaman R, Bolland O. Design and off-design analyses of a pre-combustion CO₂ capture process in a natural gas combined cycle power plant. *Int J Greenh Gas Control* 2009;3:385–92.
- [24] Hoffmann S, Bartlett M, Finkenrath M, Evulet A, Ursin TP. Performance and cost analysis of advanced combined cycles with precombustion CO₂ capture. *J Eng Gas Turbines Power* 2009;131 (021701-1 to 7).
- [25] Buhre BJP, Elliott LK, Sheng CD, Gupta RP, Wall TF. Oxy-fuel combustion technology for coal-fired power generation. *Prog Energy Combust Sci* 2005;31:283–307.
- [26] Zero, Zero Emissions Resource Organization, (<http://www.zeroCO2.no>); 2013.
- [27] Pfaffl I, Kather A. Comparative thermodynamic analysis and integration issues of CCS steam power plants based on oxy-combustion with cryogenic or membrane based air separation. *Energy Procedia* 2009;1:495–502.
- [28] Burdyny T, Struchtrup H. Hybrid membrane/cryogenic separation of oxygen from air for use in the oxy-fuel process. *Energy* 2010;35:1884–97.
- [29] Global CCS Institute. CO₂ capture technologies: oxycombustion with CO₂ capture: January 2012. (<http://cdn.globalccsinstitute.com/sites/default/files/publications/29761/co2-capture-technologies-oxy-combustion.pdf>); 2012c.
- [30] Bhowan AS, Freeman BC. Analysis and status of post-combustion carbon dioxide capture technologies. *Environ Sci Technol* 2011;45:8624–32.
- [31] Gibbins J, Chalmers H. Carbon capture and storage. *Energy Policy* 2008;36:4317–22.
- [32] International Energy Agency Report. Capturing CO₂. IEA Greenhouse Gas R&D Programme 2007 isbn:978-1-898373-41-4; 2007.
- [33] Hendriks C. Energy conversion: CO₂ removal from coal-fired power plant. Netherlands: Kluwer Academic Publishers; 1995.
- [34] Veawab A, Aroonwilas A, Tontiwachwuthiku P. CO₂ absorption performance of aqueous alkanolamines in packed columns. *Fuel Chem Div P Repr* 2002;47:49–50.
- [35] Aaron D, Tsouris C. Separation of CO₂ from flue gas: a review. *Sep Sci Technol* 2005;40:321–48.

- [36] Knudsen JN, Jensen JN, Vilhelmsen PJ, Biede O. Experience with CO₂ capture from coal flue gas in pilot-scale: testing of different amine solvents. *Energy Procedia* 2009;1:783–90.
- [37] Gurkan BE, de la Fuente FC, Mindrup EM, Ficke LE, Goodrich BF, Price EA, et al. *J Am Chem Soc* 2010;132:2116–7.
- [38] Bougie FF, Iliuta MC. CO₂ absorption in aqueous piperazine solutions: experimental study and modeling. *J Chem Eng Data* 2011;56:1547–54.
- [39] Rochelle GT. Thermal degradation of amines for CO₂ capture. *Curr Opin Chem Eng* 2012;1–2:183–90.
- [40] Fredriksen SB, Jens KJ. Oxidative degradation of aqueous amine solutions of MEA, AMP, MDEA, Pz; a review. *Energy Procedia* 2013;37:1770–7.
- [41] da Silva CF, Dias APB, Santana APR, Pizzo JS, de Souza FM, Lazarin AM, et al. Intercalation of amines into layered calcium phosphate and their new behavior for copper retention from ethanolic solution. *Open J Synth Theory Appl* 2013;2:1–7.
- [42] Kozak F, Petig A, Morris E, Rhudy R, Thimsen D. Chilled ammonia process for CO₂ capture. *Energy Procedia* 2009;1:1419–26.
- [43] Takamura Y, Narita S, Aoki J, Uchida S. Application of high-PSA process for improvement of CO₂ recovery system. *Can J Chem Eng* 2001;79:812–6.
- [44] McKee B. Solutions for the 21st Century: zero emissions technology for fossil fuels. France: IEA, Com. Energy Research and Technology. OECD/IEA; 2002.
- [45] Clause M, Merel J, Meunier F. Numerical parametric study on CO₂ capture by indirect thermal swing adsorption. *Int J Greenh Gas Control* 2011;5:1206–13.
- [46] Kulkarni AR, Sholl DS. Analysis of equilibrium-based TSA processes for direct capture of CO₂ from air. *Ind Eng Chem Res* 2012;51:8631–45.
- [47] Maroto-Valer MM, Lu Z, Zhang Y, Tang Z. Sorbents for CO₂ capture from high-carbon fly ashes. *Waste Manag* 2008;28:2320–8.
- [48] Olivares-Marín M, Maroto-Valer MM. Preparation of a highly microporous carbon from a carpet material and its application as CO₂ sorbent. *Fuel Process Technol* 2010;92:322–9.
- [49] Olivares-Marín M, Drage TC, Maroto-Valer MM. Novel lithium-based sorbents from fly ashes for CO₂ capture at high temperatures. *Int J Greenh Gas Control* 2010;4(4):623–9.
- [50] Olivares-Marín M, Maroto-Valer MM. Development of adsorbents for CO₂ capture from waste materials: a review. *Greenh Gases Sci Technol* 2012;2:20–35.
- [51] Ishida M, Yamamoto M, Ohba T. Experimental results of chemical looping combustion with NiO/NiAl₂O₄ particle circulation at 1200 °C. *Energy Convers Manag* 2002;43:1469–78.
- [52] Cho P, Mattisson T, Lyngfelt A. Reactivity of iron oxide with methane in a laboratory fluidized bed – application of chemical-looping combustion. In: Proceedings of the 7th international conference on circulating fluidized beds. Niagara Falls, Ontario; May 5–7, 2002. p. 599–606.
- [53] Brandvoll Ø, Bolland O. Inherent CO₂ capture using chemical looping combustion in a natural gas fired power cycle. *ASME J Eng Gas Turbines Power* 2004;126:316–21.
- [54] Adánez J, de Diego LF, García-Labiano F, Gayán P, Abad A, Palacios JM. Selection of oxygen carriers for chemical-looping combustion. *Energy Fuels* 2004;18:371–7.
- [55] Zafar Q, Mattisson T, Gevert B. Integrated hydrogen and power production with CO₂ capture using chemical-looping reforming-redox reactivity of particles of CuO, Mn₂O₃, NiO, and Fe₂O₃ using SiO₂ as a support. *Ind Eng Chem Res* 2005;44:3485–96.
- [56] Li F, Luo S, Sun Z, Bao X, Fan LS. Role of metal oxide support in redox reactions of iron oxide for chemical looping applications: experiments and density functional theory calculations. *Energy Environ Sci* 2011;4:3661–7.
- [57] Lyngfelt A, Leckner B, Mattisson T. A fluidized-bed combustion process with inherent CO₂ separation; application of chemical-looping combustion. *Chem Eng Sci* 2001;56:3101–13.
- [58] Lyngfelt A, Mattisson T. Materials for chemical-looping combustion. In: Stolten D, Scherer V, editors. Efficient carbon capture for coal power plants. Weinheim: Wiley-VCH Verlag GmbH & Co. KGaA; 2011. p. 475–504.
- [59] Adánez J, Abad A, García-Labiano F, Gayán P, de Diego L. Progress in chemical-looping combustion and reforming technologies. *Prog Energy Combust Sci* 2012;38:215–82.
- [60] Erlach B, Schmidt M, Tsatsaronis B. Comparison of carbon capture IGCC with pre-combustion decarbonisation and with chemical-looping combustion. *Energy* 2011;36:3804–15.
- [61] Rackley SA. Carbon capture and storage. Burlington, USA: Butterworth-Heinemann, Elsevier; 2010.
- [62] Audus H. Leading options for the capture of CO₂ at power stations. In: Proceedings of the 5th international conference on greenhouse gas control technology. Cairns, Australia; August 13–16, 2000.
- [63] Gielen D. Energy policy consequences of future CO₂ capture and sequestration technologies. In: Proceedings of the 2nd annual conference on carbon sequestration. Alexandria, VA; May 5–8, 2003.
- [64] Yave W, Car A, Funari SS, Nunes SP, Peinemann KV. CO₂-philic polymer membrane with extremely high separation performance. *Macromolecules* 2009;43:326–33.
- [65] Brunetti A, Scura F, Barbieri G, Drioli E. Membrane technologies for CO₂ separation. *J Membr Sci* 2010;359:115–25.
- [66] Bernardo P, Drioli E, Golemme G. Membrane gas separation: a review/state of the art. *Ind Eng Chem Res* 2009;48:4638–63.
- [67] Fan S, Wang Y, Lang X. CO₂ capture in form of clathrate hydrate—problem and practice. In: Proceedings of the 7th international conference on gas hydrates (ICGH 2011), UK; July 17–21, 2011.
- [68] Englezos P, Ripmeester JA, Kumar R, Linga P. Hydrate processes for CO₂ capture and scale up using a new apparatus. In: Proceedings of the international conference on gas hydrates, ICGH; 2008.
- [69] Zhang Y, Yang M, Song Y, Jiang L, Li Y, Cheng C. Hydrate phase equilibrium measurements for (THF + SDS + CO₂ + N₂) aqueous solution systems in porous media. *Fluid Phase Equilib* 2014;370:12–8.
- [70] Babu P, Kumar R, Linga P. Progress on the hydrate based gas separation (HBGS) process for carbon dioxide capture. AICHE annual meeting. San Francisco, USA; 3–8 November 2013.
- [71] Sun D, Englezos P. Storage of CO₂ in a partially water saturated porous medium at gas hydrate formation conditions. *Int J Greenh Gas Control* 2014;25:1–8.
- [72] Gottlicher G, Pruscek R. Comparison of CO₂ removal systems for fossil fuelled power plants. *Energy Convers Manag* 1997;38:S173–8.
- [73] Burt SS, Baxter A, Bence C, Baxter LL. Cryogenic CO₂ capture for improved efficiency at reduced cost. In: Proceedings of the AICHE 2010 annual meeting; November 7–12, 2010.
- [74] Tuinier MJ, Annaland MVS, Kramer GJ, Kuipers JAM. Cryogenic CO₂ capture using dynamically operated packed beds. *Chem Eng Sci* 2010;65:114–9.
- [75] Besong M, Maroto-Valer MM, Finn A. Study of design parameters affecting the performance of CO₂ purification units in oxy-fuel combustion. *Int J Greenh Gases* 2013;12:441–9.
- [76] Aspelund A, Molnvik MJ, De Koeijer G. Ship transport of CO₂, technical solutions and analysis of costs, energy utilization, energy efficiency and CO₂ emissions. *Chem Eng Res Des* 2006;84(A9):847–55.
- [77] Svensson R, Odenberger M, Johnsson F, Stromberg L. Transportation systems for CO₂ – application to carbon capture and storage. *Energy Convers Manag* 2004;45:2343–53.
- [78] Norisor M, Badea A, Dinca C. Economical and technical analysis of CO₂ transport ways. *U.P.B. Sci Bull Series C* 2012;74(1):127–38.
- [79] Gao L, Fang M, Li H, Hetland J. Cost analysis of CO₂ transportation: case study in China. *Energy Procedia* 2011;4:5974–81.
- [80] Johnsen K, Helle K, Roneid S, Holt H. DNV recommended practice: design and operation of CO₂ pipelines. *Energy Procedia* 2011;4:3032–9.
- [81] Forbes SM, Verma P, Curry TE, Friedmann SJ, Wade SM. Guidelines for carbon dioxide capture, transport, and storage. *World Resour Inst* 2008 20113082154 (144 pp.).
- [82] International Energy Agency Report. CO₂ pipeline infrastructure: an analysis of global challenges and opportunities. Element Energy Limited. Final Report. 2010 (134 pp.).
- [83] FEED. CO₂ transport pipeline. Except for public use. Vattennfal Europe. Job n. P10111; 2011. 143 pp.
- [84] Gale J, Davison J. Transmission of CO₂-safety and economic considerations. *Energy* 2004;29:1319–28.
- [85] Parfomak PW, Folger P, Vann A. Carbon dioxide (CO₂) pipelines for carbon sequestration: emerging policy issues. Congressional research service report. 2009 (21 pp.).
- [86] Chandel MK, Pratson LF, Williams E. Potential economies of scale in CO₂ transport through use of a trunk pipeline. *Energy Convers Manag* 2010;51:2825–2834.
- [87] Rabimdran P, Cote H, Winning IG. Integrity management approach to reuse of oil and gas pipelines for CO₂ transportation. In: Proceedings of the 6th Pipeline Technology Conference. Hannover Messe, Hannover, Germany; 04–05 April 2011.
- [88] DNV. Design and operation of CO₂ pipelines. Det Norske Veritas. Recommended Practice DNV-RP-J202; 2010. 42 pp.
- [89] Global CCS Institute (2012). The Global Status of CCS. Canberra, Australia; 2012. 228 pp.
- [90] Kikuchi R. CO₂ recovery and reuse in the energy sector, energy resource development and others: economic and technical evaluation of large-scale CO₂ recycling. *Energy Environ* 2003;14:383–95.
- [91] Dooley JJ, Davidson CL, Dahowski RT. An assessment of the commercial availability of carbon dioxide capture and storage technologies as of June 2009. Report for the US Department of Energy under a contract no. DE-AC05-T6RL01830, PNNL-18520; 2009.
- [92] Aresta M, Dibenedetto A. Utilisation of CO₂ as a chemical feedstock: opportunities and challenges. *Dalton Trans* 2007;28:2975–92.
- [93] Oldenburg CM. Why we need the and in CO₂ utilization and storage, greenhouse gases: science and technology, 2/1; 2013. p. 1–2.
- [94] Oldenburg CM. Carbon dioxide as cushion gas for natural gas storage. *Energy Fuels* 2003;17:240–6.
- [95] Seifritz W. CO₂ disposal by means of silicates. *Nature* 1990;345:486.
- [96] Park AHA, Fan LS. CO₂ mineral sequestration: physically activated dissolution of serpentine and pH swing process. *Chem Eng Sci* 2004;59:5241–7.
- [97] Kodama S, Nishimoto T, Yamamoto N, Yogo K, Yamada K. Development of a new pH-swing CO₂ mineralization process with a recyclable reaction solution. *Energy* 2008;33:776–84.
- [98] Eloneva S, Said A, Fogelholm KJ, Zevenhoven R. Preliminary assessment of a method utilizing carbon dioxide and steelmaking slags to produce precipitated calcium carbonate. *Appl Energy* 2012;90:329–34.
- [99] Sanna A, Dri M, Hall MR, Maroto-Valer MM. Micro-silica for high-end application from carbon capture and storage by mineralisation. *Key Eng Mater* 2012;517:737–44.

- [100] Sanna A, Dri M, Hall MR, Maroto-Valer MM. Waste materials as a potential resource for carbon capture and storage by mineralisation (CCSM) in the UK context. *Appl Energy* 2012;99:545–54.
- [101] Dri M, Sanna A, Maroto-Valer MM. Dissolution of steel slag and recycled concrete aggregate in ammonium bisulphate for CO₂ mineral carbonation. *Fuel Process Technol* 2013;113:114–22.
- [102] Wang X, Maroto-Valer MM. Dissolution of serpentine using recyclable ammonium salts for CO₂ mineral carbonation. *Fuel* 2011;90:1229–37.
- [103] Wang X, Maroto-Valer MM. Integration of CO₂ capture and mineral carbonation by using recyclable ammonium salts. *ChemSusChem* 2011;4:1291–300.
- [104] Wang X, Maroto-Valer MM. Optimization of carbon dioxide capture and storage with mineralisation using recyclable ammonium salts. *Energy* 2013;2013(51):431–8.
- [105] Roy SC, Varghese OK, Paulose M, Grimes CA. Toward solar fuels: photocatalytic conversion of carbon dioxide to hydrocarbons. *ACS Nano* 2010;4/3:1259–78.
- [106] Liu Q, Maroto-Valer MM. Studies of pH buffer systems to promote carbonates formation for CO₂ sequestration in brines. *Fuel Process Technol* 2012;98:6–13.
- [107] Tan JZY, Fernandez Y, Liu D, Maroto-Valer MM, Bian JC, Zhang XW. Photoreduction of CO₂ using copper-decorated TiO₂ nanorod films with localized surface Plasmon behavior. *Chem Phys Lett* 2012;531:149–54.
- [108] Liou P-Y, Chen S-C, Wu JCS, Liu D, Mackintosh S, Maroto-Valer M, et al. Photocatalytic CO₂ reduction using an internally illuminated monolith photoreactor. *Energy Environ Sci* 2011;4:1487–94.
- [109] Tseng IH, Chang W-C, Wu JCS. Photoreduction of CO₂ using sol-gel derived titania and titania-supported copper catalysts. *Appl Catal B Environ* 2002;37:37–48.
- [110] Huang C, Yao W, Raissi AT, Muradov N. Development of efficient photoreactors for solar hydrogen production. *Sol Energy* 2011;85:19–27.
- [111] de la Calle A, Roca L, Yebra LJ, Dormido SN. Modeling of a two-step solar hydrogen production plant. *Int J Hydrog Energy* 2012;37:10549–56.
- [112] Usubharatana P, McMartin D, Veawab A, Tontiwachwuthikul P. Photocatalytic process for CO₂ emission reduction from industrial flue gas streams. *Ind Eng Chem Res* 2006;45/8:2558–68.
- [113] Celia MA, Nordbotten JM. Practical modeling approaches for geological storage of carbon dioxide. *Ground Water* 2009;47:627–38.
- [114] Van der Zwaan B, Smekens K. CO₂ capture and storage with leakage in an energy-climate model. *Environ Model Assess* 2009;14:135–48.
- [115] Yang F, Bai BJ, Tang DZ, Dunn-Norman S, Wronkiewicz D. Characteristics of CO₂ sequestration in saline aquifers. *Pet Sci* 2010;7:83–92.
- [116] Myer L. Global status of geologic CO₂ storage technology development. United States carbon sequestration council report July 2011. 2011.
- [117] Doughty C, Freifeld BM, Trautz RC. Site characterization for CO₂ geological storage and vice versa: the Frio brine pilot, Texas, USA as a case study. *Environ Geol* 2008;54:1635–56.
- [118] Solomon S, Carpenter M, Flach TA. Intermediate storage of carbon dioxide in geological formations: a technical perspective. *Int J Greenh Gas Control* 2008;2:502–10.
- [119] Bachu S. Sequestration of CO₂ in geological media: criteria and approach for site selection in response to climate change. *Energy Convers Manag* 2000;41:953–70.
- [120] International Energy Agency Report. Improvements in power generation with post-combustion capture of CO₂. IEA Greenhouse Gas R&D Programmes, PH4/33; 2004.
- [121] Blunt M, Fayers FJ, Orr FM. Carbon dioxide in enhanced oil recovery. *Energy Convers Manag* 1993;34:1197–204.
- [122] Vidiuk K, Cunha LB. A simulation study of effects of operational procedures in CO₂ flooding projects for EOR and sequestration. In: Proceedings of the Canadian international petroleum conference. Calgary, Alberta; June 12–14, 2007.
- [123] Chiamonte L, Zoback M, Friedmann J, Stamp V, Zahn C. Fracture characterization and fluid flow simulation with geomechanical constraints for a CO₂-EOR and sequestration project Teapot Dome Oil Field, Wyoming, USA. *Energy Procedia* 2011;4:3973–80.
- [124] Preston C, Moneab M, Jazrawi W, Brown K, Whittaker S, Whitee D, et al. IEA GHG Weyburn CO₂ monitoring and storage project. *Fuel Process Technol* 2005;86:1547–68.
- [125] Cantucci B, Montegrossi G, Vaselli O, Tassi F, Quattrocchi F, Perkins EH. Geomechanical modeling of CO₂ storage in deep reservoirs: the Weyburn Project (Canada) case study. *Chem Geol* 2009;265:181–97.
- [126] Klusman RW. Evaluation of leakage potential from a carbon dioxide EOR/sequestration project. *Energy Convers Manag* 2003;44:1921–40.
- [127] White CM, Strazisar BR, Granite EJ, Hoffman JS, Pennline HW. Separation and capture of CO₂ from large stationary sources and sequestration in geological formations—coalbeds and deep saline aquifers. *J AWMA* 2003;53:645–715.
- [128] Stenvens SH, Kuuskraa VA, Spector D, Riemer P. CO₂ sequestration in deep coal seams: pilot results and worldwide potential. In: Proceedings of the 4th international conference on greenhouse gas control technologies (GHGT). Inter-laken, Switzerland, August 30–September 2, 1998, Elsevier; 1999. p. 175–80.
- [129] Gunter WD. CO₂ sequestration in deep unmineable coal seams. In: Conference Proceedings; CAPP/CERI industry best practices conference; 2000. p. 1–19.
- [130] Kelafant JR, Stevens SH, Boyer II CM. Coalbed gas-2: vast resource potential exists in many countries. *Oil Gas J* 1992;90:80–5.
- [131] Fujioka M, Yamaguchi S, Nako M. CO₂-ECBM field tests in the Ishikari Coal Basin of Japan. *Int J Coal Geol* 2010;82:287–98.
- [132] Singh N. Deep saline aquifers for sequestration of carbon dioxide. In: International geological congress, Oslo; August 2008.
- [133] Garcia S, Kaminska A, Maroto-Valer MM. Underground carbon dioxide storage in saline formations. *Waste Resour Manag* 2010;163:77–88.
- [134] DoE US. Carbon sequestration research and development; DOE/SC/FE-1. Washington DC: U.S. Department of Energy; 1999.
- [135] Druckenmiller M, Maroto-Valer MM, Hill MA. Investigation of carbon sequestration via induced calcite formation in natural gas well brine. *Energy Fuels* 2006;20:172–9.
- [136] Liu Q, Maroto-Valer MM. Investigation of the pH effect of a typical host rock and buffer solution on CO₂ sequestration in synthetic brines. *Fuel Process Technol* 2010;91(10):1321–9.
- [137] Liu Q, Maroto-Valer MM. Parameters affecting mineral trapping of CO₂ sequestration in brines. *Greenh Gases Sci Technol* 2011;1(3):211–22.
- [138] Liu D, Fernandez Y, Ola O, Mackintosh S, Maroto-Valer MM, Parlett CMA, et al. On the impact of Cu dispersion on CO₂ photoreduction over Cu/TiO₂. *Catal Commun* 2012;25:78–82.
- [139] Szulczewski ML, MacMinn CW, Juanes R. Theoretical analysis of how pressure buildup and CO₂ migration can both constrain storage capacity in deep saline aquifers. *Int J Greenh Gas Control* 2014;23:113–8.
- [140] Arts R, Zweigel P, Lothe A. Reservoir geology of the Utsira Sand in the Southern Viking Graben area – a site for potential CO₂ storage. In: 62nd EAGE meeting, paper B-20. Glasgow; 2000.
- [141] Korboel R, Kaddour A. Sleipner Vest CO₂ disposal— injection of removed CO₂ into the Utsira formation. *Energy Convers Manag* 1995;36:509–12.
- [142] Kongsjorden H, Karstad O, Torp TA. Saline aquifer storage of carbon dioxide in the Sleipner Project. *Waste Manag* 1997;17:303–8.
- [143] Rai V, Chung NC, Thurber MC, Victor DG. PESD carbon storage project database. Working paper#76, The program on energy and sustainable development, Stanford University, Available at SSRN: (<http://ssrn.com/abstract=1400118>) or <http://dx.doi.org/10.2139/ssrn.1400118>; 2008.
- [144] Michael K, Golab A, Shulakova V, Ennis-King J, Allinson G, Sharma S, et al. Geological storage of CO₂ in saline aquifers – a review of the experience from existing storage operations. *Int J Greenh Gas Control* 2010;4:659–67.
- [145] Yamasaki A. An overview of CO₂ mitigation options for global warming – emphasizing CO₂ sequestration options. *J Chem Eng Jpn* 2003;36:361–75.
- [146] House KZ, Schrag DP, Harvey CF, Lackner KS. Permanent carbon dioxide storage in deep-sea sediments. *Proc Natl Acad Sci USA* 2006;103:12291–5.
- [147] Adam EE, Caldeira K. Ocean storage of CO₂. *Elements* 2008;4:319–24.
- [148] Seibel BA, Walsh PJ. Potential impacts of CO₂ injection on deep-sea biota. *Science* 2001;294:319–20.
- [149] Hall-Spencer JM, Rodolfo-Metalpa R, Martin S, Ransome E, Fine M, Turner SM, et al. Volcanic carbon dioxide vents show ecosystem effects of ocean acidification. *Nature* 2008;45:96–9.
- [150] Rodolfo-Metalpa R, Houlbrèque F, Tambutté É, Boisson F, Baggini C, Patti FP, et al. Coral and mollusc resistance to ocean acidification adversely affected by warming. (online 21 August 2011). *Nat Clim Change* 2011. <http://dx.doi.org/10.1038/NCLIMATE1200>.
- [151] Espa S, Caramanna G, Bouche V. Field study and laboratory experiments of bubble plumes in shallow seas as analogues of sub-seabed CO₂ leakages. *Appl Geochem* 2010;25:696–704.
- [152] Caramanna G, Wei Y, Maroto-Valer MM, Nathanail P, Steven M. Laboratory experiments and field study for the detection and monitoring of potential seepage from CO₂ storage sites. *Appl Geochem* 2013;30:105–13.
- [153] Oelkers EH, Gislason SR, Matter J. Mineral carbonation of CO₂. *Elements* 2008;4:5:333–7.
- [154] Matter JM, Kelemen PB. Permanent storage of carbon dioxide in geologic reservoirs by mineral carbonation. *Nat Geosci* 2009;2:837–41.
- [155] Goldberg DS, Kent DV, Olsen PE. Potential on-shore and off-shore reservoirs for CO₂ sequestration in Central Atlantic magmatic province basalts. *PNAS* 2010;107:1327–32.
- [156] Schaeff HT, McGrail BP, Owen AT. Carbonate mineralization of volcanic province basalts. *Int J Greenh Gas Control* 2010;4:249–61.
- [157] Directive 2009/31/EC. Guidance Document 1 CO₂ storage life cycle risk management framework; 2009.
- [158] Khoo H, Tan RBH. Life cycle investigation of CO₂ recovery and sequestration. *Env Sci Technol* 2006;40:4016–24.
- [159] Odeh NA, Cockerill TT. Life cycle GHG assessment of fossil fuel-power plants with carbon capture and storage. *Energy Policy* 2008;36:367–80.
- [160] Pehnt M, Henkel J. Life cycle assessment of carbon dioxide capture and storage from lignite power plants. *Int J Greenh Gas Control* 2009;3:49–66.
- [161] Schreiber A, Zapp P, Kuckshinrichs W. Environmental assessment of German electricity generation from coal-fired power plants with amine-based carbon capture. *Int J Life Cycle Assess* 2009;14:547–59.
- [162] Singh B, Strømman AH, Hertwich E. Lifecycle assessment of natural gas combined cycle power plant with post-combustion carbon capture, transport and storage. *Int J Greenh Gas Control* 2011;5:457–66.
- [163] Elzahabi M, Yong RN. pH influence on sorption characteristics of heavy metal in the vadose zone. *Eng Geol* 2001;60:61–8.
- [164] Kruse H, Tekiels M. Calculating the consequences of a CO₂-pipeline rupture. *Energy Convers* 1996;37:1013–8.

- [165] International Energy Agency Report. Barriers to overcome in implementation of CCS: rules and standards for the transmission and storage of CO₂. IEA Greenhouse Gas R&D Programmes, PH4/23; 2003.
- [166] Turner R, Hardy N, Hooper B. Quantifying the risks associated with a CO₂ sequestration pipeline: a methodology and case study. Camberra, CRC for Greenhouse Gas Technologies (CO₂CRC); 2003.
- [167] Lindeberg E, Bergamo P. The long-term fate of CO₂ injected into an aquifer. In: Proceedings of the 6th international conference on greenhouse gas control technologies. Gale JJ, Kaya Y, editors. V1. Amsterdam: Pergamon; 2003. p. 489–94.
- [168] Celia MA, Nordbotten JM, Bachuc S, Dobossya M, Courta B. Risk of leakage versus depth of injection in geological storage. *Energy Procedia* 2009;1:2573–80.
- [169] Pruess K. Numerical simulation of CO₂ leakage from a geologic disposal reservoir, including transitions from super- to subcritical conditions, and boiling of liquid CO₂. *Soc Pet Eng SPE J*. 2004;9:237–48.
- [170] Lewicki JL, Oldenburg C, Dobeck L, Spangler L. Surface CO₂ leakage during the first shallow subsurface CO₂ release experiment. Lawrence Berkeley National Laboratory. 2008.
- [171] Watson TL, Bachu S. Evaluation of the potential for gas and CO₂ leakage along wellbores. *Soc Pet Eng SPE Drill Complet* 2009;24:115–26.
- [172] Bachu S. CO₂ storage in geological media: role, means, status and barriers to deployment. *Prog Energy Combust Sci* 2008;34:254–73.
- [173] Celia MA, Bachu S, Nordbotten JM, Gasda SE, Dahle HK. Quantitative estimation of CO₂ leakage from geological storage: analytical models, numerical models and data needs. In: Proceedings of the 7th Greenhouse Gas Technology, Paper ID#228; 2004, 10 pp.
- [174] Nordbotten JM, Celia MA, Bachu S, Dahle HK. Semianalytical solution for CO₂ leakage through an abandoned well. *Environ Sci Technol* 2005;39:602–11.
- [175] Nordbotten JM, Kavetski D, Celia MA, Bachu S. Model for CO₂ leakage including multiple geological layers and multiple leaky wells. *Environ Sci Technol* 2009;43:743–9.
- [176] Hildenbrand A, Scholmer S, Krooss BM. Gas breakthrough experiments on fine-grained sedimentary rocks. *Geofluids* 2002;2:3–23.
- [177] Krooss BM, Leythaeuser D, Schaefer RG. The quantification of diffusive hydrocarbon losses through cap rocks of natural gas reservoirs – a reevaluation. *AAPG Bull* 1992;76:403–6.
- [178] Li Z, Dong M, Li S, Huang S. CO₂ sequestration: depleted oil and gas reservoirs–caprock characterization and storage capacity. *Energy Convers Manag* 2006;47:1372–82.
- [179] International Energy Agency GHG. Wellbore integrity network summary report, 2012/01; 2012.
- [180] Lewicki JL, Birkholzer J, Tsang CF. Natural and industrial analogues for leakage of CO₂ from storage reservoirs: identification of features, events, and processes and lessons learned. *Environ Geol* 2007;52:457–67.
- [181] Ziska LH, Sicher RC, Bunce JA. The impact of elevated carbon dioxide on the growth and gas exchange of three C₄ species differing in CO₂ leak rates. *Physiol Plant* 1999;105:74–80.
- [182] Skinner L. CO₂ blowouts: an emerging problem. *World Oil* 2003;224:223–38.
- [183] Saripalli KP, Mahasenan NM, Cook EM. Risk and hazard assessment for projects involving the geological sequestration of CO₂. In: Proceedings of the 6th international conference on greenhouse gas control technologies. Gale JJ, Kaya Y, editors, vol. V1. Amsterdam: Pergamon; 2003. p. 511–6.
- [184] Allen DJ, Brent GF. Sequestering CO₂ by mineral carbonation: stability against acid rain exposure. *Environ Sci Technol* 2010;44:2735–9.
- [185] Enting IG, Etheridge DM, Fielding MJ. A perturbation analysis of the climate benefit from geosequestration of carbon dioxide. *Int J Greenh Gas Control* 2008;2:289–96.
- [186] Arts R, Eiken O, Chadwick A, Zweigel P, Van der Meer L, Zinsner B. Monitoring of CO₂ injected at Sleipner using time-lapse seismic data. *Energy* 2004;29:1383–92.
- [187] Bannister S, Nicol A, Funnel R, Etheridge D, Christenson B, Underschultz J, et al. Opportunities for underground geological storage of CO₂ in New Zealand, report CCS-08/11, monitoring and verification methodologies. GNS Science Report 2009/64; 2009. 101 pp.
- [188] Kiessling D, Schmidt-Hattenberger C, Schuett H, Schilling F, Kruegera K, Schoebel B, et al. Geoelectrical methods for monitoring geological CO₂ storage: first results from cross-hole and surface–downhole measurements from the CO₂SINK test site at Ketzin (Germany). *Int J Greenh Gas Control* 2010;4:816–26.
- [189] Bielinski A, Kopp A, Schutt H, Class H. Monitoring of CO₂ plumes during storage in geological formations using temperature signals: numerical investigation. *Int J Greenh Gas Control* 2008;2:319–28.
- [190] Vasco DW, Rucci A, Ferretti A, Novali F, Bissell RC, Ringrose PS, et al. Satellite-based measurements of surface deformation reveal fluid flow associated with the geological storage of carbon dioxide. *Geophys Res Lett* 2010;37: L03303.
- [191] Jenkins CR, Cook PJ, Ennis-King J, Underschultz J, Boreham C, Dance T, et al. Safe storage and effective monitoring of CO₂ in depleted gas fields. *PNSA* 2012;109/2:35–41.
- [192] Riding JB, Rochelle CA. The IEA Weyburn CO₂ monitoring and storage project. Final report of the European research team. British Geological Survey Research Report RR/05/03. 2005 (54 pp.).
- [193] Schilling F, Borm G, Wurdemann H, Moller F, Kuhn M. Status report on the first European on-shore CO₂ storage site at Ketzin (Germany). *Energy Procedia* 2009;1:2029–35.
- [194] International Energy Agency Report (2009), Technology Roadmap: Carbon capture and storage, OECD/IEA, Paris, Available at: www.iea.org/roadmaps/ccs_roadmap.asp.
- [195] DECC. 2011 UK Greenhouse Gas Emissions, Final Figures. London, UK: Department of Energy & Climate Change; 2013.
- [196] Page SC, Williamson AG, Mason IG. Carbon capture and storage: fundamental thermodynamics and current technology. *Energy Policy* 2009;37:3314–4424.
- [197] Dahowski RT, Davidson CL, Dooley JJ. Comparing large scale CCS deployment potential in the USA and China: a detailed analysis based on country-specific CO₂ transport & storage cost curves. *Energy Procedia* 2011;4:2732–9.
- [198] Dahowski RT, Davidson CL, Li XC, Wei N. A \$70/tCO₂ greenhouse gas mitigation backstop for China's industrial and electric power sectors: insights from a comprehensive CCS cost curve. *Int J Greenh Gas Control* 2012;11:73–85.
- [199] Rubin ES, Chen C, Rao AB. Cost and performance of fossil fuel power plants with CO₂ capture and storage. *Energy Policy* 2007;35:4444–54.
- [200] Khesghi HS, Thomann H, Bhone NA, Hirsch RB, Parker ME, Teletzke GF. Perspectives on CCS cost and economics. *SPE Econ Manag* 2012;4/1:24–31.
- [201] EU, Communication from the Commission to the European Parliament, the Council of the European Economic and Social Committee and the Committee of the Regions. Supporting early demonstration of sustainable power generation from fossil fuels. Brussels, Commission of the European Communities; 2008.
- [202] Rubin ES. Understanding the pitfalls of CCS cost estimates. *Int J Greenh Gas Control* 2012;10:181–90.
- [203] Simbeck D, Beecy D. The CCS paradox: the much higher CO₂ avoidance costs of existing versus new fossil fuel power plants. *Energy Procedia* 2011;4:1917–24.
- [204] Kennedy M, Basu B. An analysis of the climate change architecture. *Renew Sustain Energy Rev* 2014;34:185–93.
- [205] Green-Alliance. The CCS challenge: the practical potential for gas carbon capture and storage in Europe in 2030; 2012.
- [206] Fennell PS, Florin N, Napp T, Hills T. CCS from industrial sources. COP18-Collection: vol. 2012, COP18, 17. doi: 10.5339/stp.2012.ccs.17@cop18.2012.2012.issue-1; 2012.
- [207] Minchener AJ. Gasification based CCS challenges and opportunities for China. *Fuel*. Available on line <http://dx.doi.org/10.1016/j.fuel.2013.02.046>; 2013.
- [208] Woolf D, Amonette JE, Street-Perrott FA, Lehmann J, Joseph S. Sustainable biochar to mitigate global climate change. *Nat Commun* 2010;56. <http://dx.doi.org/10.1038/ncom1053> (1, Article no).
- [209] Darko Matovic. Biochar as a viable carbon sequestration option: global and Canadian perspective. *Energy* 2011;36:2011–6.
- [210] Lenton TM. The potential for land-based biological CO₂ removal to lower future atmospheric CO₂ concentration. *Carbon Manag* 2010;1:145–60.
- [211] International Energy Agency Report. CO₂ capture as a factor in power station investment decisions. Report No. 2006/8, May; 2006.
- [212] Ritter JA. Radically new adsorption cycles for carbon dioxide sequestration. University coal research contractors review meeting, U.S. DOE National Energy Technology Laboratory. Pittsburgh, Pennsylvania; June 10, 2004.
- [213] Andus H. Leading options for the capture of CO₂ at power stations. In: Proceedings of the 5th international conference on greenhouse gas control technology. Cairns, Australia; August 13–16, 2000.
- [214] Yun G, Liu D, Wu T, Wu J, Ji X, Zhuang L. CO₂ capture and utilization for enhanced oil recovery (EOR) and underground storage: a case study in Jilin Field, China. *Stud Surf Sci Catal* 1998;114:201–6.
- [215] Qu X, Liu L, Gao Y, Liu N, Li F, Liu H. Geology record of mantle-derived magmatogenic CO₂ gas in the northeastern China. *Acta Pet Sin* 2010;31:61–7.
- [216] ZERO website: (<http://www.zeroco2.no/projects/weyburn-midale-co2-project>).
- [217] Emberley S, Hutcheon I, Shevalier M, Durocher K, Mayer B, Gunter WD, et al. Monitoring of fluid-rock interaction and CO₂ storage through produced fluid sampling at the Weyburn CO₂-injection enhanced oil recovery site, Saskatchewan, Canada. *Appl Geochem* 2005;20:1131–57.
- [218] White D. Monitoring CO₂ storage during EOR at the Weyburn-Midale Field. *Lead Edge* 2009;28:838–42.
- [219] Kane, B. (2010) CO₂ sequestration capability: where are we? An overview of the advances being made in CO₂ geologic storage by DOE/NETL's regional carbon sequestration partnership. US Carbon Sequestration Council. (http://www.uscsc.org/Files/Admin/Educational_Papers/8.%20CO2_Sequestration_Capability_-_Where_Are_We_31July10.pdf).
- [220] Esser R, Levey R, Mcpherson B, O'Dowd W, Litynski J, Plasynski S. (Geology conference series 2010). Preparing for a carbon constrained world; overview of the United States regional carbon sequestration partnerships programme and its Southwest Regional Partnership, vol. 7. London, Petroleum: Geological Society; 2010; 1189–95.
- [221] Bachu S, Shaw J. CO₂ storage in oil and gas reservoirs in Western Canada: effect of aquifers, potential for CO₂-flood enhanced oil recovery. In: Proceedings of the 7th international conference on greenhouse gas control technologies; 2004.
- [222] Westermarck RE, Schmeling J, Dauben DL, Robinowitz S, Weyland HV. Application of horizontal waterflooding to improve oil recovery from old fields. In: SPE/DOE symposium on improved oil recovery. Oklahoma, USA; 22–26 April 2006. isbn:978-1-55563-157-4.
- [223] Nader S. Paths to a low-carbon economy – the Masdar example. *Energy Procedia* 2009;1:3951–8.
- [224] Kumar S, Zarzour O, Gupta A. Challenges in design of post combustion CO₂ capture facilities. In: Proceedings of the Abu Dhabi international petroleum

- exhibition and conference. Abu Dhabi, UAE; 1–4 November 2010. isbn:978-1-55563-315-8.
- [225] Friedmann SJ. Carbon capture and sequestration technologies: status and future deployment. UCRL-BOOK-235276, (<https://e-reports-ext.llnl.gov/pdf/353346.pdf>); 2007.
- [226] Lee ZH, Lee KT, Bhatia S, Mohamed AR. Post-combustion carbon dioxide capture: Evolution towards utilization of nanomaterials. *Renew Sustain Energy Rev* 2012;16:2599–609.
- [227] From Hitachi Power Systems America, Ltd. website (http://www.hitachipowersystems.us/supportingdocs/forbus/hpsa/technical_papers/EP2005.pdf).
- [228] Reeves S, Oudinot A. The Tiffany Unit N2 – ECBM Pilot: a reservoir modeling study. U.S. Department of Energy Topical Report DE-FC26-ONT40924; 2004.
- [229] Cochrane T, Oudinot AY, Koperna JG, Philip ZG, Liu N, Heath JE, et al. CO₂ injection performance in the Fruitland Coal Fairway, San Juan Basin: results of a field pilot. In: Proceedings of the SPE international conference on CO₂ capture, storage, and utilization. San Diego, California, USA; 2–4 November 2009.
- [230] Wong S, Gunter WD. Testing CO₂-enhanced coalbed methane recovery. *Greenh Issues, IEA Greenhouse Gas R&D Program*, 45, November 1–3.
- [231] Smith DH, Bromhal G, Sams WN, Jikich S, Ertekin T. Simulating carbon dioxide sequestration/ECBM production in coal seams: effects of permeability anisotropies and the diffusion-time constant. *SPE Reserv Eval Eng* 2005;8:156–163.
- [232] Van Alphen K, Noothout PM, Hekkert MP, Turkenburg WC. Evaluating the development of carbon capture and storage technologies in the United States. *Renew Sustain Energy Rev* 2010;14:971–86.
- [233] Gunter WD, Bachu S, Law DHS. Technical and economic feasibility of CO₂ disposal in aquifers within the Alberta sedimentary basin, Canada. *Energy Convers Manag* 1996;37:1135–42.
- [234] Bachu S, Gunter WD. (Special Publications). Acid–gas injection in the Alberta basin, Canada: a CO₂-storage experience, vol. 233. London: Geological Society; 2004; 225–34.
- [235] Baklid A, Korbol R, Owren G. Sleipner West CO₂ disposal, CO₂ injection into a shallow underground aquifer. In: Proceedings of the 1996 SPE annual technical conference and exhibition. Denver, Colorado; 6–9 October 1996. Society of Petroleum Engineers Paper SPE 36600.
- [236] Hansen H, Eiken O, Aasum TO. Tracing the path of carbon dioxide from a gas-condensate reservoir, through the amine plant and back into a subsurface aquifer. Case study: the Sleipner area. Norwegian North Sea. *SPE 96742* 2005.
- [237] Riddiford F, Wright I, Bishop C, Espie T. Monitoring geological storage the in Salah gas CO₂ storage project. In: Proceedings of the 7th international conference on greenhouse gas control technologies. Vancouver, Canada; 5 September 2004.
- [238] Maldal T, Tappel IM. CO₂ underground storage for Snøhvit gas field development. *Energy* 2004;29:1403–11.
- [239] Kaarstad, O. Presentation in IEA Asia Pacific Conference on Zero Emission Technologies. Queensland, Australia; 18 February 2004.
- [240] Barnes DA, Bacon DH, Kelley SR. Geological sequestration of carbon dioxide in the Cambrian Mount Simon Sandstone: regional storage capacity, site characterization, and large-scale injection feasibility, Michigan Basin. *Environ Geosci* 2009;16:163–83.
- [241] Barnes DA, Harrison WB III, Wahr, A. Assessment of regional geological carbon sequestration potential in upper Silurian to Middle Devonian Strata of the Michigan Basin. In: M. Grobe, J.C. Pashin and R.L. Dodge, (Eds.), Carbon dioxide sequestration in geological media-State of Science, AAPG Studies in Geology 59, 99–123.
- [242] Litynski J, Plasynski S, Spangler L, Finley R, Steadman E, Ball D, et al. U.S. department of energy's regional carbon sequestration. Partnership program: overview. *Energy Procedia* 2009;1:3959–67.
- [243] Rodosta T, Litynski J, Plasynski S, Spangler L, Finley R, Steadman E, et al. US Department of Energy's regional carbon sequestration partnership initiative: update on validation and development phases. *Energy Procedia* 2011;4:3457–64.
- [244] Hovorka SD, Meckel TA, Trevino RH, Lu J, Nicot JP, Choi JW, et al. Monitoring a large volume CO₂ injection: year two results from SECARB project at Denbury's Cranfield, Mississippi, USA. *Energy Procedia* 2011;4:3478–85.
- [245] Koperna G, Riestenberg D, Kuuskraa V, Rhudy R, Trautz R, Hill GR, et al. The SECARB anthropogenic test: a US integrated CO₂ capture, transportation and storage test. *Int J Clean Coal Energy* 2012;1:13–26.
- [246] Gupta, N. The Ohio river valley CO₂ storage project numerical simulation and risk assessment report. U.S. Department of Energy Report Project #: DE-AC26-98FT40418; 2008.
- [247] Finley R. An integrated carbon sequestration deployment test at Decatur, Illinois. 2009 Portland GSA annual meeting Paper No. 22-14; 18–21 October 2009.
- [248] Hnottavange-Telleen K, Krapac I, Vivalda C. Illinois Basin-Decatur Project: initial risk-assessment results and framework for evaluating site performance. *Energy Procedia* 2009;1:2431–8.
- [249] Leetaru HE, Couëslan M, McBride J. Seismic reflection data interpretation of the proposed Illinois Basin-Decatur carbon sequestration site topical report 1: an assessment of geological carbon sequestration options in the Illinois Basin: Phase III. Report submitted by Illinois State Geological Survey to US DOE; 2009.
- [250] Cook PJ. Demonstration and deployment of carbon dioxide capture and storage in Australia. *Energy Procedia* 2009;1:3859–66.
- [251] Boiardi, B. CO₂ capture and geological sequestration: the first Italian experience. 34th course of the international school of geophysics on densely populated settings: the challenge of siting geological facilities for deep geothermics, CO₂ and natural gas storage, and radioactive waste disposal. Eric; September 25–30, 2010.
- [252] Flett M, Beacher G, Brantjes J, Burt A, Dauth C, Koelmeyer F, et al. Gorgon project: subsurface evaluation of carbon dioxide disposal under Barrow Island. In: Proceedings of the SPE Asia Pacific oil and gas conference and exhibition. Perth, Australia; 20–22 October 2008. isbn:978-1-55563-202-1.
- [253] Flett M, Brantjes J, Gurton R, McKenna J, Tankersley T, Trupp M. Subsurface development of CO₂ disposal for the Gorgon Project. *Energy Procedia* 2009;1:3031–8.
- [254] Hooper BN. The Latrobe Valley post-combustion capture project. *Energy Procedia* 2009;1:1367–72.
- [255] Friedmann SJ. Emerging technical challenges of 5-million-ton/yr injections. In: Proceedings of the SPE international conference on CO₂ capture, storage, and utilization. San Diego, California, USA; 2–4 November 2009.